



Keychron

M3 Wireless Mouse User Manual

IN THE BOX:

Mouse x 1

Type - C Cable x 1


Extension Adapter x 1

Type - A Receiver x 1

Type - C Receiver x 1

User Manual x 1

Type - A to Type - C Adapter x 1

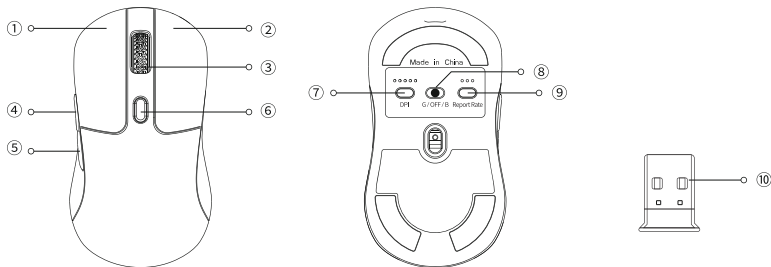


- ① Left button ② Right button ③ Middle wheel button ④ Forward button ⑤ Backward button
⑥ Middle button ⑦ DPI button ⑧ Modes toggle ⑨ Report rate button ⑩ 2.4GHz Type - A receiver

3 Modes of connection

Wired Mode:

1. When the mode switch is in "OFF" position, the mouse won't respond if the cable is not connected.
 2. Connect the cable to the TYPE-C port of the mouse and the USB port on the device. The mouse is ready to use while the backlit lights up.
- * When connected by cable, the mode will default to wired mode even if the toggle is in Bluetooth mode or 2.4GHz mode.




2.4GHz Mode:

1. Switch to "G" mode (2.4GHz mode), and the mouse will automatically turn on 2.4GHz pairing. The RGB light on the mouse wheel will slowly flash green.
2. Find the 2.4GHz receiver and connect it to the device's USB. Once successfully connected, the RGB light on the mouse wheel will turn green and stay on for 3 seconds, then dims off.


3. In 2.4GHz pairing mode, the RGB light on the side of the mouse wheel will slowly blink green for 3 minutes. If it's not connected within 3 minutes, the RGB light on the mouse wheel will turn off. If you need to reconnect, hold both the "Left button + Forward button" for 3 seconds to re-enter pairing mode.

* If you need to repair the connection in 2.4GHz mode, please unplug the 2.4GHz receiver first. Then, hold both the "Left button + Forward button" for 3 seconds, wait for the green light indicator to start flashing, and plug the 2.4GHz receiver back in to complete the pairing process.


Note: It is recommended that when pairing the mouse in 2.4GHz mode, the mouse should be within 20cm of the receiver.

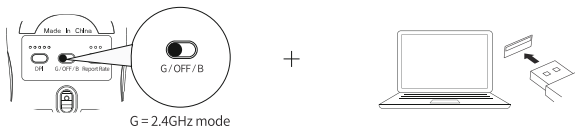

Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4GHz receiver somewhere on your desk close to your mouse for a lower rate of latency and fewer signal interferences.




simultaneously hold for 4 seconds
(to enter the forced pairing mode)

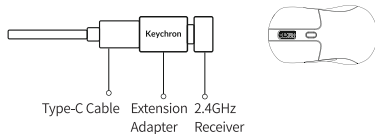

Bluetooth mode


1. Switch to "B" Mode (Bluetooth), and the mouse will automatically turn on Bluetooth pairing mode. The RGB light on the side of the mouse wheel will slowly flash blue.
2. Open the Bluetooth settings, search for a device named "Keychron M3", then click "connect" to complete pairing.
3. When in Bluetooth pairing mode, the RGB light on the side of the wheel will slowly blink in blue for 3 minutes. If it's not connected within 3 minutes, the RGB light on the mouse wheel will turn off. If you need to reconnect, you need to hold the "Left button + Forward button" for 3 seconds to re-enter pairing mode. The mode indicator will slowly blink blue.
4. If the mouse is in Bluetooth mode and needs to pair with a new device, hold both the "Left button + Forward button" for 3 seconds and wait for the blue light to flash on. At this point, Bluetooth has re-entered pairing mode, and you can connect the new device to the mouse.



Simultaneously hold for 3 seconds
(to re-enter pairing mode)


Status indicator

2.4GHz Mode	When the indicator on the side of the mouse wheel: *Slowly blinks green - Ready to be paired. *Quickly blinks green - Pairing with the previous device.
Bluetooth Mode	When the indicator on the side of the mouse wheel: *Slowly blinks blue - Ready to be paired. *Quickly blinks blue - Pairing with the previous device.
Low power	The indicator on the side of the mouse wheel will slowly blinks red.




DPI indicator

White light	400 DPI	Yellow light	3200 DPI
Green light	800 DPI	Red light	5000 DPI
Blue light	1600 DPI (default)		



Report Rate indicator

Report rate indicator	Report rate / Hz	Available modes
White light	125	2.4G / BT / Wired
Blue light	500	2.4G / Wired
Red light	1000	2.4G / Wired(default)



Auto-Sleep mode


Auto-Sleep mode will not be activated when in wired mode. When in 2.4GHz mode or Bluetooth mode, the mouse will go to Auto-Sleep mode after 15 minutes of sitting idle to save the battery. Move or click the mouse to wake it up.

Driver Software

The mouse driver can be selected on launcher.keychron.com. If the driver software can't connect to the mouse, please contact us for technical support.

How to factory reset

Hold down both the "DPI button" and "Report rate button" for 3 seconds, and all the LED lights on the mouse will blink. It will blink three times to indicate that the factory reset is successful.



Simultaneously hold for 3 seconds
(starts factory reset)

Charging indicator explanation

Fully Charged	The RGB backlit on the side of the mouse wheel will light up GREEN for 30s and then dim off.
Low Power	The RGB backlit on the side of the mouse wheel will slowly blink RED.

* The mouse is compatible with all USB ports. For the best signal and charging speed, connecting to the USB3.0 port is recommended when charging or in use.

* The mouse can be charged in 2.4GHz mode, Bluetooth mode and wired mode.

* If the mouse is connected by the USB Type - C cable when charging but not paired with any devices:

- The RGB backlit on the side of the mouse wheel will blink RED for 10s, then dim off when charging.
- The RGB backlit on the side of the mouse wheel will blink GREEN for 30s, then dim off when fully charged.

Note: The product supports up to 5V charging voltage and 300 mA charging current. We are not responsible for any problems caused by improper recharging.

Mouse specification

Size	125*68*41mm	Battery capacity	600mAh
Weight	79 ± 3g	Usage duration	95 Hours (Bluetooth mode) 75 Hours (1000Hz)
Report Rate (polling rate)	125Hz(White) - 500Hz(Blue) - 1000Hz(Red)		
Sensor	PixArt 3311	Recharge time	2.5 Hours
Resolution	100 - 12000DPI	Charging port	Type - C
Mouse micro switches	Kailh GM8.0 (80 million clicks life time)	Connection mode	2.4GHz - Bluetooth - Wired
2.4GHz / Bluetooth connection range	Approx 10m of open space	Device name	Keychron M3

Keychron, Inc.

Dover, DE 19901, United States

Find us at:

<https://www.keychron.com>

support@keychron.com

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China