


Cat.5eF/UTP Patch Cord

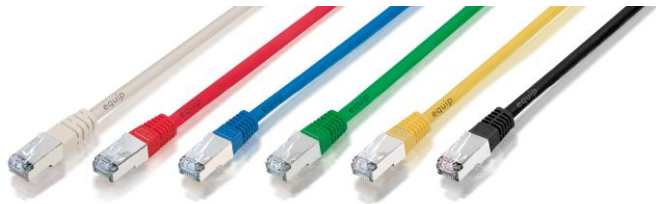


The equip® Cat.5e F/UTP Patch Cable is composed of high-quality materials and fully-examined to meet ANSI/TIA-568-C.2 channel standard, delivering ultrahigh and error-free performance in the most demanding network environments.

| Key Feature

- Stranded AWG 26 Patch Cord with 100MHz Performance.
- High performance and easy installation
- Gold Plating Pin Provides the Highest Interconnect Reliability
- Cable Length Printing on Plug

| Structure

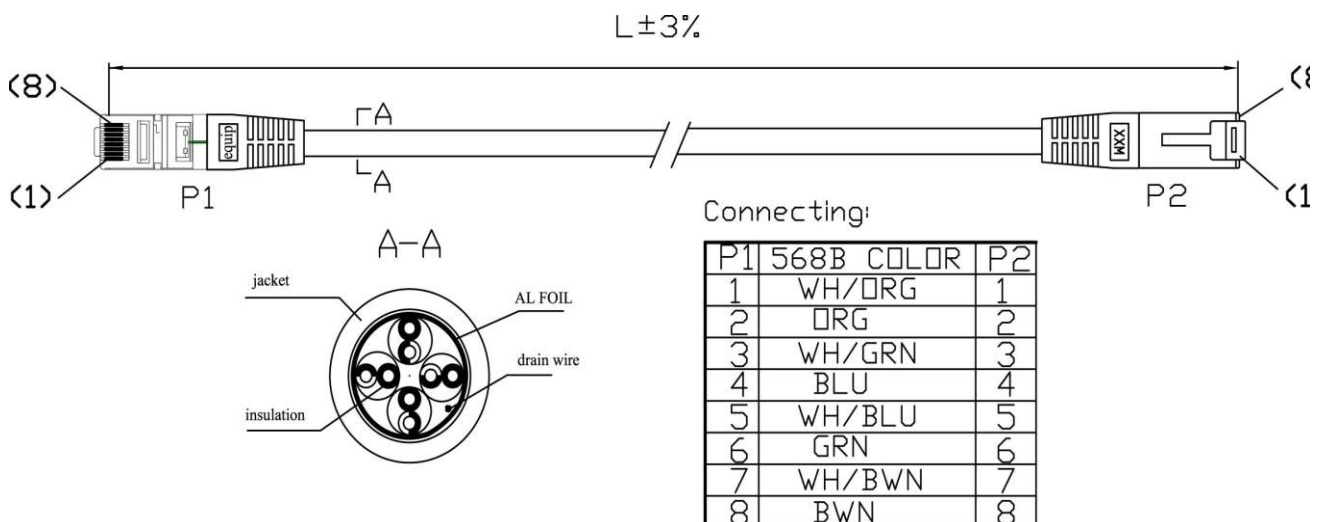

| Specification

Conductor	Construction	26AWG, 7/0.16 ± 0.0015mm
Insulation	Thickness	MIN at any point: 0.18mm MAX AVG:0.20mm
	Diameter	0.90± 0.02
	Colors	Blue/White-Blue, Orange/White-Orange, Green/White-Green, Brown/White-Brown
Jacket	Material	PVC
	Thickness	MIN at any point: 0.45mm MAX AVG: 0.55mm
	Diameter	5.6± 0.3
	Marking	equip CAT.5E F/UTP PATCH CABLE 4PR 26AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-c.2
Connector	RJ45 Plug	8P8C, 3u"
Typical Applications		IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE- IEEE 802.5 16 MB; ISDN; TPDDI; ATM

| Ordering Information



	Beige	Red	Blue	Green	Black	Yellow
0.25m	225413	225423	225433	225443	225453	225463
0.5m	225417	225427	225437	225447	225457	225467
1.0m	225410	225420	225430	225440	225450	225460
2.0m	225411	225421	225431	225441	225451	225461
3.0m	225412	225422	225432	225442	225452	225462
5.0m	225414	225424	225434	225444	225454	225464
7.5m	225415	225425	225435	225445	225455	225465
10m	225416	225426	225436	225446	225456	225466
15m	225418	225428	225438	225448	225458	225468
20m	225419	225429	225439	225449	225459	225469

Packing: Poly bag