
Datenblatt - Fiche technique - Data sheet


21.15.0821

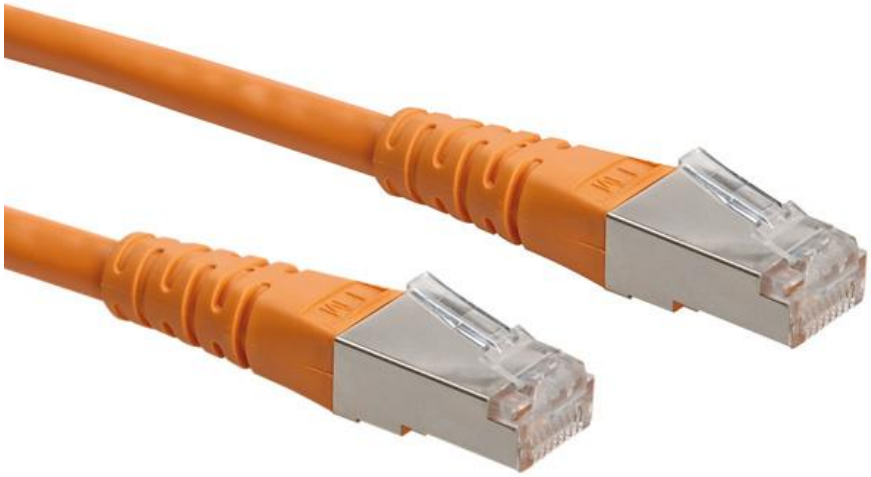

ROLINE S/FTP-(PiMF-)Patchkabel Kat.6, orange, 1,5m

Cordon ROLINE Cat.6 S/FTP (PiMF) orange, 1,5m

ROLINE S/FTP (PiMF) Patch Cord, Cat.6, orange, 1.5 m

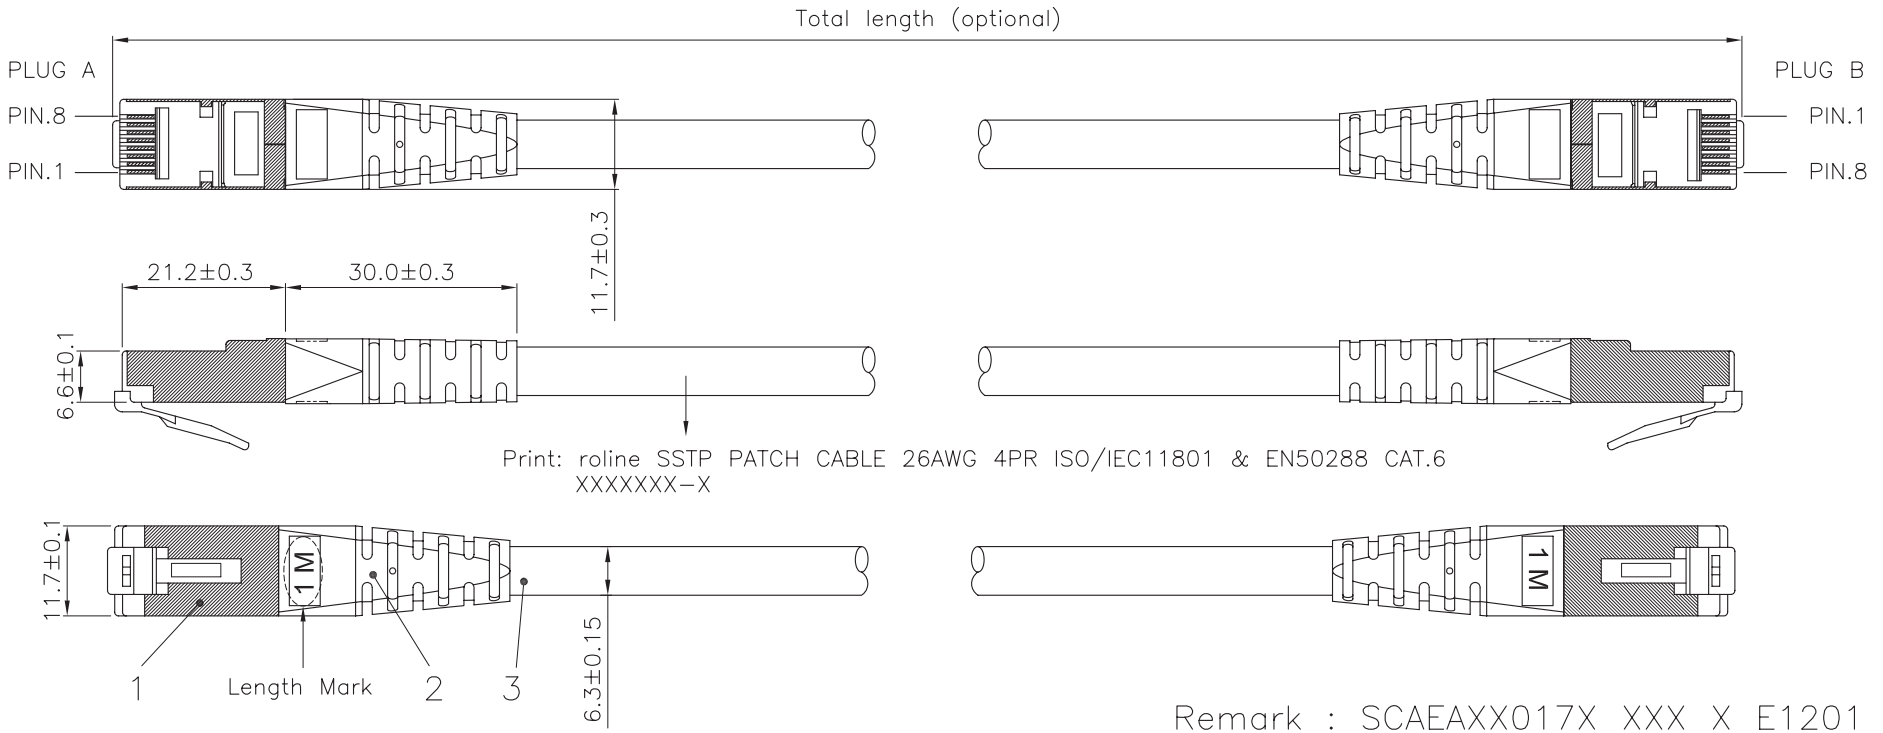

Remack#

21.15.0823	1.5m	grey	21.15.1346	2.0m	white
21.15.0824	1.5m	red	21.15.1356	3.0m	white
21.15.0825	1.5m	yellow	21.15.1366	5.0m	white
21.15.0826	1.5m	green	21.15.1376	7.0m	white
21.15.0827	1.5m	blue	21.15.1386	10m	white
21.15.0828	1.5m	black	21.15.1396	15m	white
21.15.0829	1.5m	white	21.15.1406	20m	white
21.15.1316	0.3m	white			
21.15.1326	0.5m	white			
21.15.1336	1.0m	white			

Remark : SCAEAXX017X XXX X E1201

(1) (2) (3) (4)

(1) XX : Jacket Color
01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
08=Green(RAL6029), 09=Orange(RAL2003),10=Purple(RAL4005)
11=Pink(RAL4003)

(2) X : Wiring
1=T568A, 2=T568B, 3=T568A & T568B combination

(3) XXX : Length

(4) Length Unit : 1=cm, 2=meter, 3=feet.
(3)(4) : 0301=0.3meter(30cm) 0501=0.5meter(50cm),
0012=1meter, 0102=10meter
0033=3feet, 0103=10feet

Specification :

Material :

1. RJ45 Plug : (JE P/N : P028850)
   1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
   1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
   1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
   1-4. Shield : Bronze with Nickel plated.
2. Molding : PVC.
3. Cable :
   3-1. Jacket : PVC.
   3-2. Conductor : 26 AWG stranded copper.
   3-3. Isolation : PE.
   3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.

GENERAL TOLERANCE OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	10.JAN.2011	Abby	**Rotronic Co.,LTd.**
CHECK	10.JAN.2011	Maer	
APPROVAL	10.JAN.2011	YTY	
	DATE	NAME	ITEM NO.:SCAEAXX017XXXXXE1201
SCALE 1/1(A4)	UNIT mm		DES.: C6 S/FTP Patch Cord
	DRAWING NO.	SCAEAXX017XXXXXE1201(SA1)	A1
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1

0 10cm