


LC / SC Optical Fiber Patch Cord, OM3


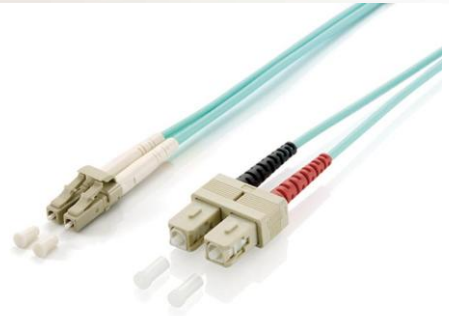


The equip® Optical Fiber Patch Cord is made of superior materials to ensure an end-face geometry connection with lower return loss and insertion loss. The Fiber Optic Patch Cord series comes with a comprehensive collection of lengths and connectors to fulfill your demand for the deployment.

| Key Feature

- Core diameter: 50/125µm
- Multi Mode, Duplex
- Connector: ceramic-ferrule
- Cladding: low smoke and zero halogen
- Cable spec: I-VH 2 x 1G
- Cable jacket color: turquoise
- Each cable includes a measure protocol

| Structure

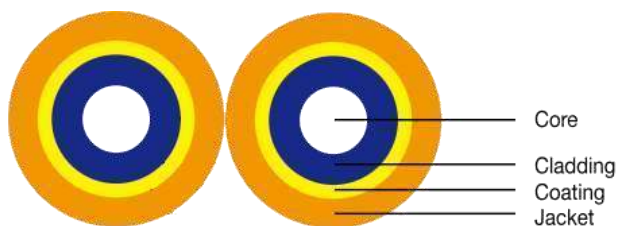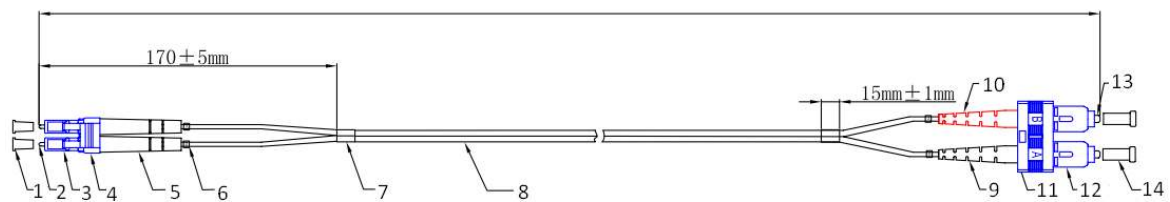

- 1 LC dust cap, white
- 2 LC/UPC multi-mode ferrule $\Phi 126-128\mu\text{m}$
- 3 LC 3.0 multi-mode connector, beige
- 4 LC clip, beige
- 5 LC 3.0 boot, white
- 6 Ring (A, B)
- 7 Heat shrink tube, black
- 8 Optical fiber cable $\Phi 3.0$ 50/125µm OM3 duplex, LSZH
- 9 SC 3.0 boot, black
- 10 SC 3.0 boot, red
- 11 SC clip, beige
- 12 SC 3.0 multi-mode connector, blue
- 13 SC/UPC multi-mode ferrule $\Phi 126-128\mu\text{m}$
- 14 SC dust cap, transparent

| Specification

Core	50 ± 2.5μm (YOFC)
Cladding	124.8 ± 1.0μm
Bare Fiber Diameter	245 ± 7μm
Tight Buffer Fiber Diameter	0.9 ± 0.05mm
Tight Buffer Fiber Color	White, Orange
Aramid yarn Kevlar (Dupont)	4 sheaf
Max Load	Long Term 100N
	Short Term 200N
Bending Radius (cm)	Dynamic 20XD (D: Cable axis)
	Static 10XD (D: Cable axis)
Crush Resistance (N/100mm)	Long Term 100
	Short Term 500
Attenuation (dB/km)	@850nm ≤ 2.3
	@1300nm ≤ 0.6
Over Filled Launch Bandwidth (Mhz.km)	@850nm ≥ 700
	@1300nm ≥ 500
Availability Bandwidth (Mhz.km)	@850nm ≥ 950
	@1300nm ≥ 500

| Ordering Information

Length (meter)	PN
0.5	255319
1	255311
2	255312
3	255313
5	255315
10	255316
15	255317
20	255318

Packing: PE bag