

H.264 HDMI Over IP Video Wall Extender

User Manual

Models 208338 & 208345



intellinetnetwork.com

Important: Read before use. • Importante: Leer antes de usar.



CONTENTS

Introduction	3
Setup Components	3
Hardware Features	3
Transmitter.....	3
Receiver	4
Installation Guide	4
Connect Devices.....	5
Hardware Installation	5
Video-wall Diagram	6
VESA Mounting	7
Installation Example	7
Management UI.....	8
Download the Management UI	8
Select Interface	8
Introduction to the Management UI	8
Management UI - Device.....	9
Advanced Device Settings	9
Management UI - Walls	10
Create New Video Wall	10
Set Display Position.....	11
Bezel Correction	11
Management UI - Management.....	12
About	13
Notes	13
Additional Information	14

Introduction

The H.264 HDMI Over IP Video Wall Extender offers a cost effective solution to complete a variety of AV setups, including point-to-point, one-to-many, many-to-many and video-wall configurations. Both the transmitter and receiver work together to provide Full-HD audio and video to TVs, projectors or monitors up to 100 m (330 ft.) with nearly zero latency. This Extender works with any HDMI source such as a Blu-ray disk player, DVD player, PC, notebook, gaming console (ex. SONY PlayStation®, Nintendo Switch™) and is HDCP compliant.

No software or utility is required to easily build a video-wall display. The transmitter (TX) and receiver (RX) include rotary switches to create the desired set up (e.g., a 10-position switch for 10 TX-RX pairings and 16-position switch for 1x2-, 2x2-, or 3x3-screen video-wall displays). When used with an IGMP-snooping-enabled Gigabit Ethernet network switch, point-to-point, one-to-many, many-to-many configurations can exist on the same IP LAN. This Extender is the perfect choice for displaying digital media in all kinds of environments and for all kinds of purposes, including for surveillance systems, digital signage, trade shows, campuses, airports, shopping centers and conference centers. Connect up to 10 Transmitters (#208338) and 246 Receivers (#208345).

Setup Components

- H.264 HDMI Over IP Video Wall Extender - Transmitter
- H.264 HDMI Over IP Video Wall Extender - Receiver
- Power adapters — 5 V / 2 A
- HDMI cables
- Mounting hardware (with Channel-ID selector tool)
- Hook-&-loop fastener
- Installation manual

Hardware Features


Transmitter



- 1 Reset
- 2 HDMI input port with lock
- 3 LEDs: status (upper, amber); power (lower, green)
- 4 Channel ID
- 5 LAN port
- 6 Power jack
- 7 Security-lock slot



Receiver

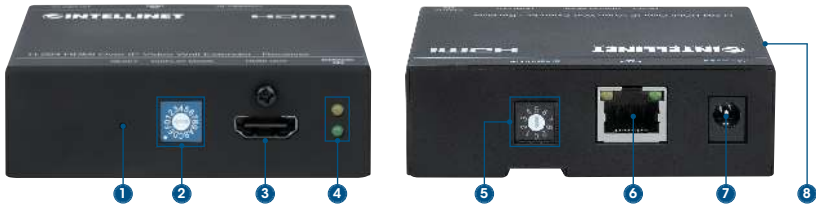

- 1 Reset
- 2 Video display ID
- 3 HDMI output port with lock
- 4 LEDs: status (upper, amber); power (lower, green)
- 5 Channel ID
- 6 LAN port
- 7 Power jack
- 8 Security-lock slot

Installation Guide

Complete setup with the instructions below. Images for the setups follow in the **Connect Devices** chapter.

- 1 Use HDMI cable to connect the HDMI Input port on the Transmitter to the HDMI Output port on your source.
- 2 Use HDMI cable to connect the HDMI Output port on the Receiver(s) to the HDMI Input port on your display(s).
- 3 Use Ethernet cable to complete the desired setup:
 - a **Point-to-point**: connect the LAN port on the Transmitter to the LAN port on the Receiver or to a network switch (to extend the signal).
 - b **One-to-many** and **many-to-many**: connect the LAN ports on the Transmitter(s) and Receiver(s) to a local area network through a Router and/or Switch hub.
- 4 Connect each transmitter and receiver to power with the included power adapters.
- 5 Use the channel-selector tool to match the channel IDs on the Transmitter and Receiver (**NOTE**: the devices will not connect automatically; they must be matched manually first).
- 6 To **create a video wall**, refer to the **Video-wall Diagram** section. Order your displays accordingly and set the Display ID on the receivers to the corresponding positions.



Connect Devices

Hardware Installation


Point-to-point

- Direct connect from Transmitter to Receiver unit.
- Transmitter unit to network switch to Receiver unit.



One-to-many


- Transmitter unit to an IGMP-snooping-enabled network switch to many Receiver units.
- Transmitter unit to network topology (must support IGMP snooping) to many Receiver units.

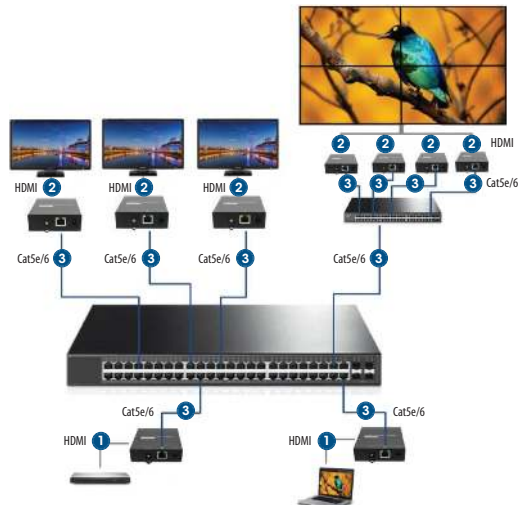




Many-to-many


- Many Transmitter units to an IGMP-snooping-enabled network switch to many Receiver units
- Many Transmitter units to network topology (must support IGMP snooping) to many Receiver units.

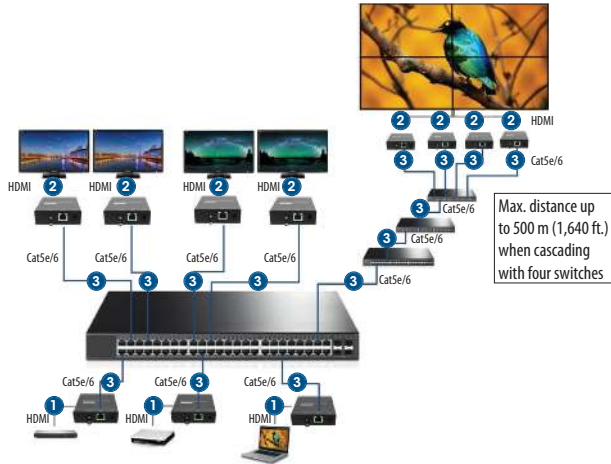

Video-wall Diagram

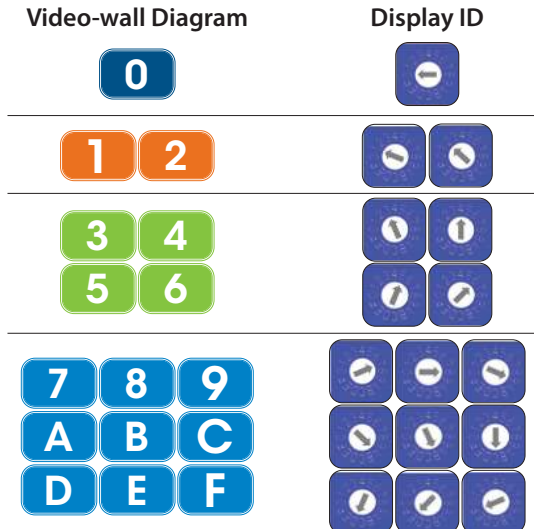

VESA Mounting

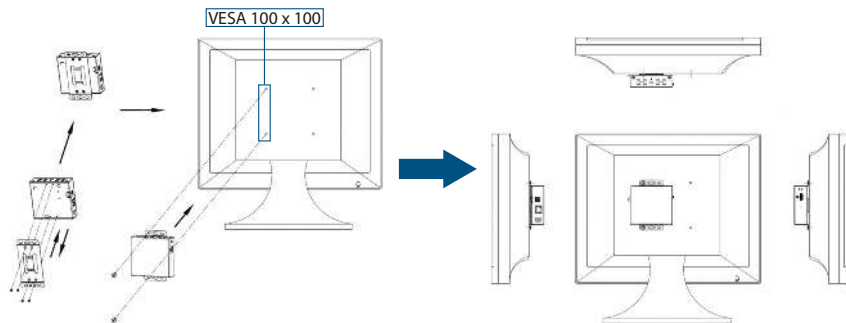


CAUTION! Use only the included power adapters. Using other power adapters may damage your device.
IMPORTANT! Use the correct adapter plug for your area/region. This adapter is for dry and indoor uses only.

Installation Example

1 Want to set up a 2x2 video wall?




2 You'll need these:

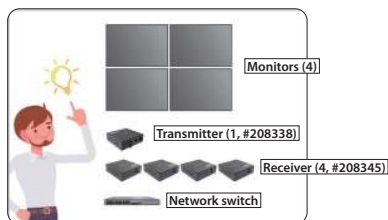


3 Select the TX / RX Channel ID



4 Select the RX Display ID



5 Device connections




6 Done!





Management UI

In One-to-many or Many-to-many setups, the transmitters and receivers in the Intellinet Network Solutions H.264 HDMI Over IP Video Wall Extender system can be conveniently managed through a Management User Interface (UI). This UI lets users to create and adjust settings for the connected units, see important information about them, create video walls and more. To log into the UI, use RJ45 cable to connect to the primary network switch for all Transmitter and Receiver devices in the setup. See the example setup that follows.

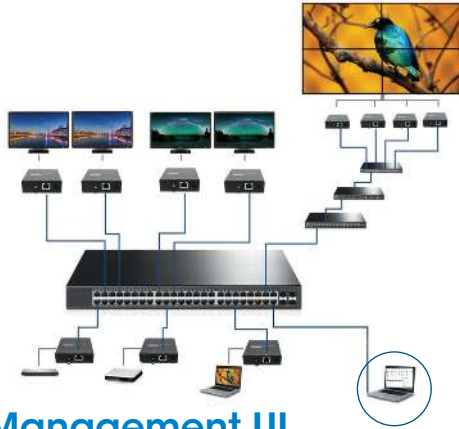


Download the Management UI

Visit the product page at intellinet-network.com/barcode/208338 and click the DOWNLOADS for available downloads. Click the icon titled **INTVWEGUI.exe** at the folder of the Management UI to launch the program.



Select Interface

Make sure your computer is on the the same local area network and select the network device named **Realtek PCIe GBE Family Controller**. Click "OK" to continue.



Introduction to the Management UI


The management UI includes four pages:

- **Device:** see the full information of connected Receivers and Transmitters
- **Walls:** create a new video wall
- **Management:** select or switch the video source for each created video wall; drag and drop the transmitters listed on the left to the video-wall setup shown on the right
- **About:** see publisher and UI version

Management UI - Device


See Receiver & Transmitter Information


The page shows the **Device name**, **MAC address**, **Device ID** and **State** of all Receivers and Transmitters. To edit the **Device name**, select a Receiver or Transmitter device and click the Edit icon on the top right side of the page.

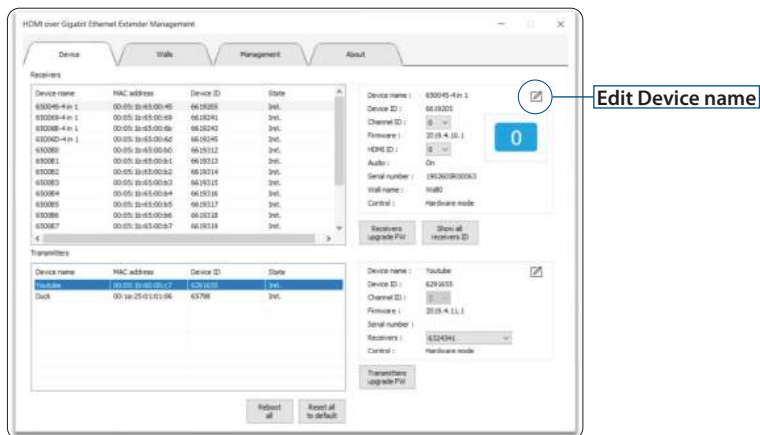

Advanced Device Settings

Right-click a device for these options: **Reboot**, **Reset to default**, **Audio On/Off**, **Show ID** and **Upgrade firmware**. A device goes to the bottom of the list after it is rebooted. **Show ID** shows the information on the display.

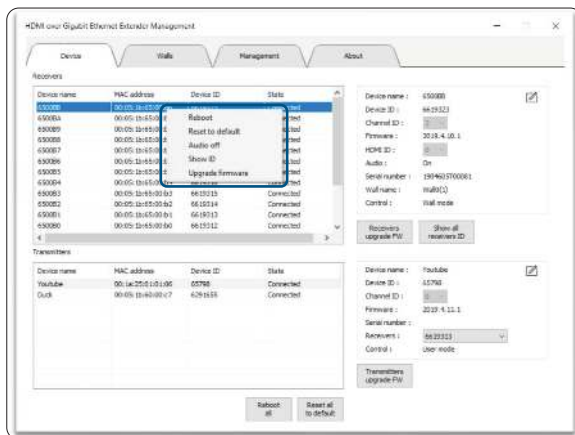

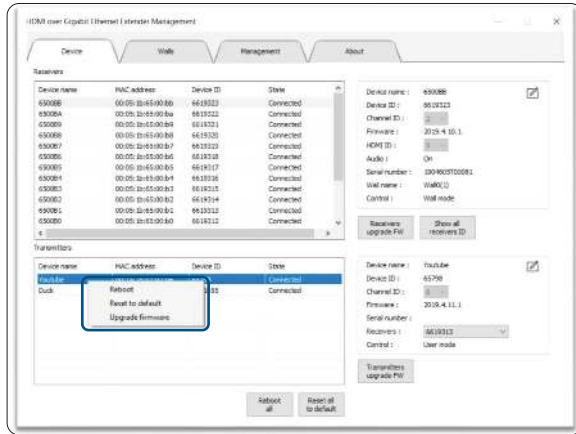


Management UI - Walls

Create New Video Wall

Follow the steps to create a new video wall:


- 1 Click **Create new wall** and select the number of Rows and Columns. Then, edit the Wall name.
- 2 Click **Show all receivers ID** to easily identify which display is connected to each receiver.
- 3 Set the displays' positions using receiver IDs. Select and drag a receiver to the desired position.
- 4 Click **Bezel correction** and select the unit to adjust the widths of each side of the display (i.e., top, bottom, left and right).

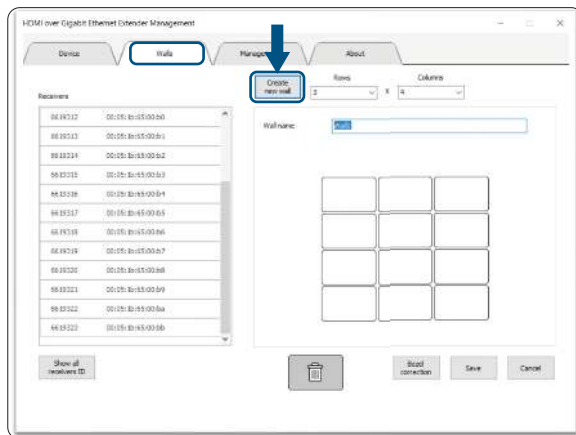




Set Display Position

Click **Show all receivers ID**. Every display screen will show the ID of its connected receiver. Refer to the receivers IDs to select and drag them to the desired positions.

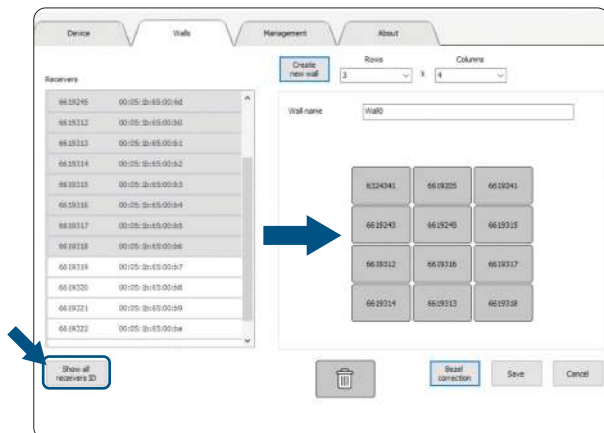

Bezel Correction



Click **Bezel correction** and select the desired unit to adjust the widths of its right, left, top and bottom sides.

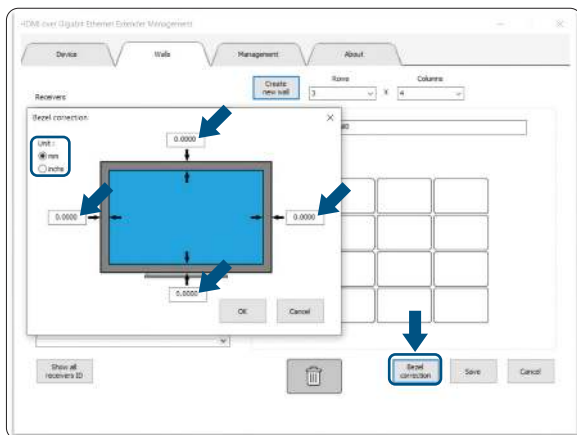




Management UI - Management

Select and drag a Transmitter to the desired wall. Click Export to save the wall configuration. To use this wall in the future, click **Import** and open the file.

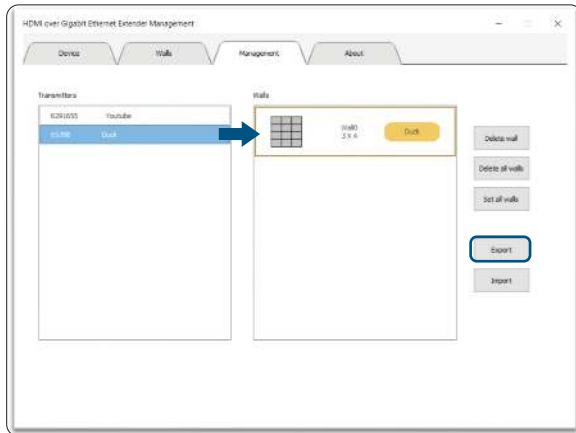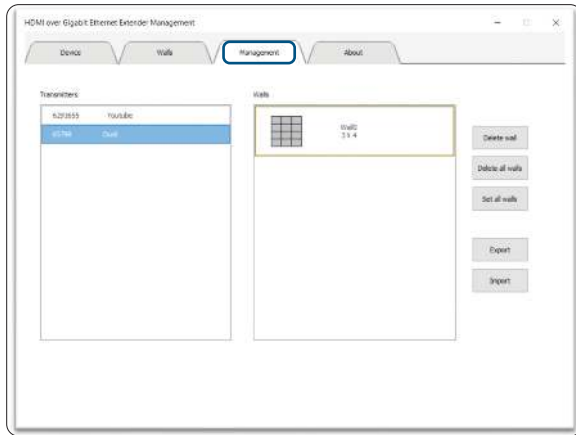

About

See the current version of software or check for new software at the link provided.

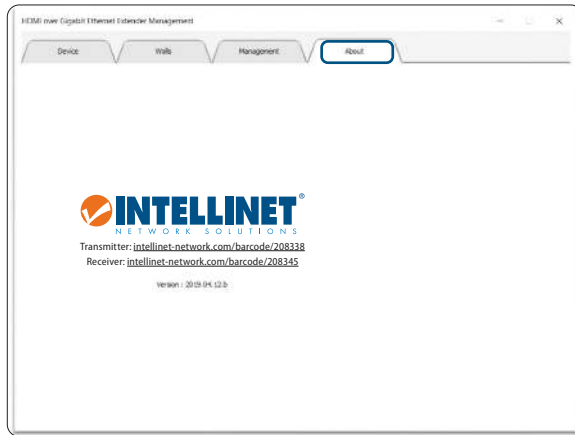

Notes



Additional Information

WASTE ELECTRICAL & ELECTRONIC EQUIPMENT DISPOSAL OF ELECTRIC AND ELECTRONIC EQUIPMENT

(Applicable In The European Union And Other European Countries With Separate Collection Systems)

ENGLISH: This symbol on the product or its packaging means that this product must not be treated as unsorted household waste. In accordance with EU Directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE), this electrical product must be disposed of in accordance with the user's local regulations for electrical or electronic waste. Please dispose of this product by returning it to your local point of sale or recycling pickup point in your municipality.

DEUTSCH: Dieses auf dem Produkt oder der Verpackung angebrachte Symbol zeigt an, dass dieses Produkt nicht mit dem Hausmüll entsorgt werden darf. In Übereinstimmung mit der Richtlinie 2012/19/EU des Europäischen Parlaments und des Rates über Elektro- und Elektronik-Altgeräte (WEEE) darf dieses Elektrogerät nicht im normalen Hausmüll oder dem Gelben Sack entsorgt werden. Wenn Sie dieses Produkt entsorgen möchten, bringen Sie es bitte zur Verkaufsstelle zurück oder zum Recycling-Sammelpunkt Ihrer Gemeinde.

ESPAÑOL: Este símbolo en el producto o su embalaje indica que el producto no debe tratarse como residuo doméstico. De conformidad con la Directiva 2012/19/EU de la UE sobre residuos de aparatos eléctricos y electrónicos (RAEE), este producto eléctrico no puede desecharse se con el resto de residuos no clasificados. Deshágase de este producto devolviéndolo a su punto de venta o a un punto de recolección municipal para su reciclaje.

FRANÇAIS: Ce symbole sur le produit ou son emballage signifie que ce produit ne doit pas être

traité comme un déchet ménager. Conformément à la Directive 2012/19/EU sur les déchets d'équipements électriques et électroniques (DEEE), ce produit électrique ne doit en aucun cas être mis au rebut sous forme de déchet municipal non trié. Veuillez vous débarrasser de ce produit en le renvoyant à son point de vente ou au point de ramassage local dans votre municipalité, à des fins de recyclage.

POLSKI: Jeśli na produkcie lub jego opakowaniu umieszczono ten symbol, wówczas w czasie utylizacji nie wolno wyrzucać tego produktu wraz z odpadami komunalnymi. Zgodnie z Dyrektywą Nr 2012/19/EU w sprawie zużytego sprzętu elektrycznego i elektronicznego (WEEE), niniejszego produktu elektrycznego nie wolno usuwać jako nie posortowanego odpadu komunalnego. Prosimy o usunięcie niniejszego produktu poprzez jego zwrot do punktu zakupu lub oddanie do miejscowego komunalnego punktu zbiórki odpadów przeznaczonych do recyklingu.

ITALIANO: Questo simbolo sul prodotto o sulla relativa confezione indica che il prodotto non va trattato come un rifiuto domestico. In ottemperanza alla Direttiva UE 2012/19/EU sui rifiuti di apparecchiature elettriche ed elettroniche (RAEE), questa prodotto elettrico non deve essere smaltito come rifiuto municipale misto. Si prega di smaltire il prodotto riportandolo al punto vendita o al punto di raccolta municipale locale per un opportuno riciclaggio.

WARRANTY INFORMATION • GARANTIEINFORMATIONEN • GARANTÍA • GARANTIE • GWARANCJI • GARANZIA

USA & CANADA: intellinetsolutions.us

DEUTSCHLAND: intellinetnetwork.de

EUROPA: intellinetnetwork.eu

ITALIA: intellinetnetwork.it

EN MÉXICO: intellinetsolutions.mx | Póliza de Garantía Intellinet — Datos del importador y responsable ante el consumidor IC Intracom México, S.A.P.I. de C.V. • Av. Interceptor Poniente # 73, Col. Parque Industrial La Joya, Cuautitlán Izcalli, Estado de México, C.P. 54730, México. • Tel. (55)1500-4500

La presente garantía cubre los siguientes productos contra cualquier defecto de fabricación en sus materiales y mano de obra.

- A** Garantizamos los productos de limpieza, aire comprimido y consumibles, por 60 días a partir de la fecha de entrega, o por el tiempo en que se agote totalmente su contenido por su propia función de uso, lo que suceda primero.
- B** Garantizamos los productos con partes móviles por 3 años.
- C** Garantizamos los demás productos por 5 años (productos sin partes móviles), bajo las siguientes condiciones:
 - 1 Todos los productos a que se refiere esta garantía, ampara su cambio físico, sin ningún cargo para el consumidor.
 - 2 El comercializador no tiene talleres de servicio, debido a que los productos que se garantizan



no cuentan con reparaciones, ni refacciones, ya que su garantía es de cambio físico.

- 3 La garantía cubre exclusivamente aquellas partes, equipos o sub-ensambles que hayan sido instaladas de fábrica y no incluye en ningún caso el equipo adicional o cualesquiera que hayan sido adicionados al mismo por el usuario o distribuidor.

Para hacer efectiva esta garantía bastará con presentar el producto al distribuidor en el domicilio donde fue adquirido o en el domicilio de IC Intracom México, S.A.P.I. de C.V., junto con los accesorios contenidos en su empaque, acompañado de su póliza debidamente llenada y sellada por la casa vendedora (indispensable el sello y fecha de compra) donde lo adquirió, o bien, la factura o ticket de compra original donde se mencione claramente el modelo, número de serie (cuando aplique) y fecha de adquisición. Esta garantía no es válida en los siguientes casos: Si el producto se hubiese utilizado en condiciones distintas a las normales; si el producto no ha sido operado conforme a los instructivos de uso; o si el producto ha sido alterado o tratado de ser reparado por el consumidor o terceras personas.

REGULATORY STATEMENTS

FCC Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of Federal Communications Commission (FCC) Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: reorient or relocate the receiving antenna; increase the separation between the equipment and the receiver; connect the equipment to an outlet on a circuit different from the receiver; or consult the dealer or an experienced radio/TV technician for help.

CE

ENGLISH: This device complies with the requirements of CE RED 2014/53/EU, 2014/30/EU and/or 2014/35/EU. The Declaration of Conformity for is available at:

DEUTSCH: Dieses Gerät entspricht der CE RED 2014/53/EU, 2014/30/EU und / oder 2014/35/EU. Die Konformitätserklärung für dieses Produkt finden Sie unter:

ESPAÑOL: Este dispositivo cumple con los requerimientos de CE RED 2014/53/EU, 2014/30/EU y / o 2014/35/EU. La declaración de conformidad esta disponible en:

FRANÇAIS: Cet appareil satisfait aux exigences de CE RED 2014/53/EU, 2014/30/EU et / ou 2014/35/EU. La Déclaration de Conformité est disponible à :

POLSKI: Urządzenie spełnia wymagania CE RED 2014/53/EU, 2014/30/EU I / lub 2014/35/EU.

Deklaracja zgodności dostępna jest na stronie internetowej producenta:

ITALIANO: Questo dispositivo è conforme alla CE RED 2014/53/EU, 2014/30/EU e / o 2014/35/EU. La dichiarazione di conformità è disponibile al:

intellinetnetwork.com



North America

IC Intracom America
550 Commerce Blvd.
Oldsmar, FL 34677, USA

Asia & Africa

IC Intracom Asia
4-F, No. 77, Sec. 1, Xintai 5th Rd.
Xizhi Dist., New Taipei City 221, Taiwan

Europe

IC Intracom Europe
Löhbacher Str. 7, D-58553
Halver, Germany

All trademarks and trade names are the property of their respective owners.

Alle Marken und Markennamen sind Eigentum Ihrer jeweiligen Inhaber.

Todas las marcas y nombres comerciales son propiedad de sus respectivos dueños.

Toutes les marques et noms commerciaux sont la propriété de leurs propriétaires respectifs.

Wszystkie znaki towarowe i nazwy handlowe należą do ich właścicieli.

Tutti i marchi registrati e le denominazioni commerciali sono di proprietà dei loro rispettivi proprietari.



intellinetnetwork.com

All trademarks and trade names are the property of their respective owners.
© IC Intracom. All rights reserved. Intellinet Network Solutions is a
trademark of IC Intracom, registered in the U.S. and other countries.