



# Installation Manual

## Option Board

*MultiSync®*

***PN-M652***

***PN-M552***

***PN-M502***

***PN-M432***

***PN-P656***

***PN-P556***

***PN-P506***

***PN-P436***

This manual describes the Option Board installation procedure for installers.

Please check the User's Manual of your monitor before installing the Option Board for additional information.


# Installing an Option Board

You can install Option Boards that are compatible with Intel® Smart Display Module Small (Intel® SDM-S) and Intel® Smart Display Module Large (Intel® SDM-L) specifications.

**TIP:** Unless your monitor is purchased as part of a special bundle package, no Option Boards will be in the box or installed in the monitor. These are optional accessories available for separate purchase. Please contact your supplier for a list of Option Boards available for your monitor.

## ■Contents to be used

Slot cover: 1 set

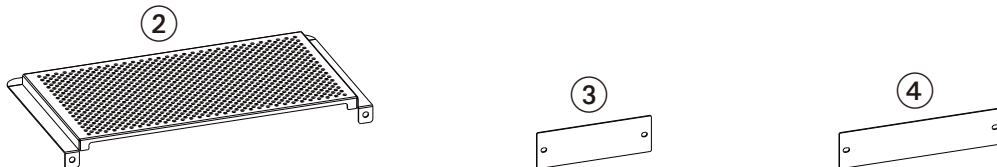

## ■Installation

1. Turn off the main power switch.
2. If signal cables or the power cord is connected to the monitor, please disconnect them.
3. Place the monitor face down on a flat even surface that is larger than the monitor screen. Use a sturdy table that can easily support the weight of the monitor.

To avoid scratching the LCD panel, always place a soft cloth, such as a blanket that is larger than the monitor's screen area, on the table before laying the monitor face down. Make sure there is nothing on the table that can damage the monitor.

4. Remove slot cover ① (Figure 1).

When install an Intel SDM-L, slide the Center rail to the right and remove it. Reverse the process to reattach it (Figure 2).

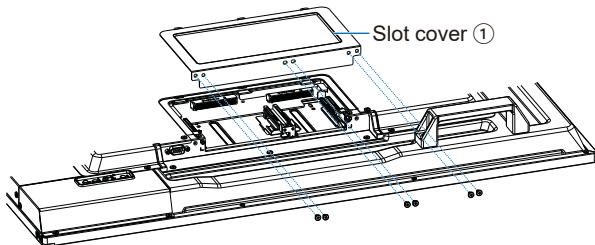


Figure 1





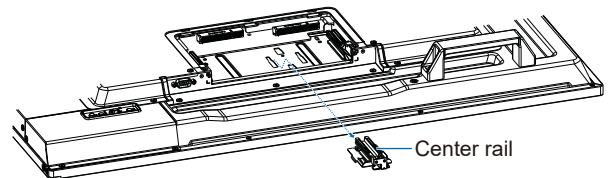


Figure 2


5. Install the slot cover ② with two removed screws used for slot cover ①.

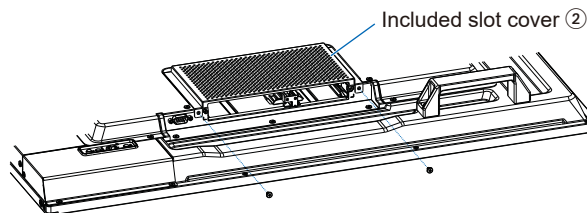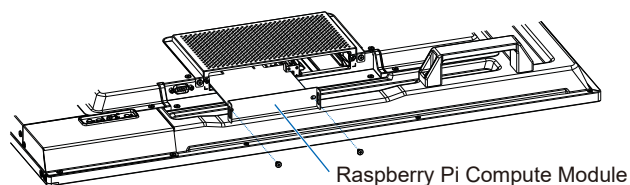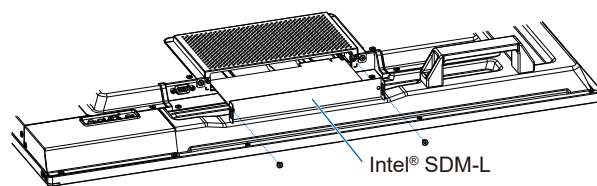

6. Insert the Option Board into the ~~monitor~~ and affix it in place with the two removed screws used for slot cover ①.  
(Recommended fasten force: 50~80 N•cm).

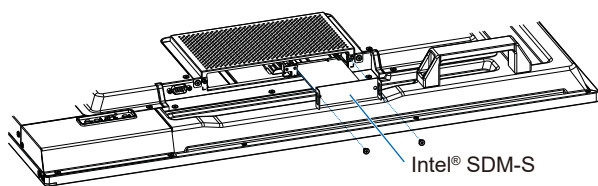

7. For slot that is not in use, install the slot cover ③ or ④ with the two removed screws used for slot cover ①.  
When installing the included slot cover, install it with the completely painted side facing out.

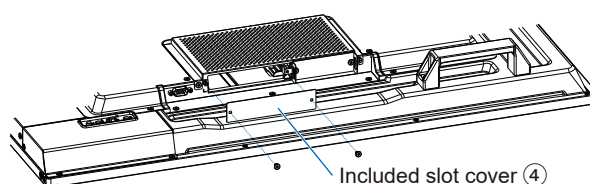

**NOTE:**

- Make sure the board is inserted into the slot in the correct orientation.
- Do not apply excessive force to manipulate the Option Board before attaching it with screws.

**⚠ WARNING:** Ensure the Option Board is securely fastened using the original screws to prevent falling out.  
A falling Option Board may expose you to danger.

MultiSync is a trademark or registered trademark of Sharp NEC Display Solutions, Ltd. in Japan and other countries.

Intel and the Intel logo are trademarks of Intel Corporation or its subsidiaries.

All other brands and product names are trademarks or registered trademarks of their respective owners.

