




Aderquerschnitt / *Wire cross section*

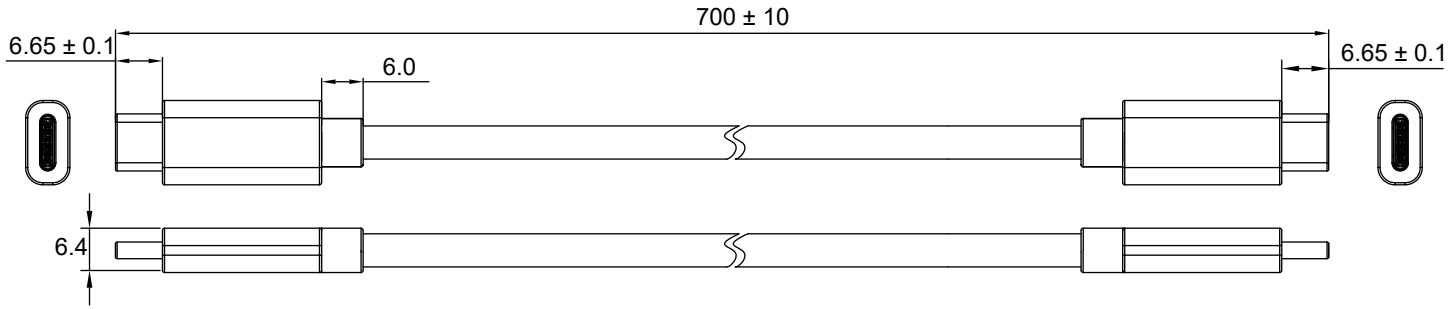

Pin-Belegung / *Pin Assignment*

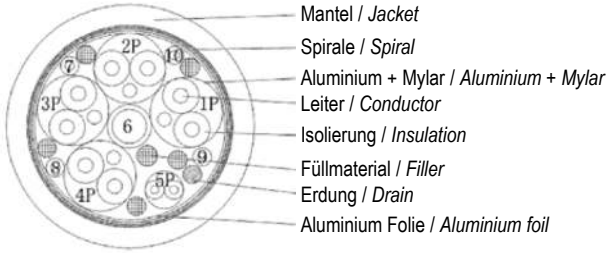

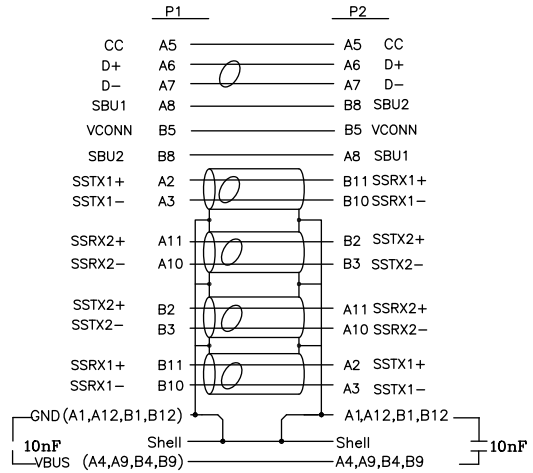

Sync & Charge USB-C™-Kabel, USB4™ Gen 3x2

- leistungsstarkes Aufladen mit bis zu 240 W bei 5 A und 48 V
- ermöglicht ultraschnelle Übertragung von großen Dateien wie Musik, Videos, Filme oder Fernsehserien mit bis zu 8K @ 60 Hz
- unterstützt die Protokolle von DisplayPort und PCI Express (PCIe)
- USB-IF-zertifiziert

Anschlüsse:	2x USB-C™-Stecker
Material:	PC, ABS, TPE
Max. Datenübertragungsrate:	40 GBit/s
Kabelaufbau:	[30 AWG (7/0.104SC) + EAM] * 4P + [34 AWG (7/0.06TC)+ AM] * 1P + 34 AWG (19/0.04TC) * 4C + 24 AWG (41/0.08TC) * 1C + EASS
Außendurchmesser Kabel:	5,2 mm
Kontaktwiderstand:	2 Ω max.
Isolationswiderstand:	300 V ⎓/10 ms; 10 MΩ min.

Sync & Charge USB-C™ Cable, USB4™ Gen 3x2

- *powerful charging with up to 240 W at 5 A and 48 V*
- *enables ultra-fast transfer of large files such as music, videos, movies or TV series at up to 8K @ 60 Hz*
- *supports DisplayPort and PCI Express (PCIe) protocols*
- *USB-IF certified*

Connectors:	*2x USB-C™ plug*
Material:	*PC, ABS, TPE*
Max. data transmission rate:	*40 GBit/s*
Cable structure:	*[30 AWG (7/0.104SC) + EAM] * 4P + [34 AWG (7/0.06TC)+ AM] * 1P + 34 AWG (19/0.04TC) * 4C + 24 AWG (41/0.08TC) * 1C + EASS*
Outer diameter cable:	*5.2 mm*
Contact resistance:	*2 Ω max.*
Insulation resistance:	*300 V ⎓/10 ms; 10 MΩ min.*

Änderungen			Datum	Name
Datum	Name	gez.:	13.02.2023	aw
		gepr.:	13.02.2023	aw
		Norm:		
		Änderungen vorbehalten / *Subject to change*		

Bezeichnung
USB 4.0 GEN 3 240W 40G C/C
0070 SCHWARZ

Zeichnungs-Nr.:
61716

Blatt
1/1
von