


## Universal TV Mounting Caddy for Media Players

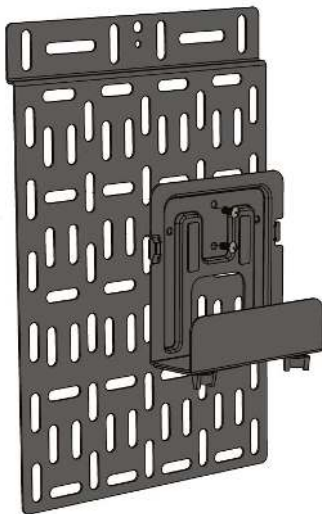

*Actual product may vary from photos*

### User Manual

SKU#: MDBOXMNT

For the latest information and specifications visit  
[www.startech.com/MDBOXMNT](http://www.startech.com/MDBOXMNT)

## **Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols**

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

## Warning Statements

- Make sure that you assemble this product according to the instructions.
- Do not exceed the weight capacity of this product. Overloading this product might result in injury or property damage. This product can support the following weight: 11 lb. (5 kg).
- This product is intended for indoor use only and should not be used outdoors.
- The mounting hardware included with this product might not be adequate for some wall structures. If you lack the necessary expertise to attach this product to the wall structure that you're using, contact a construction professional to install the wall mount or to provide specific mounting instructions for your wall structure.

## Varningsmeddelanden

- Se till att du monterar produkten i enlighet med instruktionerna.
- Överskrid inte produktens viktkapacitet. Överbelastning av produkten kan orsaka skada på person eller egendom. Denna produkt har stöd för följande vikter: 5 kg.
- Produkten är endast avsedd för användning inomhus och ska inte användas utomhus.
- Monteringsutrustningen som medföljer produkten kanske inte är lämplig för vissa väggstrukturer. Om du saknar nödvändiga kunskaper för att fästa denna produkt på väggstrukturen som du använder, kontakta en professionell konstruktör för att installera väggmonteringen eller för att ge specifika monteringsinstruktioner för din väggstruktur.

## Avertissements

- Assemblez ce produit conformément aux instructions.
- Ne dépassez pas la capacité pondérale du produit. Une surcharge du produit peut entraîner des blessures ou des dommages matériels. Ce produit peut supporter 5 kg.
- Ce produit est uniquement destiné à une utilisation en intérieur et ne doit pas être utilisé à l'extérieur.

- Le matériel de fixation inclus avec ce produit n'est pas forcément approprié pour toutes les structures de murs. Si vous ne disposez pas des compétences nécessaires pour installer ce produit au mur, contactez un professionnel afin qu'il installe le support mural ou qu'il vous fournisse les instructions de montage spécifiques à votre structure de mur.

## Warnhinweise

- Beachten Sie bei der Montage dieses Produkts die Montageanweisungen.
- Überschreiten Sie nicht die Tragkraft dieses Produkts. Ein Überladen dieses Produkts kann zu Verletzungen oder zur Beschädigung des Produkts führen. Dieses Produkt ist für folgendes Gewicht geeignet: 5 kg.
- Dieses Produkt ist nur zum Gebrauch in Innenräumen vorgesehen und sollte nicht im Freien verwendet werden.
- Das mitgelieferte Montagematerial ist möglicherweise nicht für jede Wand geeignet. Wenn Ihnen die nötigen Fachkenntnisse zum Anbringen dieses Produkts an einer Wand fehlen, lassen Sie einen Fachmann den Wandhalter anbringen, oder lassen Sie sich von einem Fachmann Montageanweisungen für Ihre Wand erteilen.

## Dichiarazioni di avvertenza

- Assicurarsi di Assemblare il prodotto secondo le istruzioni.
- Non superare la capacità di carico del prodotto. Il sovraccarico del prodotto potrebbe causare danni o lesioni. Il prodotto è in grado di supportare i seguenti pesi: 5 kg.
- Il prodotto è destinato all'uso in ambienti interni. Se ne sconsiglia l'impiego in ambienti esterni.
- L'hardware di montaggio incluso con il prodotto potrebbe non essere adeguato ad alcune strutture murarie. Se l'utente non dispone delle competenze necessarie per agganciare il prodotto alla struttura muraria in uso, dovrà contattare un professionista edile per installare il supporto a parete o ottenere istruzioni di montaggio per la struttura muraria in uso.

## Mensagens de aviso

- Certifique-se de que monta este produto de acordo com as instruções.

- Não exceda a capacidade de peso deste produto. Sobrecarregar este produto pode resultar em ferimentos ou danos de propriedade. Este produto pode suportar o seguinte peso: 5 kg.
- Este produto destina-se apenas a uma utilização no interior e não deve ser utilizado no exterior.
- O hardware de montagem incluído com este produto pode não ser adequado para algumas estruturas de parede. Se não tiver o conhecimento necessário para fixar este produto à estrutura de parede que está a usar, contacte um profissional de construção para fazer a instalação em parede ou para fornecer instruções de montagem específicas para a sua estrutura de parede.

## Advertencias de uso

- Asegúrese de ensamblar este producto según las instrucciones.
- Asegúrese de no exceder la capacidad de peso de este producto. La sobrecarga de este producto puede causar lesiones personales o daños en la propiedad. Este producto tiene capacidad para el siguiente peso: 5 kg.
- El uso de este producto es solo para interiores y no debe utilizarse en exteriores.
- El hardware de montaje incluido con este producto puede no ser adecuado para algunas estructuras de pared. Si no tiene la experiencia suficiente para fijar este producto a la estructura de la pared correspondiente, póngase en contacto con un profesional de la construcción para instalar el soporte de pared o para que le proporcione las instrucciones específicas de montaje para su estructura de pared.

## Waarschuwingen

- Zorg dat u dit product volgens de instructies in elkaar zet.
- Overschrijd de maximale capaciteit van dit product niet. Overbelasting van dit product kan letsel of materiële schade veroorzaken. Dit product ondersteunt het volgende gewicht: 5 kg.
- Dit product is alleen bedoeld voor binnengebruik en mag niet buiten worden gebruikt.
- Das mitgelieferte Montagmaterial ist möglicherweise nicht für jede Wand geeignet. Wenn Ihnen die nötigen Fachkenntnisse zum Anbringen dieses Produkts an einer Wand fehlen, lassen Sie einen Fachmann den Wandhalter anbringen, oder lassen Sie sich von einem Fachmann Montageanweisungen für Ihre Wand erteilen.

## 注意

- 必ず取扱説明書に従って本製品の組み立てを行って下さい。
- 本製品で定められた最大積載重量を超えないようにして下さい。最大積載重量をオーバーした場合、怪我をする恐れや器物破損の恐れがあります。本製品は、モニター1台あたり5kgまで支持できます。
- 本製品は、室内での使用を想定しています。戸外では使用しないで下さい。
- 壁の構造はお客様の環境ごとに異なります。ご使用になる壁の構造タイプと取付け金具が、取り付けモニターを確実に支持することを確認して下さい。確認を怠った場合、傷害を負う恐れや物的損害が発生する恐れがあります。壁の構造が、取り付けのモニター重量の最低4倍まで支持できるだけの強度を持っていないかもしれません。

# Safety Statements

## Safety Measures

- Cables (including power and charging cables) should be placed and routed to avoid creating electric, tripping or safety hazards.

## Mesures de sécurité

- Les câbles (y compris les câbles d'alimentation et de chargement) doivent être placés et acheminés de façon à éviter tout risque électrique, de chute ou de sécurité

## 安全対策

- ケーブル(電源ケーブルと充電ケーブルを含む)は、適切な配置と引き回しを行い、電気障害やつまづきの危険性など、安全上のリスクを回避するようにしてください。

## Misure di sicurezza

- I cavi (inclusi i cavi di alimentazione e di ricarica) devono essere posizionati e stesi in modo da evitare pericoli di inciampo, rischi di scosse elettriche o pericoli per la sicurezza.


## Säkerhetsåtgärder

- Kablar (inklusive elkablar och laddningskablar) ska dras och placeras på så sätt att risk för snubblingsolyckor och andra olyckor kan undvikas.

# Table of Contents

|                                                                        |    |
|------------------------------------------------------------------------|----|
| Warning Statements .....                                               | 2  |
| Safety Statements .....                                                | 6  |
| Product Diagram .....                                                  | 8  |
| Product Dimension .....                                                | 10 |
| Product Information .....                                              | 11 |
| Package Contents .....                                                 | 11 |
| Specifications.....                                                    | 13 |
| Requirements .....                                                     | 14 |
| Using the Reusable Tie Straps to Mount a Media Device.....             | 14 |
| Removing the Reusable Tie Straps .....                                 | 16 |
| Using the Media Device Mounting Assembly to Mount a Media Device ..... | 17 |
| Wall Mounting the Mounting Caddy .....                                 | 19 |
| Mounting the Mounting Caddy to a TV or Monitor .....                   | 20 |
| Mounting the Mounting Caddy to a Display Mount .....                   | 21 |

## Product Diagram

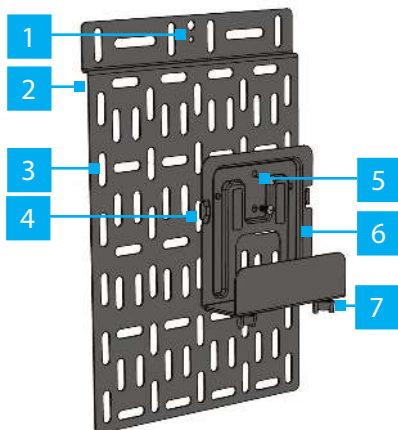


|   | Component              | Function                                                                                                                                                                                                           |
|---|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Bracket Mounting Holes | <ul style="list-style-type: none"> <li>Used to secure the <b>Mounting Bracket</b> to a wall, TV mount, TV, or monitor.</li> </ul> <p><b>Note</b> Screws used for mounting will depend on the mounting surface.</p> |
| 2 | Mounting Bracket       | <ul style="list-style-type: none"> <li>Used to mount a <b>Media Device</b> to a wall, TV mount, TV, or monitor.</li> <li>Maximum weight capacity = 11 lb. (5 kg).</li> </ul>                                       |

|   |                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3 | Media Device Mounting Holes                   | <ul style="list-style-type: none"> <li>• Used with the <b>Media Device Mounting Assembly</b> to secure a <b>Media Device</b> to the <b>Mounting Bracket</b>.</li> <li>• - or -</li> <li>• Used with the <b>Reusable Tie Straps</b> (included) to secure the <b>Media Device</b> to the <b>Mounting Bracket</b>.</li> <li>• The <b>Media Device Mounting Holes</b> provide a variety of mounting options.</li> <li>• Slot spacing supports screw attachment to a 200 x 200 VESA mount.</li> </ul> |
| 4 | Hooks                                         | <ul style="list-style-type: none"> <li>• Used to hold the <b>Elastic Band</b> in place securing a <b>Media Device</b>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                |
| 5 | Media Device Mounting Assembly Mounting Holes | <ul style="list-style-type: none"> <li>• Used to mount the <b>Media Device Mounting Assembly</b> to the <b>Mounting Bracket</b>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                      |
| 6 | Media Device Mounting Assembly                | <ul style="list-style-type: none"> <li>• Used to secure a <b>Media Device</b> to the <b>Mounting Bracket</b>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                         |


- |                              |                                                                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>7</b> Thumb Screws</p> | <ul style="list-style-type: none"> <li>Used to adjust the width (thickness) of the <b>Media Device Mounting Assembly</b>.</li> <li>Adjustable bracket accommodates <b>Media Devices</b> from Min. 47 mm (1.8") - Max. 76 mm (2.9").</li> </ul> |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Product Dimension

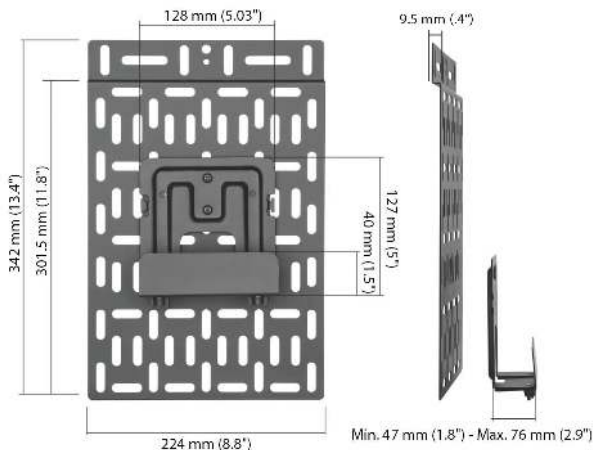

## Product Information

### Package Contents



Mounting Bracket

Qty: 1



Reusable Tie Straps 600 mm  
(23.6")

Qty: 3



Media Device Mounting  
Assembly

Qty: 1



Elastic Band

Qty: 1



Nuts

Qty: 2



12 mm Washers

Qty: 2



20 mm Washers

Qty: 2



M5 x 10 mm Screws

Qty: 2



M4 x 14 mm Screws

Qty: 2



M6 x 14 mm Screws

Qty: 2



M8 x 15 mm Screws

Qty: 2




Wall Screws

Qty: 2



Wall Anchors

Qty: 2



EVA Foam Strip

Qty: 6

## Specifications

| Type of Measurement                                                                                  | Measurement   |
|------------------------------------------------------------------------------------------------------|---------------|
| <br>Weight Capacity | 11 lb. (5 kg) |


## Requirements

For the latest requirements, please visit [www.startech.com/MDBOXMNT](http://www.startech.com/MDBOXMNT)

- Phillips® Head Screwdriver x 1
- 8 mm Wrench or Pliers x 1


## Using the Reusable Tie Straps to Mount a Media Device

1. Position a **Media Device** on the **Mounting Bracket**, making sure that there are two accessible holes above and below the Media Device for (horizontal) mounting.
2. While holding one end of the **Reusable Tie Strap** (square connector end), thread the other end through one of the top **Media Device Mounting Holes**.




Reusable Tie Strap Square Connector

3. Pull the end of the **Reusable Tie Strap** through the **Media Device Mounting Hole**, wrapping it around the back of the **Mounting Bracket**, downward toward the **Media Device Mounting Hole**.
4. Thread the end of the **Reusable Tie Strap** through the bottom **Media Device Mounting Hole**, pulling it up toward the opposite end of the **Reusable Tie Strap** (square connector).
5. Thread the end of the **Reusable Tie Strap** through the side of the square connector, which is opposite to the **Release Tab** on the other end of the **Reusable Tie Strap** and pull it tightly around the **Media Device**.



Reusable Tie Strap Square Connector

6. (Optional) Repeat steps 2 - 5 to install the remaining **Reusable Tie Strap**, securing the **Media Device** to the **Mounting Bracket**.

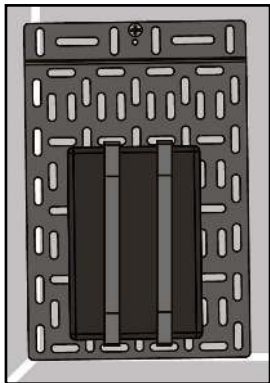

Mounting a Media Device Using the Reusable Tie Straps


## Removing the Reusable Tie Straps

1. Remove the **Mounting Caddy** from the mounting surface and lay it on a flat surface, with the **Media Device** facing upward.
2. Press down on the **Release Tab** located beside the square connector on the **Reusable Tie Strap**. Pull the end of the **Reusable Tie Strap** back through the square connector, disengaging it from the locking mechanism on the square connector.

3. (Optional) Repeat step 2 to remove the remaining **Reusable Tie Straps**.

## Using the Media Device Mounting Assembly to Mount a Media Device


1. Position the **Media Device Mounting Assembly** on the **Mounting Bracket**.
2. Insert one **M5 x 10 mm Screw** through the **Media Device Mounting Assembly Mounting Hole** and the **Media Device Mounting Hole** on the **Mounting Bracket**.
3. Thread a **20 mm Washer** and **Nut** onto the back of the **M5 x 10 mm Screw**.

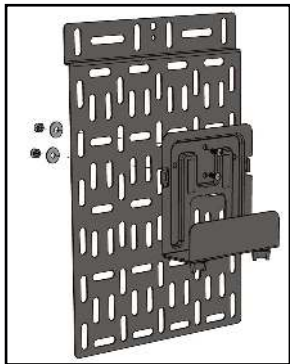

Installing the Media Device Mounting Assembly

4. Using an **8 mm Wrench** or **Pliers** (not included), hold the **Nut** and tighten the **M5 x 10 mm Screw** using the **Phillips Head Screwdriver**, being careful not to over-tighten.
5. To install the second **M5 x 10 mm Screw**, repeat steps 2 - 4.
6. (Optional) Remove the adhesive backing on the **EVA Form Strips** and attach them to the inside of the **Adjustable Clamp**, on the **Media Device Mounting Assembly**, to protect and secure the **Media Device** in place.
7. Insert a **Media Device** into the **Media Device Mounting Assembly**.
8. Using the two **Thumb Screws** on the bottom of the **Media Device Mounting Assembly**, adjust the thickness, Min. 47 mm (1.8") - Max. 76 mm (2.9"), to accommodate the size of the **Media Device** and secure it in place.
9. Wrap the **Elastic Band** around one of the **Hooks** on the side of the **Media Device Mounting Assembly**.
10. Pull the **Elastic Band** over-top of the **Media Device** and connect the other end to the opposite **Hook** on the **Media Device Mounting Assembly**.

**Note:** Depending on the size of the **Media Device** you are trying to mount, the **Elastic Band** may not be able to properly secure the **Media Device** in place. If this occurs, try using the **Reusable Tie Straps** to secure the **Media Device** in place.

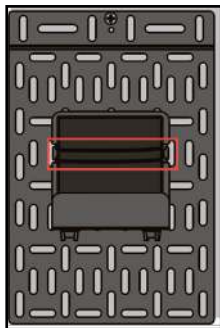

Securing the Elastic Band

## Wall Mounting the Mounting Caddy

The **Mounting Caddy** can be mounted using the **Mounting Hardware (Wall Screws and Wall Anchors)** included.


- Product mounting should be completed by a certified professional, as per the local safety and building code guidelines.
- Wall structures vary it is important to make sure that the type of structure and mounting hardware that you are using will properly support the mounted equipment. Failure to do so may result in personal injury and/or equipment damage.

## Mounting the Mounting Caddy to a TV or Monitor

When mounting the **Mounting Caddy** to the back of a **Display**, the **Mounting Caddy** must be mounted vertically with the **Bracket Mounting Hole** at the top.

1. Align one of the **Bracket Mounting Holes** on the **Mounting Bracket** (depending on the size of the **Screw**) with a **VESA Mounting Hole** on the back of a **Display**.
2. Insert one of the provided **Screws** (M4 x 14 mm, M6 x 14 mm, or M8 x 15 mm) through the **Bracket Mounting Hole** and into the **VESA Mounting Hole** on the **Display**.
3. (Optional) If the **Display** has a 200 mm x 200 mm VESA mounting pattern, you can secure the **Mounting Bracket** by inserting two of the provided **Screws** (M4 x 14 mm, M6 x 14 mm, or M8 x 15 mm) through the **Media Device Mounting Holes** and into the **VESA Mounting Holes** on the back of the **Display**.
4. Using a **Phillips Head Screwdriver**, tighten the **Screw(s)**, being careful not to over-tighten.

**Warning!** Do not over-tighten the **Screw(s)**. If you encounter any unexpected resistance as you are fastening the **Screw(s)**, immediately stop and attempt to use a different length of **Screw**.

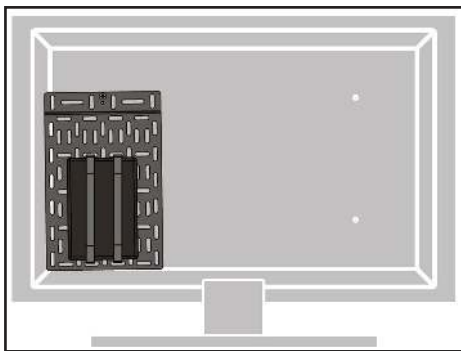


Mounting the Mounting Caddy to a Display

## Mounting the Mounting Caddy to a Display Mount

Depending on the design and/or configuration of the **Display** and the **Display Mount**, the **Mounting Caddy** can be mounted in-between the **Display Mount** and the back of a **Display** using one of the **VESA Mounting Holes**.

**Note:** This mounting configuration requires the **Mounting Caddy** to be assembled at the time you are attaching a **Display Mount** to your **Display** and may not work for your setup. Assess the safety and feasibility of this mounting option before attempting and follow the instructions and all safety guidelines provided with your **Display Mount**. If you encounter any problems while mounting the **Mounting Caddy** to a **Display Mount**, try using one of the alternate mounting methods above.


1. When attaching the **Display Mount** to the **Display**, position the **Mounting Caddy** between the **Display Mount** and the back of the **Display**, aligning one of the **Bracket Mounting Holes** with a **VESA Mounting Hole** on the back of the **Display**.

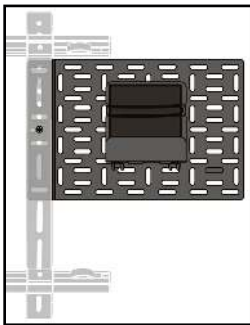

Mounting Caddy to a Display Mount

2. Insert one of the provided **Screws** (M4 x 14 mm, M6 x 14 mm, or M8 x 15 mm), if suitable, through the **Mounting Hole** on the **Display Mount** and the **Mounting Caddy's Screw Hole** and into a **VESA Mounting Hole** on the **Display**.
3. Using a **Phillips Head Screwdriver**, tighten the **Screw**, being careful not to over-tighten.

**Warning!** Do not over-tighten the **Screw**. If you encounter any unexpected resistance as you are fastening the **Screw**, immediately stop and attempt to use a different length of **Screw**.

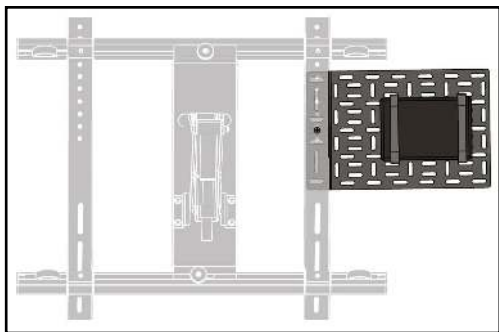

Mounting the Mounting Caddy to a Display Mount

## Warranty Information

This product is backed by a five-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product.

Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit [www.startech.com](http://www.startech.com) for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

### Reviews

Share your experiences using StarTech.com products, including product applications and setup, what you love about the products, and areas for improvement.

#### StarTech.com Ltd.

45 Artisans Cres.  
London, Ontario  
N5V 5E9  
Canada

#### StarTech.com LLP

4490 South Hamilton  
Road  
Groveport, Ohio  
43125  
U.S.A.

#### StarTech.com Ltd.

Unit B, Pinnacle  
15 Gowerton Rd.,  
Brackmills  
Northampton  
NN4 7BW  
United Kingdom

FR: [startech.com/fr](http://startech.com/fr)

DE: [startech.com/de](http://startech.com/de)

ES: [startech.com/es](http://startech.com/es)

NL: [startech.com/nl](http://startech.com/nl)

IT: [startech.com/it](http://startech.com/it)

JP: [startech.com/jp](http://startech.com/jp)