logitech

DATASHEET

RALLY BAR HUDDLE

VIDEO ENABLE HUDDLE AND SMALL ROOMS. ALL-IN-ONE VIDEO CONFERENCING AT THE TOUCH OF A BUTTON.

ALL-IN-ONE VIDEO BAR FOR HUDDLE AND SMALL ROOMS

Designed to deliver video meetings with ease, Rally Bar Huddle is quick to set up in person or remotely, simple to manage, and easy to integrate with your existing video conferencing solutions through CollabOS.

Rally Bar Huddle works with most platforms you use to connect hybrid teams, ensuring an effortless experience from the home to the office, and everywhere in between.

Combine Rally Bar Huddle with Tap IP and Tap Scheduler to make it easy to schedule, join, and participate in video meetings.

EVERYONE IS SEEN AND HEARD CLEARLY

AI video intelligence, advanced sound pickup, noise suppression, and ongoing software improvements provide a clear and natural meeting experience for remote workers.

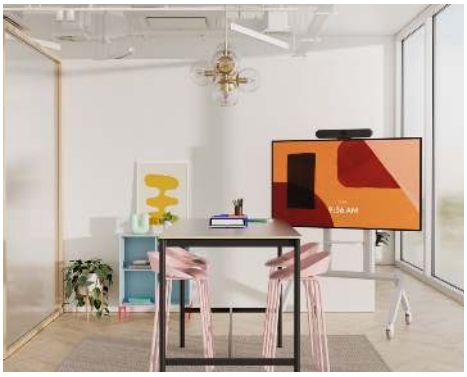

WORKS WITH LEADING VIDEO PLATFORMS

Rally Bar Huddle works with most platforms you use to connect hybrid teams, ensuring an effortless experience from the home to the office, and everywhere in between.

Microsoft zoom Google Meet

QUICK TO SET UP, EASY TO MANAGE

Designed to deliver video meetings with ease, Rally Bar Huddle is quick to set up, simple to manage, and easy to integrate with Tap IP through CollabOS. Plus, use the included Multi Mount to mount Rally Bar Huddle one of three ways; on the wall, on the table, or above the display.

Plus, use Rally Bar Huddle as a meeting room appliance, in USB mode connected to a meeting room PC, or connect via laptop.

PC

APPLIANCE

BYOD

PRODUCT SPECS & DETAILS

DIMENSIONS

Width: 549.6 mm (21.6 in)
Height: 78.9 mm (3.1 in)
Depth: 76.0 mm (3.0 in)
Weight: 3.9 lbs (1.8 kg)

SYSTEM REQUIREMENTS

Internet Connection: Wired or wireless

USB Mode: Windows® 11, Windows 10, the two most recent versions of macOS

Appliance Mode: Room solution software license (not included)

PACKAGE CONTENTS

Rally Bar Huddle
Multi-Mount
Power supply
AC power cord
HDMI cable
USB cable

WARRANTY INFORMATION

Standard: 2-year limited hardware warranty included.

Extended: Additional one-year and three-year extended warranties available at the time of hardware purchase.

Contact your reseller for availability.

TECHNICAL SPECIFICATIONS

Certifications and Compatibility:

For the latest information on certification and compatibility, see prosupport.logi.com/hc/en-us/articles/1500001344641.

General Specifications:

Built-in Components: 6 DMIC microphone array, digital PTZ camera, 1 full range ported speaker, cable management & retention system, Multi Mount, integrated motorized privacy shutter, Logitech CollabOS platform

Enclosure: All-in-one enclosure with field replaceable front cover

Device Management: Logitech Sync

Displays Supported: 1 (2nd display support is coming soon)

Display Resolution: 1080p

Network Protocol Support: IPv4, IPv6

Proxy Support: IP based Proxy, FQDN based Proxy, Proxy using PAC file

Camera:

Digital Pan: ±48° at 4x zoom

Digital Tilt: ±32° at 4x zoom

Zoom: 4X HD digital zoom

Diagonal Field of View: 120°

Horizontal Field of View: 113°

Vertical Field of View: 80°

Resolution: 4k

Speakers:

Driver: 55 mm with bass reflex enclosure and patented suspension design

Sensitivity: 83 dB SPL @1W +/-2dB @ 1 meter

Rated Power: 8W

THD at 1W, 1kHz: <2%

Speaker Sampling Rate: 48KHz

Impedance: 4 Ohms

Microphones:

Frequency Response: 90Hz – 16kHz

Sensitivity: -36dBFS +/-1 dB @ 1Pa

Microphone data rate output: 48 kHz

Pickup Range: Up to 23 ft (7m)

Beamforming Elements: Six omnidirectional digital MEMS microphones forming five adaptive acoustic broadside beams

Audio processing: AEC (Acoustic Echo Cancellation), VAD (Voice Activity Detector)

Noise suppression: AI based de-noising algorithm

Interfaces:

HDMI Out: 1

HDMI In: 1

USB: 1x Type A USB 3.1, 1x Type C USB 3.1

Network: 10/100/1G Ethernet

WiFi: 802.11a/b/g/n/ac

Bluetooth: Bluetooth® Low Energy

Power and Cables:

Power supply: Auto-sensing

Operating Voltage/Power: 100-240V, 19V, 2.1A

Power Supply Dimensions: 4.48 in (114 mm) x 1.85 in (47 mm) x 1.27 in (32.3 mm)

DC Cable: 5 ft (1.5 m)

AC Cable: 4.9 ft (1 m)

HDMI 1.4 Cable: 6.5 ft (2 m)

USB A to USB C 3.0 Cable: 7.2 ft (2.2 m)

Environmental:

Operating Temperature: 0 to 40°C

Storage Temperature: -25 to 70°C

Humidity: 10 to 90%

Security:

File Based Encryption: AES-128

Data Encryption: Symmetric Keys, PKI

Device Identity: Protected by device attestation

Device Access: Authenticated using API

Key Protection: Arm TrustZone, RPMP

Accessories:

Covers: Rally Bar Huddle Front Cover-Cleanable, Off-White Fabric

Mounts: Wall Mount for Video Bars, TV Mount for Video Bars

Touch Controller: Logitech Tap (coming soon) and Tap IP

PART NUMBER

960-001485

logitech®

logitech.com/rallybarhuddle

Contact your reseller or contact us at logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2023 Logitech. Logitech, Logi, Rally Bar Huddle, Sync and their logos are trademarks or registered trademarks of Logitech Europe S.A. and/or its affiliates in the U.S. and other countries.

Microsoft and *Windows* are trademarks of the Microsoft Corporation. *Zoom* is a trademark of Zoom Video Communications, Inc. *Google Meet* is a trademark of Google LLC. *macOS* is a trademark of Apple Inc. *USB-C* is a trademark of USB Implementers Forum. All other third party trademarks are the property of their respective owners.

Published June 2023