


acar S8 FA RACK

Surge protective power strip
+ EMI/RFI filter
+ rack mount brackets

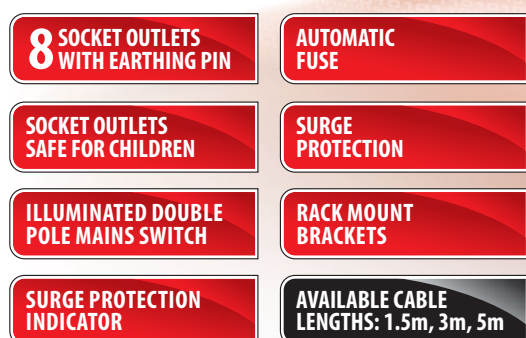


acar S8 FA RACK is a professional device in a family of products **acar S8**, intended for installation in 19-inch rack cabinets. It features eight surge protected and earthed socket outlets, which in most cases is sufficient to power all the devices mounted in a 19-inch rack cabinet. The applied high-frequency interference suppression filter increases significantly the security of the connected devices and the automatic fuse can quickly restore the system to work. The device also has an indicator of proper operation of the surge protection. Durable, rigid and self-extinguishing plastic housing meets all requirements for devices for professional use.

Technical data: acar S8 FA RACK

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	ΣI _N = 10A MAX
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _p	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20μs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20μs (type 2)
Fuses	1 automatic fuse, slow blow 10A/250V
RFI/EMI attenuation	≤35dB
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	8 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.73kg

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress.
ATTENTION! The technical data define the maximum values of surges against which the device protects.

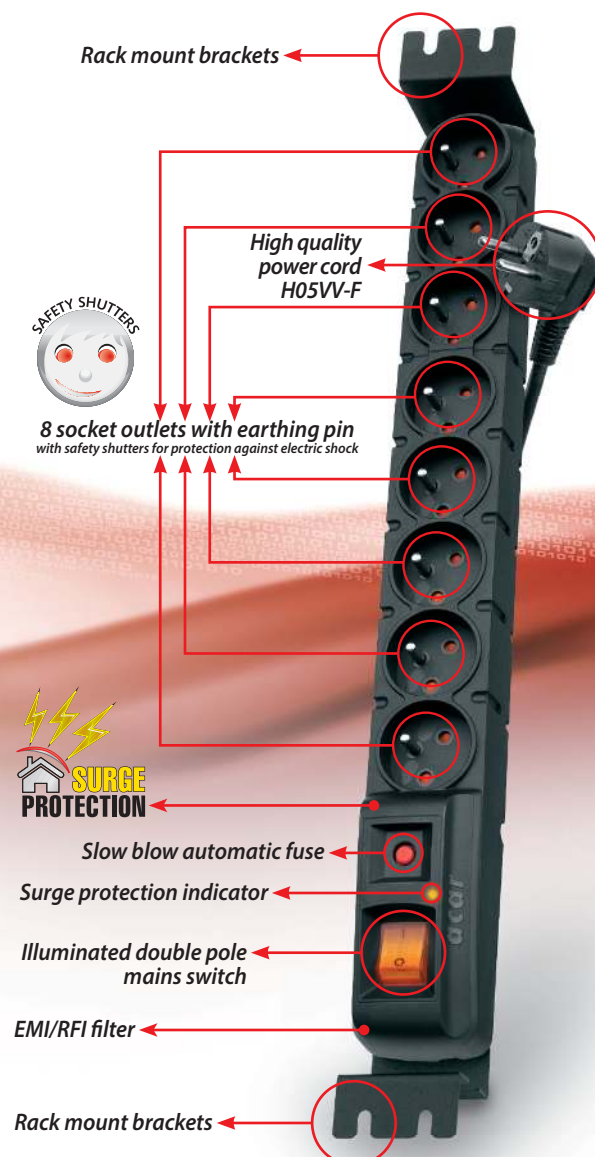

ILLUMINATED DOUBLE POLE MAINS SWITCH, SLOW-BLOW AUTOMATIC FUSE, SURGE PROTECTION INDICATOR



8 SOCKET OUTLETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS



RACK MOUNT BRACKETS