
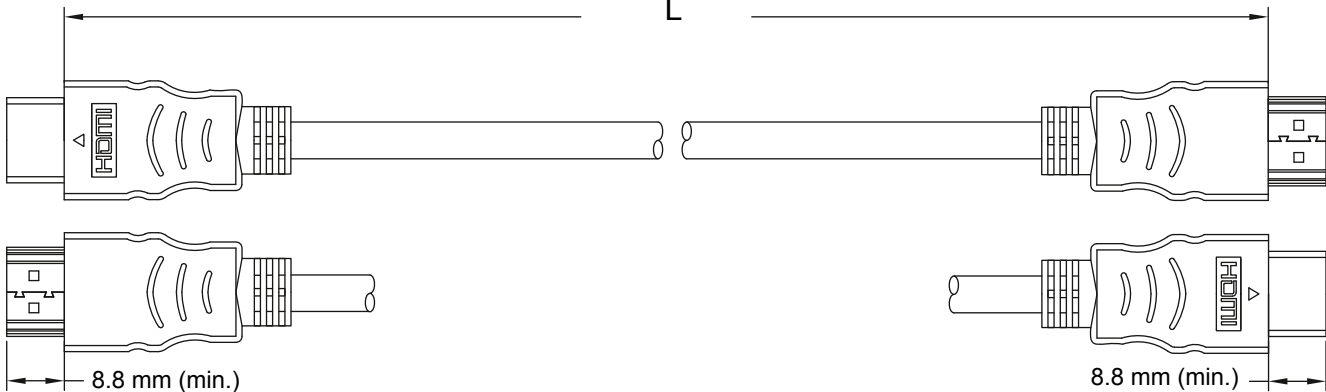



		1	2	3	4	5	6	7	8	9	10	11	12	13	14				
A	Pin-Belegung / Pin Assignment		Art.-Nr. / Item No.		Beschreibung / Description		Länge / Length (L)		AD / OD		Innenleiter Material / Material inner conductor						A		
	P1		P2		41081		HDMI 2.1 Kabel 0050 0,5m STD sw		500 ± 20 mm		6.0 ± 0.15 mm		(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)						
	1		1		41082		HDMI 2.1 Kabel 0100 1,0m STD sw		1000 ± 30 mm		6.0 ± 0.15 mm		(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)						
B	3		3		41083		HDMI 2.1 Kabel 0150 1,5m STD sw		1500 ± 50 mm		6.0 ± 0.15 mm		(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)						
	2		2		41084		HDMI 2.1 Kabel 0200 2,0m STD sw		2000 ± 50 mm		6.0 ± 0.15 mm		(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)						
	4		4		47575		HDMI 2.1 Kabel 0300 3,0m STD sw		3000 ± 50 mm		7.3 ± 0.15 mm		(7/0.12BC x 1P + 1/0.25TC + AM + M) x 5 PCS + 7/0.12BC x 4C + AM 1/0.25TC + 128/0.12ALM						
	6		6		52766		HDMI 2.1 Kabel 0500 5,0m STD sw		5000 ± 70 mm		7.8 ± 0.2 mm		(1/0.40 x 1P + D (1/0.32) + AM +HM) x 5 PCS + 1/0.40 x 4C + AM + D (1/0.40) + B (128/0.12ALM)						
	5		5																
C	7		7																
	9		9																
	8		8																
D	10		10																
	12		12																
	11		11																
	13		13																
	15		15																
	16		16																
E	14		14																
	19		19																
	17		17																
	18		18																
F	SHELL DRAIN SHELL																		
G																			
H																			
I																			
J																			

P1		L										P2	
													
		8.8 mm (min.)										8.8 mm (min.)	

Ultra High Speed HDMI™ Kabel				Ultra High Speed HDMI™ Cable			
- max. Datenrate 48 Gbit/s				- max. Data rate 48 Gbit/s			
- Hochgeschwindigkeitskabel für 8K @ 60 Hz				- High speed cable for 8K @ 60 Hz			
- Anschlüsse:		2x HDMI™-Stecker (Typ A)		- Connectors:		2x HDMI™ plug (Type A)	
- Kontakte:		vergoldet		- Contacts:		gold-plated	
- Anzahl Schirmungen:		2 (Aluminiumgeflecht 144x)		- Number of shieldings:		2 (aluminum braiding 144x)	
- Material Gehäuse:		PVC		- Material housing:		PVC	
- Material Kabelmantel:		PVC		- Material cable jacket:		PVC	
- Isolationswiderstand:		10 MΩ min.		- Insulation resistance:		10 MΩ min.	
- Kontaktwiderstand:		5 Ω max.		- Contact resistance:		5 Ω max.	
- Max. Auflösung:		4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)		- Max. Resolution:		4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)	
- Unterstützte Standards:		HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC)		- Supported standards:		HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC)	
- Konformität:		RoHS		- Conformity:		RoHS	

Änderungen		Datum		Name		Bezeichnung		Blatt			
Datum		Name		gez.: 01.02.2021		aw		HDMI 2.1 Kabel XXXX Xm STD sw 		1/1	
				gepr.: 01.02.2021		aw					
				Norm:				Zeichnungs-Nr.:		von	
				Änderungen vorbehalten / Subject to change							