


Alphacool Core Thermal Pad Soft 6.2W/mk 100x100x3mm

Alphacool article number: 13406

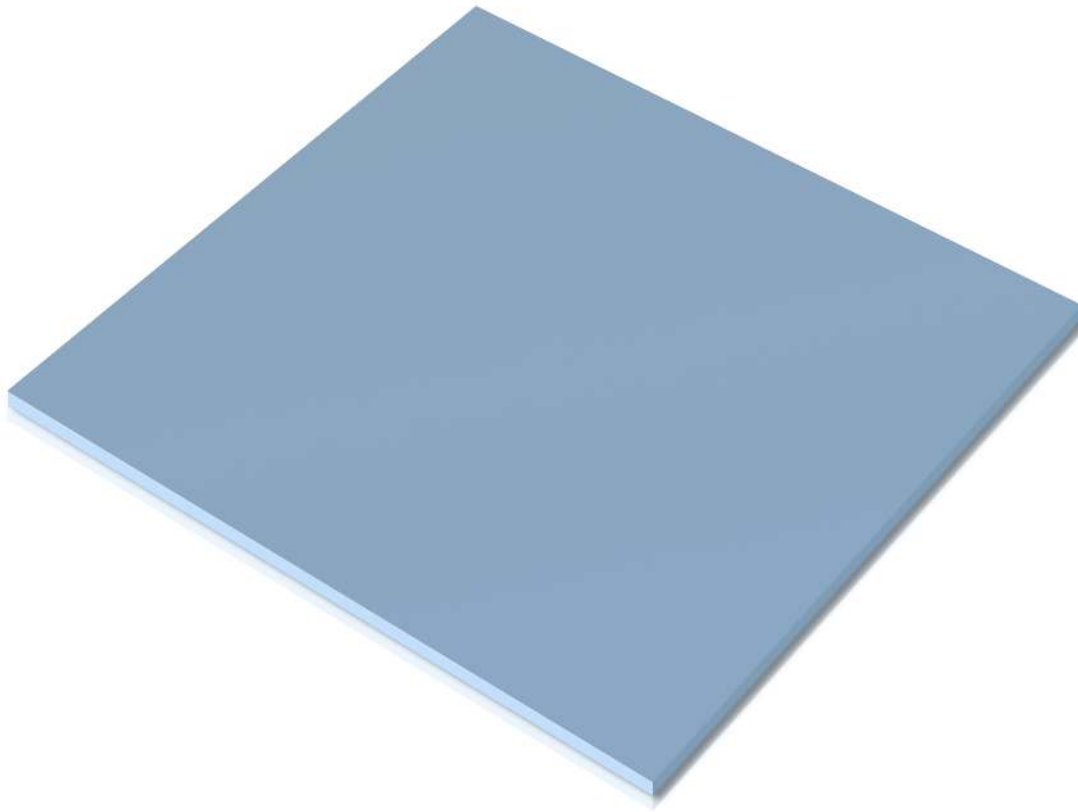

Quick Info

Alphacool's performance thermal pad can be used to cool electronic components of all kinds where it is essential to effectively dissipate waste heat. In addition to voltage converters and VRAMs on graphics cards, electronic components of Playstation and Xbox game consoles can also be cooled, greatly improving their performance and durability.

- High thermal conductivity
- Low thermal resistance
- High compressibility and compliancy
- Natural tack
- Good electrical insulation

Scope of delivery

1x Core Thermal Pad Soft 6.2W/mk 100x100x3mm

Technical data thermal pad

Dimensions (L x W x H)	100 x 100 x 3mm
Thermal Conductivity (ASTM D5470)	6.2 W/mK ($\pm 10\%$)
Hardness (ASTM D412)	50 (Shore 00) (± 15)
Working temperature	-50 to $\sim 150^{\circ}\text{C}$
Volume Resistance (ASTM D257)	1×10^{13} Ohm-m
Dielectric Breakdown Voltage (ASTM D149)	6 KV/mm ($\pm 10\%$)
Density (ASTM D792)	3.1 g/cm ³ ($\pm 10\%$)
Elongation (ASTM D412)	50%
Weight Loss (ASTM E595)	less than 1%
Flame Rating (UL 94)	V-0
Color	blue

Download links

Safety data sheet	13406_Alphacool_Core_Thermal_Pad_Soft_6.2W-mk_100x100x3mm_SDS.pdf
Product pictures	13406_Alphacool_Core_Thermal_Pad_Soft_6.2W-mk_100x100x3mm_pics.zip

Packaging dimensions per unit

L x W x H	130 x 130 x 4 mm
Weight	108 g

Other data

Certificates	CE, FC, RoHS
EAN	4250197134064
Customs code	84733080000

Article text

Alphacool's performance thermal pad can be used to cool electronic components of all kinds where it is essential to effectively dissipate waste heat. In addition to voltage converters and VRAMs on graphics cards, electronic components of Playstation and Xbox game consoles can also be cooled, greatly improving their performance and durability.

Better than standard thermal pads?

The silicone-based Soft heat conduction pad is characterized by optimal compressibility. Due to its low hardness and a natural stickiness, the Core thermal pad adapts perfectly to surfaces, compensates for unevenness between components and thus ensures a significant improvement in heat transfer.


Increased service life!

The special material composition of the Core thermal pad reduces the risk of silicone bleeding. It can be used for a substantially longer period of time than conventional heat conduction pads without significantly losing performance.

Versatile use!

Due to its excellent electrical insulation (electrically non-conductive), Alphacool's thermal pad can also be used to cool electronic components in electric vehicles, autopilot systems, cell phones, servers, motherboards, power supplies, LCD TVs, notebooks, telecommunication devices, access points, memory modules, etc.

Thermal Resistance vs. Pressure vs. Deflection

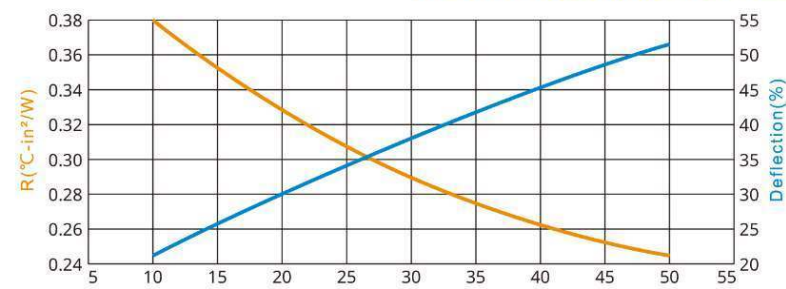

Pressure(psi)	R(°C-in²/W)	Deflection(%)
10	0.380	21
30	0.290	38
50	0.245	52

Thermal Conductivity : 6.2 W/mK

Hardness : 50 (Shore 00)

