


ROLINE LineSecure III 2000R - Line Interactive UPS, Rack Version

Product No.	19.40.1128
Manufacturer	ROLINE
Manufacturer No.	19.40.1128
EAN (single piece)	7630049628021

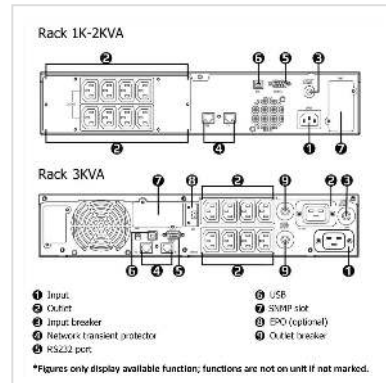

The ROLINE LineSecure UPS series uses line-interactive technology and is used wherever reliable protection is required.

The LineSecure III UPS series, with its intelligent design and pure sine wave output for connected applications, is the best choice for office, SOHO, and home applications. It provides high-quality pure sine wave output for connected critical devices. Additionally equipped with an AVR (Automatic Voltage Regulator), it stabilizes fluctuating voltages such as overvoltages and undervoltages as well as other voltage problems and provides a stable output voltage for the most important devices. The LS III series is equipped with a color LCD display that shows the UPS status and increases user-friendliness. The LS III series offers power protection, including overload, surge, and short-circuit protection. The USB port allows you to monitor UPS status, schedule UPS events, and receive instant notifications via a computer system or portable device. It also has a slot for an SNMP/web card.

In areas with significant voltage fluctuations, the UPS uses buck and boost regulation to compensate for differences between the input and target voltage. The battery management system monitors the UPS batteries and only charges them when necessary, extending battery life by up to 50%.

- RS232 interface
- USB interface
- Operating display via LCD panel
- Battery management
- Automatic voltage regulation

- Tel/modem protection
- SNMP/WEB via optional LAN adapter
- Sine wave output

Technical specifications	
Manufacturer	ROLINE
Product group	UPS
Product type	UPS Line Interactive, Rackmount
Colour	black
Scope of delivery	UPS, Software, Cable Set, (19" Rail Kit not included > see accessories!)
Classification (IEC 62040-3)	VI-SS-333
UPS technology	Line Interactive
Power class	2000 ... 3000 VA
Output (VA/W)	2000 / 1600
Efficiency	95 %
Backup time	3 min
Backup time full/half-load	3 / 6 min
Dimensions (HxWxD)	84 x 483 x 430
Mounting form	19" Rackmount
Voltage (input)	230V +- 10%
Voltage (output)	230V
Frequency	50Hz
Connector type (input)	Connector IEC320 C14
Outputs	8
Connector type (output)	8 x Cold Connector IEC320 C13
Phase in/output	230V/230V / 50Hz
Over current protection	EMI,- RFI-Filter
Max. quantity of delay expansion units	0

Delay expansion unit	--
Slots for adapter card	1
Slot for adapter card	1
Acoustic level	40dBA
Interface	USB, RS232
RS-232 Interface	yes
USB 2.0 Interface	yes
Hot swap batteries	no
Bypass	no
Additional over current protector	Telephone/Fax
Activity	Display
Activity LED	--
Activity Display	LCD
incl.Management Software	Windows
Internal cooling	Active, fan
Ambient temperature	0-40°C
Mains connection	Cold appliance connection
Battery category	Industrial battery
Number of batteries	2 pieces
Battery type	Pack
Battery	built-in
Battery technology	Lead-acid
Operating temperature min.	0 °C
Operating temperature max.	40 °C
Height	84 mm
Width	428 mm
Depth	431 mm

Weight	18.9 kg
Height of packaging (single piece)	170 mm
Width of packaging (single piece)	570 mm
Depth of packaging (single piece)	600 mm
Package weight (single piece)	22.06 kg