

Art.-Nr. / *Item No.*	Beschreibung / *Description*	Länge / *Length* (L)
65558	HDMI 2.1 Optical Hybrid Kabel (AOC) 01000 10m sw	10 m
65559	HDMI 2.1 Optical Hybrid Kabel (AOC) 02000 20m sw	20 m
65560	HDMI 2.1 Optical Hybrid Kabel (AOC) 03000 30m sw	30 m
65561	HDMI 2.1 Optical Hybrid Kabel (AOC) 04000 40m sw	40 m
65562	HDMI 2.1 Optical Hybrid Kabel (AOC) 05000 50m sw	50 m
65563	HDMI 2.1 Optical Hybrid Kabel (AOC) 07000 70m sw	70 m
65564	HDMI 2.1 Optical Hybrid Kabel (AOC) 08000 80m sw	80 m
65565	HDMI 2.1 Optical Hybrid Kabel (AOC)10000 100m sw	100 m

Aderquerschnitt / *Wire cross section*



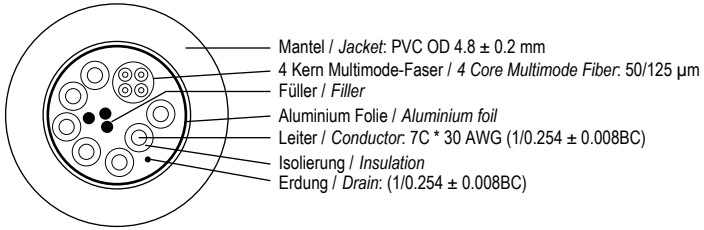

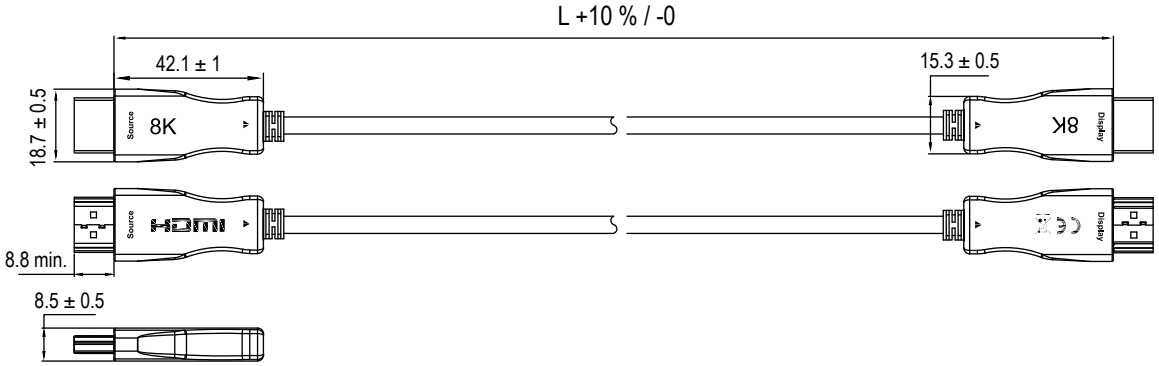

Optisches Hybrid Ultra High-Speed-HDMI™-Kabel mit Ethernet (AOC)

- hochauflösende Signalübertragung mit bis zu 8K @ 60 Hz (4320p) / 4K @ 120 Hz (2160p) und einer max. Übertragungsrate von bis zu 48 Gbit/s
- AOC-Basis (Active Optical Cable) mit einem hybriden Glasfaser-Kupferleiter
- vergoldete HDMI™-Stecker
- Signalrichtung muss beim Anschluss beachtet werden (unidirektional)

Anschlüsse:	2x HDMI™-Stecker (Typ A)
Max. Auflösung:	8K Ultra HD 4320p (60 Hz)
Max. Übertragungsrate:	48 Gbit/s
Signalrichtung:	unidirektional
Unterstützte Standards:	HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)
Betriebstemperatur:	0 °C ~ +50 °C
Lagertemperatur:	-20 °C ~ +70 °C

Optical Hybrid Ultra High Speed HDMI™ Cable with Ethernet (AOC)

- *high resolution signal transmission with up to 8K @ 60 Hz (4320p) / 4K @ 120 Hz (2160p) and a max. transmission rate of up to 48 Gbit/s*
- *AOC cable (Active Optical Cable) with HDMI™ connectors and a hybrid fibre-optic copper conductor*
- *gold-plated HDMI™ connectors*
- *signal direction must be observed when connecting (unidirectional)*

Connection:	*2x HDMI™ male (Typ A)*
Max. resolution:	*8K Ultra HD 4320p (60 Hz)*
Max. transmission rate:	*48 Gbit/s*
Signal direction:	*unidirectional*
Supported standards:	*HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)*
Operating temperature:	*0 °C ~ +50 °C*
Storage temperature:	*-20 °C ~ +70 °C*

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	13.10.2023	anw	HDMI 2.1 Optical Hybrid Kabel (AOC) XXXXX Xm sw	1/1
		gepr.:	13.10.2023	anw		
		Norm:			Zeichnungs-Nr.:	von
		Änderungen vorbehalten / *Subject to change*				