

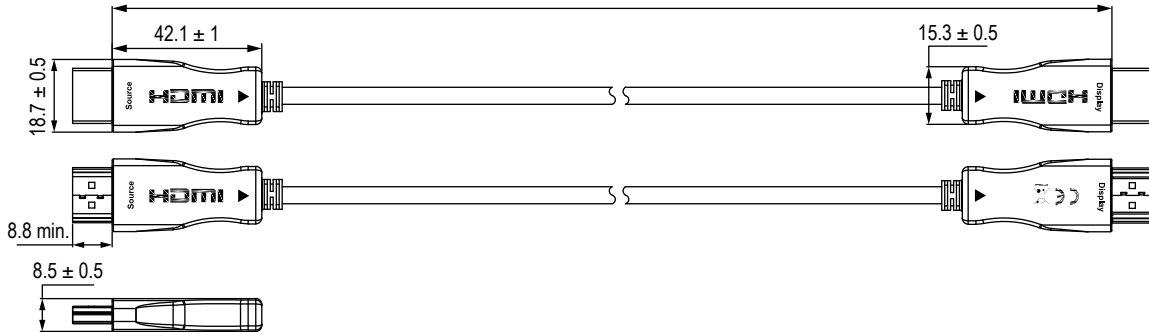


	1	2	3	4	5	6	7	8	9	10	11	12	13	14			
A	Art.-Nr. / Item No.		Beschreibung / Description			Länge / Length (L)									A		
	65566		HDMI 2.0 Optical Hybrid Kabel (AOC) 01000 10m sw			10 m											
	65567		HDMI 2.0 Optical Hybrid Kabel (AOC) 02000 20m sw			20 m											
	65568		HDMI 2.0 Optical Hybrid Kabel (AOC) 03000 30m sw			30 m											
B	65569		HDMI 2.0 Optical Hybrid Kabel (AOC) 04000 40m sw			40 m									B		
	65573		HDMI 2.0 Optical Hybrid Kabel (AOC)10000 100m sw			100 m											
C	Aderquerschnitt / Wire cross section  Mantel / Jacket: PVC OD 4.8 ± 0.2 mm 4 Kern Multimode-Faser / 4 Core Multimode Fiber: 50/125 µm Füller / Filler Aluminium Folie / Aluminium foil Leiter / Conductor: 7C * 30 AWG (1/0.254 ± 0.008BC) Isolierung / Insulation Erdung / Drain: (1/0.254 ± 0.008BC)														C		
D	D																
E			Optisches Hybrid High-Speed-HDMI™-Kabel mit Ethernet (AOC) - hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (2160p) und einer max. Übertragungsrate von bis zu 18 Gbit/s - AOC-Basis (Active Optical Cable) mit einem hybriden Glasfaser-Kupferleiter - vergoldete HDMI™-Stecker - Signalrichtung muss beim Anschluss beachtet werden (unidirektional) Anschlüsse: 2x HDMI™-Stecker (Typ A) Max. Auflösung: 4K Ultra HD 2160p (60 Hz) Max. Übertragungsrate: 18 Gbit/s, 6 Gbit/s pro Kanal Signalrichtung: unidirektional Unterstützte Standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID Consumer Electronics Control (CEC), Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC) Betriebstemperatur: 0 °C ~ +50 °C Lagertemperatur: -20 °C ~ +70 °C							Optical Hybrid High Speed HDMI™ Cable with Ethernet (AOC) - high resolution signal transmission with up to 4K @ 60 Hz (2160p) and a max. transmission rate of up to 18 Gbit/s - AOC cable (Active Optical Cable) with HDMI™ connectors and a hybrid fibre-optic copper conductor - gold-plated HDMI™ connectors - signal direction must be observed when connecting (unidirectional) Connection: 2x HDMI™ male (Typ A) Max. resolution: 4K Ultra HD 2160p (60 Hz) Max. transmission rate: 18 Gbit/s, 6 Gbit/s per channel Signal direction: unidirectional Supported standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID Consumer Electronics Control (CEC), Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC) Operating temperature: 0 °C ~ +50 °C Storage temperature: -20 °C ~ +70 °C							E
F	F																
G	G																
H	H																
I	Änderungen Datum Name gez.: 01.08.2023 anw gepr.: 01.08.2023 anw Norm: Änderungen vorbehalten / Subject to change Bezeichnung HDMI 2.0 Optical Hybrid Kabel (AOC) XXXXX Xm sw Zeichnungs-Nr.: Blatt 1/1 von														I		
J	J																
	1	2	3	4	5	6	7	8	9	10	11	12	13	14			

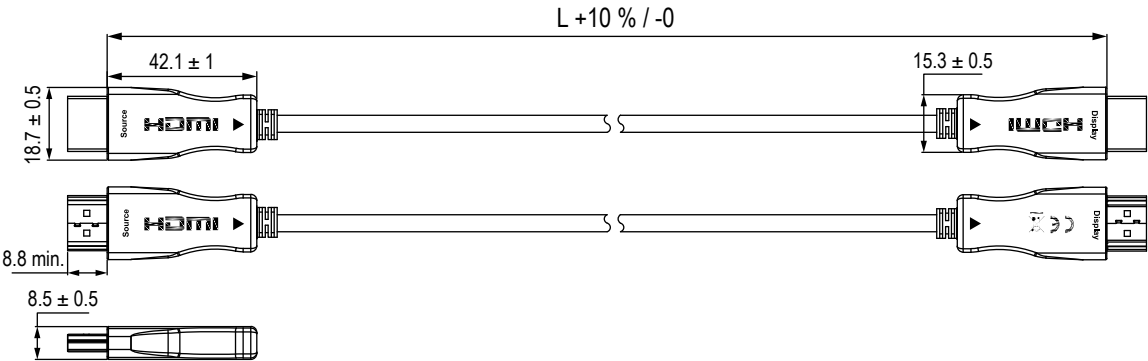

Optical Hybrid High Speed HDMI™ Cable with Ethernet (AOC)

- high resolution signal transmission with up to 4K @ 60 Hz (2160p) and a max. transmission rate of up to 18 Gbit/s
- AOC cable (Active Optical Cable) with HDMI™ connectors and a hybrid fibre-optic copper conductor
- gold-plated HDMI™ connectors
- signal direction must be observed when connecting (unidirectional)

Connection: 2x HDMI™ male (Typ A)
Max. resolution: 4K Ultra HD 2160p (60 Hz)
Max. transmission rate: 18 Gbit/s, 6 Gbit/s per channel
Signal direction: unidirectional
Supported standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID Consumer Electronics Control (CEC), Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)
Operating temperature: 0 °C ~ +50 °C
Storage temperature: -20 °C ~ +70 °C

