

TELESCOPIC




TFB-5160 X
Cod. **02034606** EAN **8422248101998**



- ☐ **Mechanical control panel**
- ☐ 2 extraction levels
- ☐ Extraction power (according to UNE/EN 61591): **300m³/h** - 160m³/h
- ☐ **Sound power (Reg.(EU) n°65/2014): 48dB(A)**, maximum: 61dB(A)
- ☐ Tangential motor. Extra silent. Maximum energy consumption **65W**
- ☐ **High efficiency Strip LED lighting**
- ☐ Easy-to-install system
- ☐ Dishwasher-washable filters
- ☐ Finished in Stainless steel
- ☐ Max. pressure 170Pa
- ☐ 150mm outlet diameter
- ☐ Energy Class: C

► **Accessories (not included)**

Active charcoal filterCod. 02859495 / EAN 8422248100281

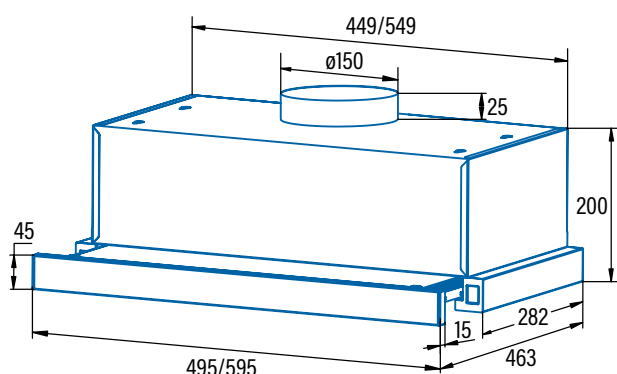

Code	02034606
EAN	8422248101998
Model	TFB-5160 X
Type	Telescopic
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	36,5
EEL class (Energy Efficiency Class)	C
FDE (Fluid Dynamic Efficiency)	8,86
FDE class (Fluid Dynamic Efficiency Class)	E
LE (Lighting Efficiency) (lux/W)	43,9
LE class (Lighting Efficiency Class)	A
GFE (Grease Filtering Efficiency)	60,6
GFE Class (Grease Filtering Efficiency class)	E
Air flow at minimum speed (m3/h)	158,4
Air flow at maximum speed (m3/h)	297,2
Air flow at intensive speed (TURBO) (m3/h)	-
Sound Power Level at minimum speed (dB)	47,8
Sound Power Level at maximum speed (dB)	61,1
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	-
Integration directive EU 66/2014	
f (Time Increase Factor)	1,68
EEL (Energy Efficiency Index)	76,34
QBEP (Flow Rate at Best Efficiency Point) (m3/h)	158,4
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	115,03
WBEP (Electric Power Input at Best Efficiency Point) (W)	57,11
WL (Nominal Power Consumption of Lighting system) (W)	2
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	87,8
External Dimensions	
Width (mm)	595
Depth (mm)	297
Total max height(mm)	200
Total min height(mm)	225
Outlet Diameter (mm)	150
Characteristics	
Motor	TT300
Extraction Levels	2
Motor Maximum Power Consumption	65
Maximum Pressure	170
Intensive Speed (TURBO) Pressure	-
Control Type	Rocker Switch
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metallic
Anti-grease Filter Number	2
Inner Shield	✓
Lighting	
Light Type	CSLED
Adjustable Intensity Lighting	-
N° of Lamps	1
Installation	
Minimum height distance to a electric worktop hob (mm)	550
Minimum height distance to a gas worktop hob (mm)	650
Installation with Outlet tube to the exterior / Recirculating	BOTH
Easy Installation System	✓
Electric Connection	
Total Rush Power (W)	67
Rated Voltage (V)	220-240
Network Frequency (Hz)	50 / 60
Electrical Insulation Class	CLASS I
Plug	VDE
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	-
MAX PRO Metal Filter	-
Metal Filter	02800981
DUAL Filter (metal + active charcoal)	-
Active Charcoal Filter	02859495
Noiseless Flexible Duct	-