

## TELESCOPIC




**TFB-5160 X**  
Cod. **02034606** EAN **8422248101998**



- ☐ **Mechanical control panel**
- ☐ 2 extraction levels
- ☐ Extraction power (according to UNE/EN 61591): **300m³/h** - 160m³/h
- ☐ **Sound power (Reg.(EU) n°65/2014): 48dB(A)**, maximum: 61dB(A)
- ☐ Tangential motor. Extra silent. Maximum energy consumption **65W**
- ☐ **High efficiency Strip LED lighting**
- ☐ Easy-to-install system
- ☐ Dishwasher-washable filters
- ☐ Finished in Stainless steel
- ☐ Max. pressure 170Pa
- ☐ 150mm outlet diameter
- ☐ Energy Class: C

► **Accessories (not included)**

Active charcoal filter .....Cod. 02859495 / EAN 8422248100281 .....

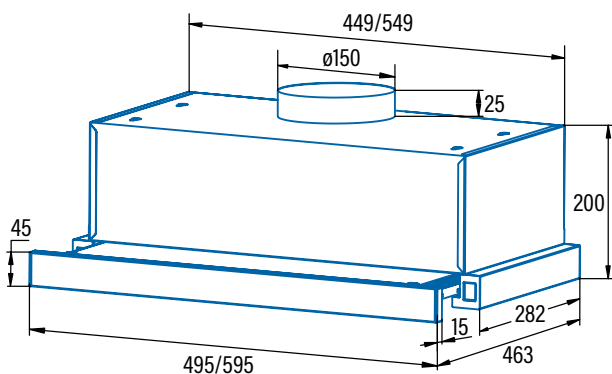

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| <b>Code</b>                                                                             | <b>02034606</b>      |
| <b>EAN</b>                                                                              | <b>8422248101998</b> |
| <b>Model</b>                                                                            | <b>TFB-5160 X</b>    |
| <b>Type</b>                                                                             | Telescopic           |
| <b>Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564</b> |                      |
| AEC (Annual Energy consumption) (kWh/annum)                                             | 36,5                 |
| EEL class (Energy Efficiency Class)                                                     | C                    |
| FDE (Fluid Dynamic Efficiency)                                                          | 8,86                 |
| FDE class (Fluid Dynamic Efficiency Class)                                              | E                    |
| LE (Lighting Efficiency) (lux/W)                                                        | 43,9                 |
| LE class (Lighting Efficiency Class)                                                    | A                    |
| GFE (Grease Filtering Efficiency)                                                       | 60,6                 |
| GFE Class (Grease Filtering Efficiency class)                                           | E                    |
| Air flow at minimum speed (m3/h)                                                        | 158,4                |
| Air flow at maximum speed (m3/h)                                                        | 297,2                |
| Air flow at intensive speed (TURBO) (m3/h)                                              | -                    |
| Sound Power Level at minimum speed (dB)                                                 | 47,8                 |
| Sound Power Level at maximum speed (dB)                                                 | 61,1                 |
| Sound Power Level at intensive speed (TURBO) (dB)                                       | -                    |
| Po (Power Consumption in off mode) (W)                                                  | 0                    |
| Ps (Power Consumption in standby) (W)                                                   | -                    |
| <b>Integration directive EU 66/2014</b>                                                 |                      |
| f (Time Increase Factor)                                                                | 1,68                 |
| EEL (Energy Efficiency Index)                                                           | 76,34                |
| QBEP (Flow Rate at Best Efficiency Point) (m3/h)                                        | 158,4                |
| PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)                         | 115,03               |
| WBEP (Electric Power Input at Best Efficiency Point) (W)                                | 57,11                |
| WL (Nominal Power Consumption of Lighting system) (W)                                   | 2                    |
| EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)              | 87,8                 |
| <b>External Dimensions</b>                                                              |                      |
| Width (mm)                                                                              | 595                  |
| Depth (mm)                                                                              | 297                  |
| Total max height(mm)                                                                    | 200                  |
| Total min height(mm)                                                                    | 225                  |
| Outlet Diameter (mm)                                                                    | 150                  |
| <b>Characteristics</b>                                                                  |                      |
| Motor                                                                                   | TT300                |
| Extraction Levels                                                                       | 2                    |
| Motor Maximum Power Consumption                                                         | 65                   |
| Maximum Pressure                                                                        | 170                  |
| Intensive Speed (TURBO) Pressure                                                        | -                    |
| Control Type                                                                            | Rocker Switch        |
| Automatic shut-down timer                                                               | -                    |
| Electronic Filter Saturation Indicator                                                  | -                    |
| Filter Type                                                                             | Metallic             |
| Anti-grease Filter Number                                                               | 2                    |
| Inner Shield                                                                            | ✓                    |
| <b>Lighting</b>                                                                         |                      |
| Light Type                                                                              | CSLED                |
| Adjustable Intensity Lighting                                                           | -                    |
| N° of Lamps                                                                             | 1                    |
| <b>Installation</b>                                                                     |                      |
| Minimum height distance to a electric worktop hob (mm)                                  | 550                  |
| Minimum height distance to a gas worktop hob (mm)                                       | 650                  |
| Installation with Outlet tube to the exterior / Recirculating                           | BOTH                 |
| Easy Installation System                                                                | ✓                    |
| <b>Electric Connection</b>                                                              |                      |
| Total Rush Power (W)                                                                    | 67                   |
| Rated Voltage (V)                                                                       | 220-240              |
| Network Frequency (Hz)                                                                  | 50 / 60              |
| Electrical Insulation Class                                                             | CLASS I              |
| Plug                                                                                    | VDE                  |
| <b>Accessories</b>                                                                      |                      |
| Upper Decorative tube Extension                                                         | -                    |
| White Decorative Tube                                                                   | -                    |
| Black Decorative Tube                                                                   | -                    |
| Island Tube Enhancer                                                                    | -                    |
| Check Valve                                                                             | -                    |
| MAX PRO Metal Filter                                                                    | -                    |
| Metal Filter                                                                            | 02800981             |
| DUAL Filter (metal + active charcoal)                                                   | -                    |
| Active Charcoal Filter                                                                  | 02859495             |
| Noiseless Flexible Duct                                                                 | -                    |