


Bild / Picture



USB 2.0 zu 4 x Serielle RS-232 Ports
mit 2.0 Meter Kabel, (FTDI Chip-Set)

Anwendung / Application

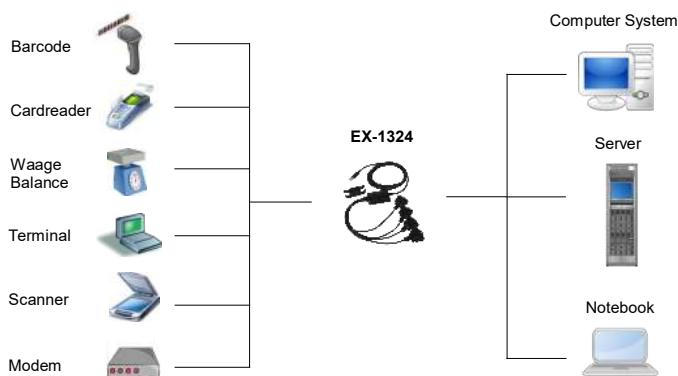

USB 2.0 to 4S x RS-232 ports
with 2.0 meter cable (FTDI chip-set)

Beschreibung

Das USB 2.0 zu RS-232 Kabel stellt vier Serielle RS-232 High Performance UART 16C550 Ausgang zur Verfügung. Er ist entwickelt worden um vier weitere Serielle Ausgänge für Notebook, PC, kleine Workstation oder Server über den USB 2.0 Bus zu erweitern. Durch die einfache Installation muss der Rechner nicht geöffnet werden und die EX-1324 kann bei laufendem Betrieb installiert werden. Zusätzlich wird ein Befestigungsadapter mitgeliefert mit der man die EX-1324 an die Wand oder in ein 19" Rack installieren kann.

Description

The USB 2.0 to RS-232 cable provides four high performance 16C550-type UART compatible RS-232 serial port. It is designed for Notebook, PC, thin client or server to provide instant COM port expansion via the USB 2.0 Bus. With the easy installation you don't need to open the computer system and install the EX-1324 when the system runs. We included a Wall mounting kit and DIN RAIL Kit, so that you can install the EX-1324 to the wall or in a 19 inch rack.

Merkmale

Features

• Schnittstelle RS-232 V.24	• Interface RS-232 V.24, RS-422 and RS-485 over a 5 pin Terminal Block
• 16C550 FIFO Buffer mit 16Byte	• 16C550 FIFO Buffer with 16Byte
• Daten Bits: 7 und 8	• Data bits: 7 and 8
• Stop Bits: 1, 1.5 und 2	• Stop bits: 1, 1.5 and 2
• Parity: none, even, odd, space und mark	• Parity: none, even, odd, space and mark
• Signale RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	• Signal RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
• Stromversorgung vom USB Bus (Bus Power)	• Power from the USB Bus (Bus Power)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	FTDI	Chip-Set:	FTDI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data transfer rate:	300Baud up to 921.6KBaud
Anschlüsse:	1 x USB 2.0 A-Stecker Upstream 4 x 9 Pin Seriell RS-232 Anschlüsse	Connectors:	1 x USB 2.0 A-male Upstream connector 4 x 9 pin serial RS-232 connectors
Hardwaresysteme:	USB 1.1, 2.0 oder 3.2 Gen1	Hardware system:	USB 1.1, 2.0 or 3.2 Gen1
Treiber:	Win98SE/ME/XP/200x/Vista/7/8/10 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x	Driver:	Win98SE/ME/XP/200x/Vista/7/8/10 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x
Betriebssysteme:	Gemäß Treiber	Operating systems:	According to driver
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-40°C bis +75°C	Storage temperature:	-40°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	Vom USB Port	Current Supply:	from the USB port
Abmessung:	Kabellänge 2.0 Meter	Size:	Cable length 2.0 meter
Gewicht:	450 g	Weight:	400 g
EAN:	4718359013249	EAN:	4718359013249
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-1324, Treiber CD, Handbuch	Packaging contents:	EX-1324, Driver CD, Manual