Datenblatt - Fiche technique - Data sheet


11.02.8318



ROLINE USB 2.0 LED Ladekabel, A - Micro B, ST/ST, 1,0 m

ROLINE LED Câble chargeur USB 2.0, A - Micro B, M/M, 1,0 m

ROLINE USB 2.0 LED Charging Cable, A - Micro B, M/M, 1.0 m

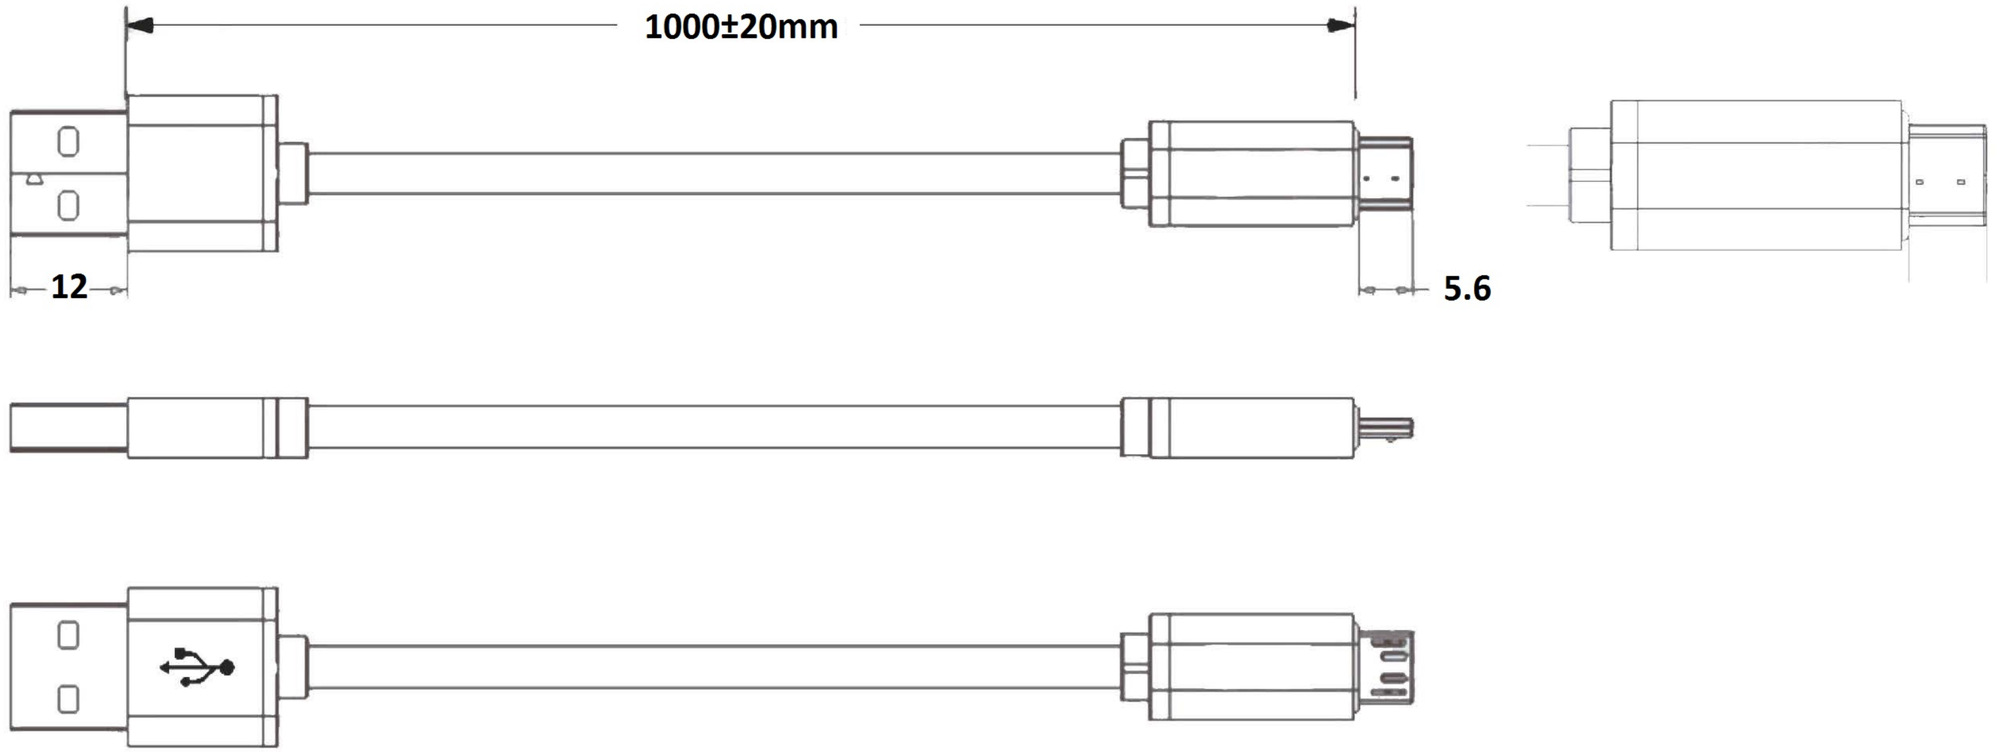

Pin Assignment

Conn. 1	Conn. 2
1	1
2	2
3	3
5	4

Description:

1. Outer Mould: Aluminum USB Connector - 15mm * 6.9mm * 14mm
   (black) Aluminum Micro B Connector - 10mm * 5.6mm * 19mm (Thickness: 0.5mm)
2. Inner Mould: LDPE - Transparent PE
3. Cable: (28AWG*1P + 24AWG*2C) + Aluminum Foil + Glossy Braided + TPE,
   Wire: Tinned Copper, OD: 4.0mm, Color: black
4. USB Port: USB 2.0 Micro BM, nickel plated
5. Output: Micro USB Connector - Micro Lamp Panel (nickel plated)

REV.	DATE	CONTENTS OF CHANGE	DESIGNER
1			
2			
3			
4			
5			

TOL ± / RANGE	Pla	Met	Ins	Por	V Cab	Pac	Gas	DIS
0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2
6~30	0.1	0.1	.15	.25	1	1	0.5	.25
30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3
80~180	.15	.15	.25	0.3	2	2	1	.45
180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6
315~800	0.2	0.3	0.4	0.5	3	3	2	1.1

APPROVAL	CHECK	DRAWING	DESIGN
Allen	Allen		Philip
	SCALE 1:1	UNIT	MM

DRAWING NAME	ROLINE LED Micro USB 2.0 Cable A-Micro B, M/M, 1m, black	
DATE		
2016-05-6	PART NO. 11.02.8318	R00

SECOMP

A3