
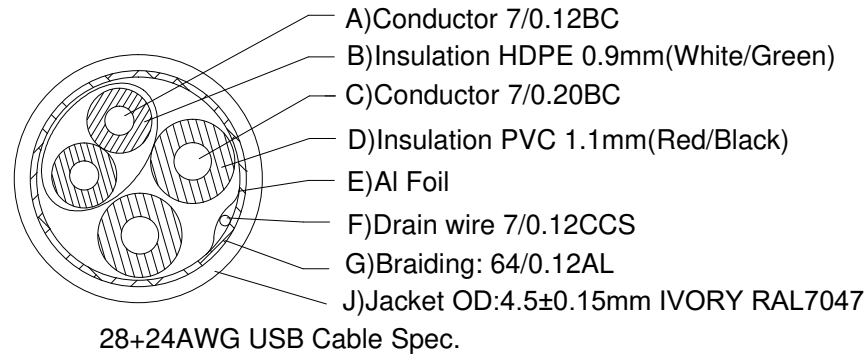
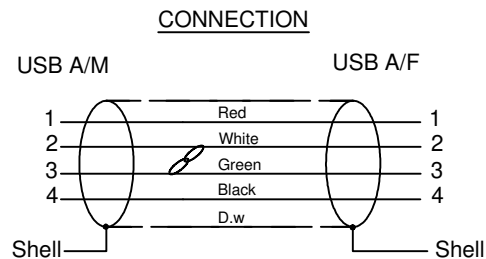


| REV. | REVISED DESCRIPTION | DATE       | CHECKED |
|------|---------------------|------------|---------|
| A0   | FIRST RELEASE       | 2018/08/09 |         |

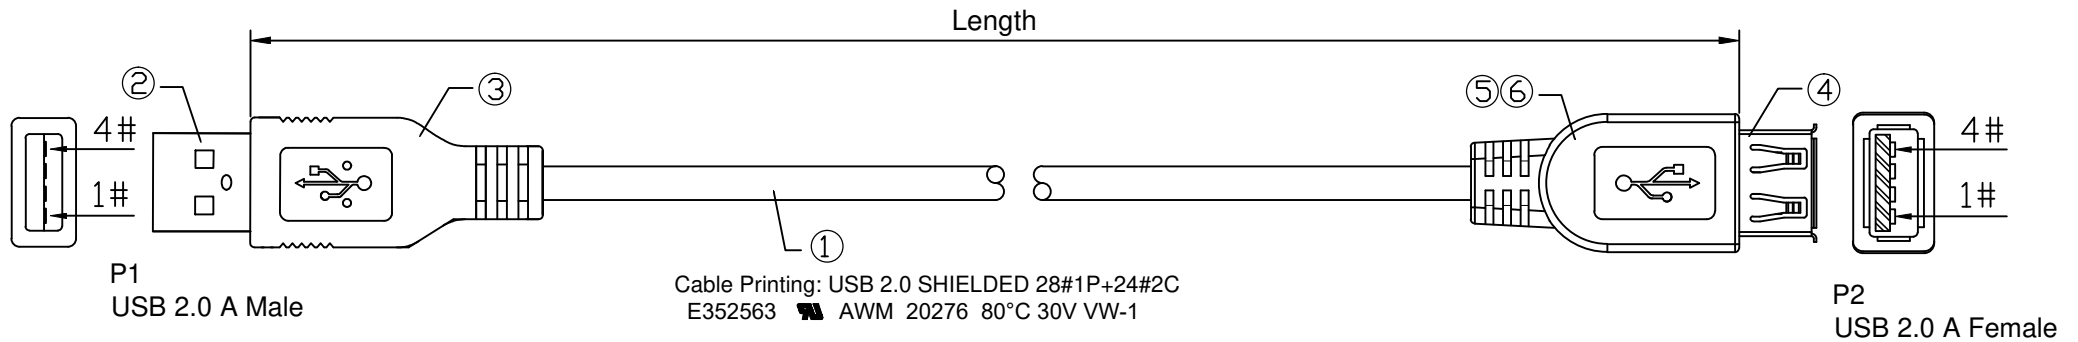

Remark:

- 100% Open/Short Test
- Conductive Resistance: 2ohms MAX
- Insulation Resistance: 5M ohm MIN.
- The product is Reach/RoHS compliant.

| Item NO. | Length(m) |
|----------|-----------|
| SB2198   | 0.5m      |
| SB2199   | 1.0m      |
| SB2200   | 1.8m      |
| SB2203   | 3.0m      |
| SB2205   | 5.0m      |

| ⑥    | External Mold                 | Outer Mould 45P PVC, IVORY RAL7047                                                                                           | 1PC |        |
|------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----|--------|
| ⑤    | Internal Mold                 | Inner Mould PE                                                                                                               | 1PC |        |
| ④    | Connector                     | USB A Female, Nickle-Plated                                                                                                  | 1PC |        |
| ③    | External Mold                 | Outer Mould 45P PVC, IVORY RAL7047                                                                                           | 1PC |        |
| ②    | Connector                     | USB A Male, Nickle-Plated                                                                                                    | 1PC |        |
| ①    | Cable                         | 28+24 USB Cable OD:4.5mm<br>28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC<br>+PVC)*2C+7/0.12CCS+64/0.12ALB<br>+OD4.5PVC IVORY RAL7047 |     |        |
| ITEM | DESCRIPTIONS & SPECIFICATIONS |                                                                                                                              | QTY | REMARK |

|                                       |  |
|---------------------------------------|--|
|                                       |  |
| TOLERANCES UNLESS<br>OTHERWISE STATED |  |
| X. = ± 1                              |  |
| .X = ± 0.2                            |  |
| .XX = ± 0.1                           |  |

|               |                                 |                 |            |
|---------------|---------------------------------|-----------------|------------|
| <b>ACT</b>    |                                 |                 |            |
| ERP NO.:      |                                 | SAMPLE DWG NO.: |            |
| DOC No.:      |                                 | REVISION        | A0         |
| CUSTOMER:     |                                 | UNIT            | mm         |
| CUSTOMER P/N: |                                 | SCALE           | NO         |
| DESCRIPTION   | 28+24<br>USB A Male TO A Female | PAGE NO         | 1/1        |
|               |                                 | DATE            | 2018/08/09 |
| APPROVAL      |                                 | CHECKED         |            |
|               |                                 | DRAWN           |            |