

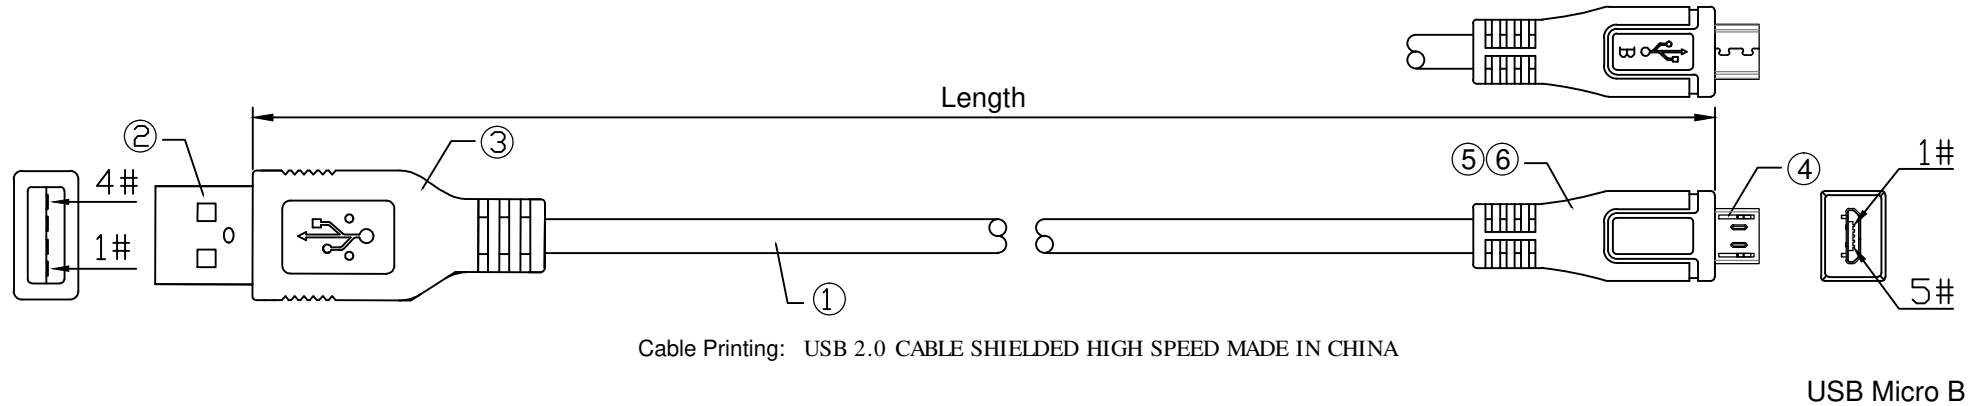


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/29	

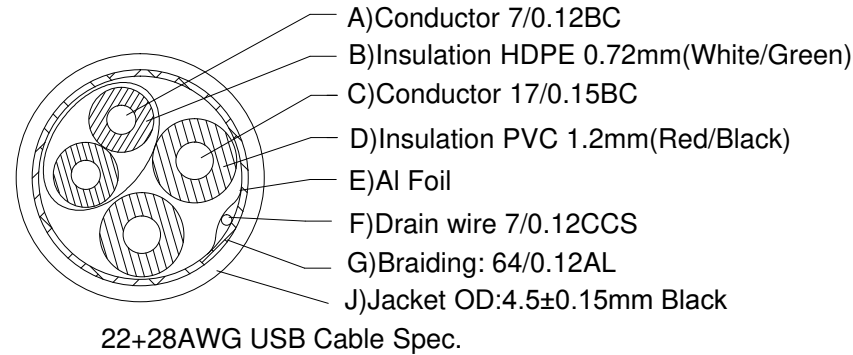

CONNECTION

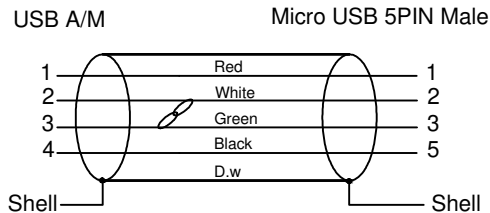


Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 20ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB0005	0.5m
SB0006	1.0m
SB2498	2.0m

⑥	External Mold	Outer Mould 45P PVC, Black	1PC	
⑤	Internal Mold	Inner Mould PE	1PC	
④	Connector	Micro USB Male, Nickle-Plated	1PC	
③	External Mold	Outer Mould 45P PVC, Black	1PC	
②	Connector	USB A Male, Nickle-Plated	1PC	
①	Cable	22+28 USB Cable OD:4.5mm 22+28 [7/.012BC(28AWG)+HDPE]*1P +[17/0.15BC (22AWG)+PVC]*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
22+28 USB A Male TO Micro B 5Pin		DATE	2019/11/29
APPROVAL		CHECKED	
		DRAWN	