



L±T

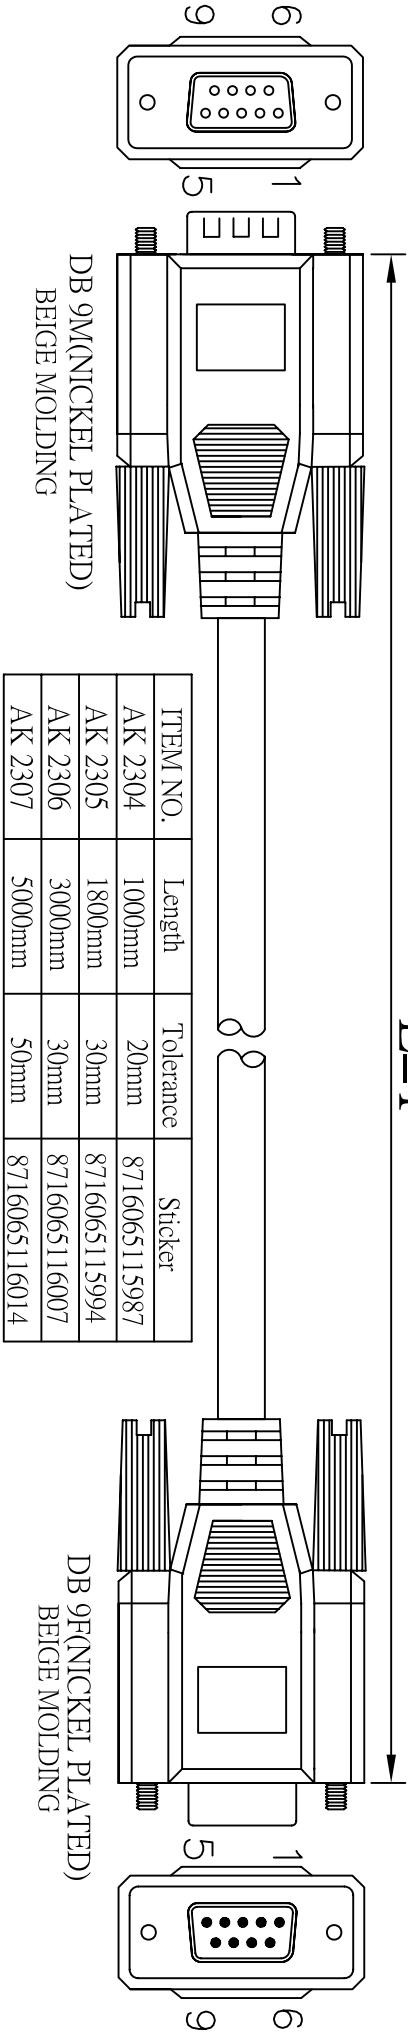

NOTE:


1. CABLE:NON-UL,28#*9C+1+AL,OD=5.0mm,BEIGE COLOR,PVC JACKET.
 2. LENGTH:L
 3. CONNECTORS: DB9F * 1PCS,DB9M*1PCS(BLUE INSULATOR,NICKEL PLATED)
 4. MOLD:BEIGE MOLDING.
 5. SCREW: #4*40 INCH SCREW *4PCS
 6. CONTACTS:
- DB9M | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 64
DB9F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 64
7. OPEN/SHORT TEXT 100% TEXT.
- INSULATION: MIN.5M.

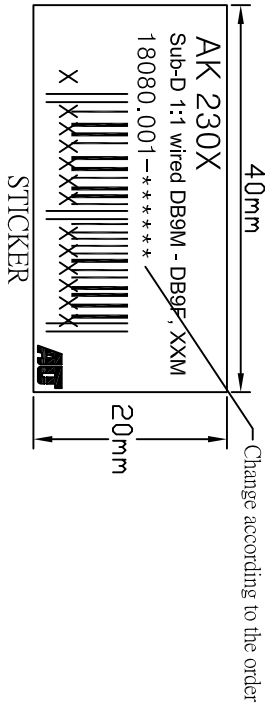

RoHS COMPLIANT.

Company	I.B.V	Goods Code		Draw	FC001 WJF	Date	2009.10.14	AK 230X	
ITEM NO.	AK 230X	Drawing Evidence :		Check		Date			
Goods NO.				Approval		Date			
Original NO.	S-*****	Unit(mm)							

1PCS/PE BAG(0.06*190*300mm)+Sticker

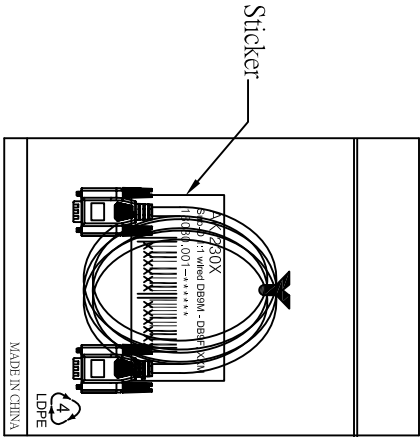

10000-100mm

40mm

AK 2309

Change according to the order

DB 9M(NICKEL PLATED)
BEIGE MOLDING


DB 9F(NICKEL PLATED)
BEIGE MOLDING


Sticker

1. CABLE:NON-UL,26#*9C+1+AL,OD=5.0mm,BEIGE COLOR,PVC JACKET.
2. LENGTH:10000mm
3. CONNECTORS: DB9F * 1PCS,DB9M*1PCS(BLUE INSULATOR,NICKEL PLATED)
4. MOLD:BEIGE MOLDING.
5. SCREW: #4*40 INCH SCREW *4PCS

DB9M	1	2	3	4	5	6	7	8	9	64
DB9F	1	2	3	4	5	6	7	8	9	64

ROHS COMPLIANT.

Company	I.B.V	Goods Code		A4	D			
ITEM NO.	AK 2309	Drawing Evidence :			C	Revised spell CONTACTS of NOTE 6.	2011.03.30	
Goods NO.			Check			B	Changed 30# to 26# / Adding packaging info	10.03.16WJF
Original NO.	S-*****	Unit(mm) 	Approval		Date	VER. A	REVISE	Date
			Draw	FC001 WJF	Date	2009.10.14		

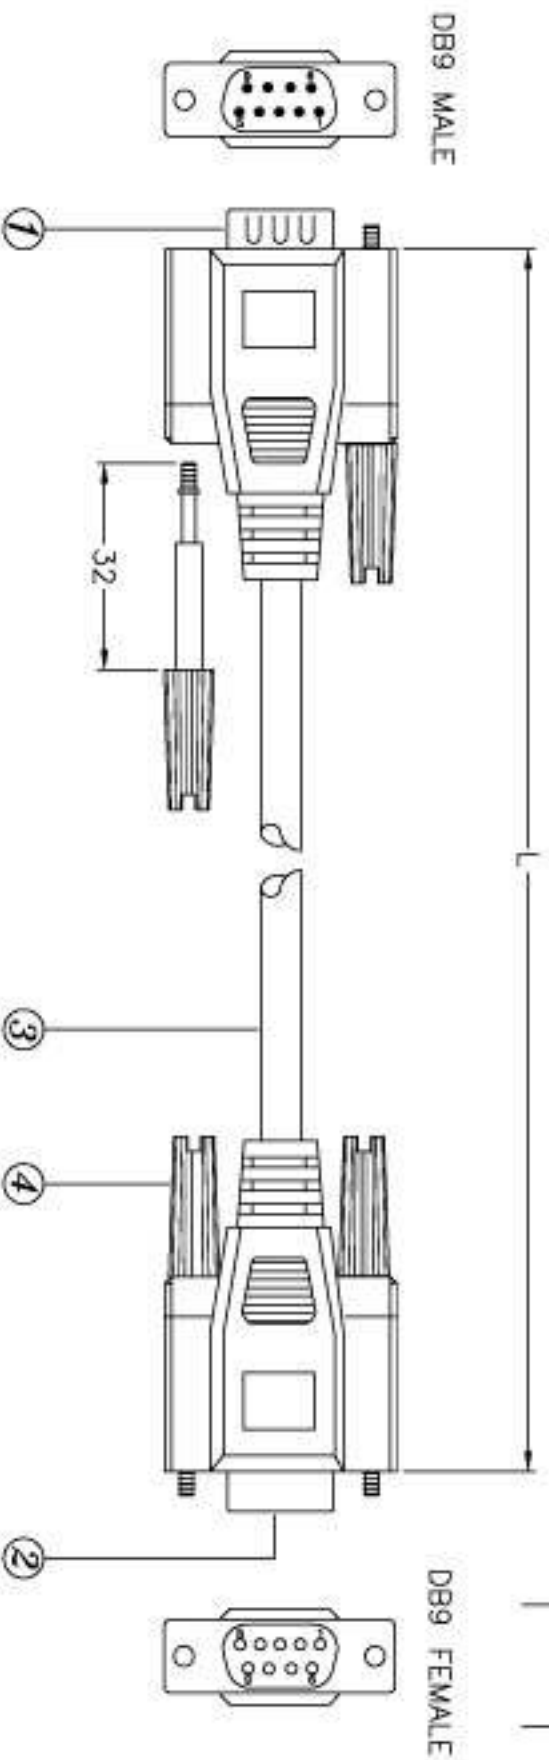

NOTE:
 1.CABLE:#26,9C+1+AL/MY,O.D:6.0
 2.CONNCTOR:DB9M,BLUE
 DB9F,BLUE
 3.THUMBSCREW:#4-40UNC,E32

NOTE:
 1.TOTAL LENGTH:L
 2.COLOR:BEIGE
 3.MOLDED TYPE

ITEM NO.	L
AK2308	7000±100mm
AK2309	10000±100mm
AK2321	15000±100mm
AK2322	20000±100mm
AK2323	25000±100mm
AK2324	30000±100mm

CONFIGURATION:
 DB9M DB9F

1
2
3
4
5
6
7
8
9
SHIELD

1
2
3
4
5
6
7
8
9
SHIELD

For internal use only!!!

DATE	8 JAN,2002	PARTS NO		TITLE:	DB9 MALE-DB9 FEMALE
UNIT	MM	DRAWN NO	AK2308		(MOLDED TYPE)
SCALE		BUYER NO	002		

NO.	DESCRIPTION	QTY
④	THUMBSCREW:#4-40UNC,E32	4
③	#26,9C+1+AL/MY,O.D:6.0,BEIGE	L
②	DB9F,BLUE	1
①	DB9M,BLUE	1

DRAWN	Y.C.C	CHECK	APPRO
1/8			