


IGS-2105 Hilbert 5-Port Industrial Gigabit Smart Lite Switch

Product Images



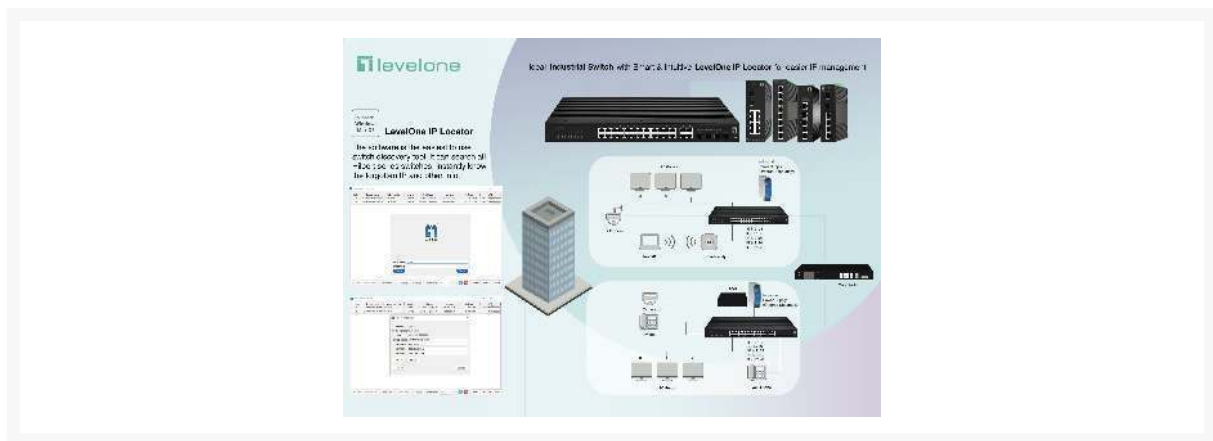

Short Description

- 5 Gigabit Ethernet ports
- 1000Mbps full-duplex, 10/100Mbps full/half-duplex, auto-negotiation, auto-MDI/MDIX
- Supports 2K MAC address auto-learning and auto-aging
- 9K jumbo frames to increase data transfer rates
- Support STP/RSTP Spanning Tree Protocol
- IP Multicast Filtering through IGMP Snooping V1 / V2
- 802.1Q tag-based VLAN allows network segmentation to enhance performance and security
- IEEE 802.1p QoS with 4 priority queues
- Supports unknown unicast / broadcast / multicast storm control
- Minimize carbon footprint with advanced energy efficient technology (IEEE 802.3az)
- 40°C to 75°C operating temperature range
- 4KV surge protection, 6KV contact / 8KV air ESD protection
- Supports DIN-rail installation
- Web-based and smart lite Management
- Supports LevelOne IP Locator for easier IP management.

Description

The LevelOne IGS-2105 Hilbert Industrial gigabit smart lite switch is a next-generation Ethernet Switch offering powerful better functionality and usability that delivers the cost-effectively business and transports Ethernet services via copper connections. IGS-2105 delivers 5 (10M/100M/1G) RJ45 ports. With the industrial standard DIN-rail mount, plus the clearly visible status LEDs provide simple monitoring of port link activity.. can be matched with the latest LevelOne IP Locator, the software is the easiest to use switch discovery tool, it can search all Hilbert series switches, instantly know the forgotten IP and other info. Compatible with mainstream Windows and Mac operating systems.

The LevelOne IGS-2105 provides high HW performance and environment flexibility for Enterprises. IGS-2105 is ideal to deliver management simplicity, optimum user experience, and lower total cost of ownership.

Additional Information

Color	Black
EAN	4015867236147
Model Number	IGS-2105
Features	L2 Switching Features ● IGMP Snooping ● Link Aggregation (Supports static link aggregation) ● Port Mirroring ● Cable Test VLAN ● Supports up to 32 VLANs (out of 4K VLAN IDs) ● MTU/Port/802.1Q VLAN Quality of Service (QoS) ● Support Port-based/802.1p/DSCP priority ● Support 4 priority queues ● Rate Limit ● Storm Control
Management	● Web-based Graphic User Interface (GUI) ● Supports LevelOne IP Locator for easier IP management.
Data rate	Gigabit Ethernet
PoE Supported	No
Fanless	Yes
Manageable	Yes
Series	HILBERT series
Grade	Industrial
Approval and Compliance	● CE ● UKCA ● FCC Part 15, Subpart B Class B ● RoHS
Operating humidity	10% RH ~ 90% RH
Operating temperature	-40°C ~ 75°C
Storage humidity	5% RH ~ 95% RH
Storage temperature	-40°C ~ 85°C
Package Contents	● IGS-2105 ● Power Terminal Block ● Din-rail Mount Kit ● Quick Installation Guide ● Declaration of Conformity
Switching capacity	10 Gbps
Dimensions (W x D x H)	136 x 108 x 38.5 mm
Product weight (kg)	0.35 kg

IP grade	IP30
Acoustic noise (dB)	0 dB (A)
Backplane (Gbps)	10
Dip switch	LOOP, VLAN ON/OFF
Flash memory size	2 MB
Packet forwarding rate	7.44 Mpps
Heat dissipation	17.06 (Btu/H)
Indicators	Power, Link/Act
Jumbo frame (KB)	9 KB
MAC address table	2 K
Mount	DIN rail mount
MTBF	43,800 hrs
Packet buffer	1.5 Mbits
Port Configuration	4x 10/100/1000 Mbps RJ-45 copper downlink ports, 1x 10/100/1000 Mbps RJ-45 copper uplink ports
Power consumption	5 W
Power input	Redundant Dual DC 12V/24V/48V
Power supply	VDC 12~57V
Power supply included	No
Standards	● IEEE 802.3 10-BASE-T (Ethernet) ● IEEE 802.3u 100-BASE-TX (Fast Ethernet) ● IEEE 802.3ab 1000BASE-T (Gigabit Ethernet) ● IEEE 802.3x Flow Control (full-duplex flow control) ● IEEE 802.3az: Energy Efficient Ethernet ● IEEE 802.1D Spanning Tree Protocol (STP) ● IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

