



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		ISSUED	Henry	25/10/11

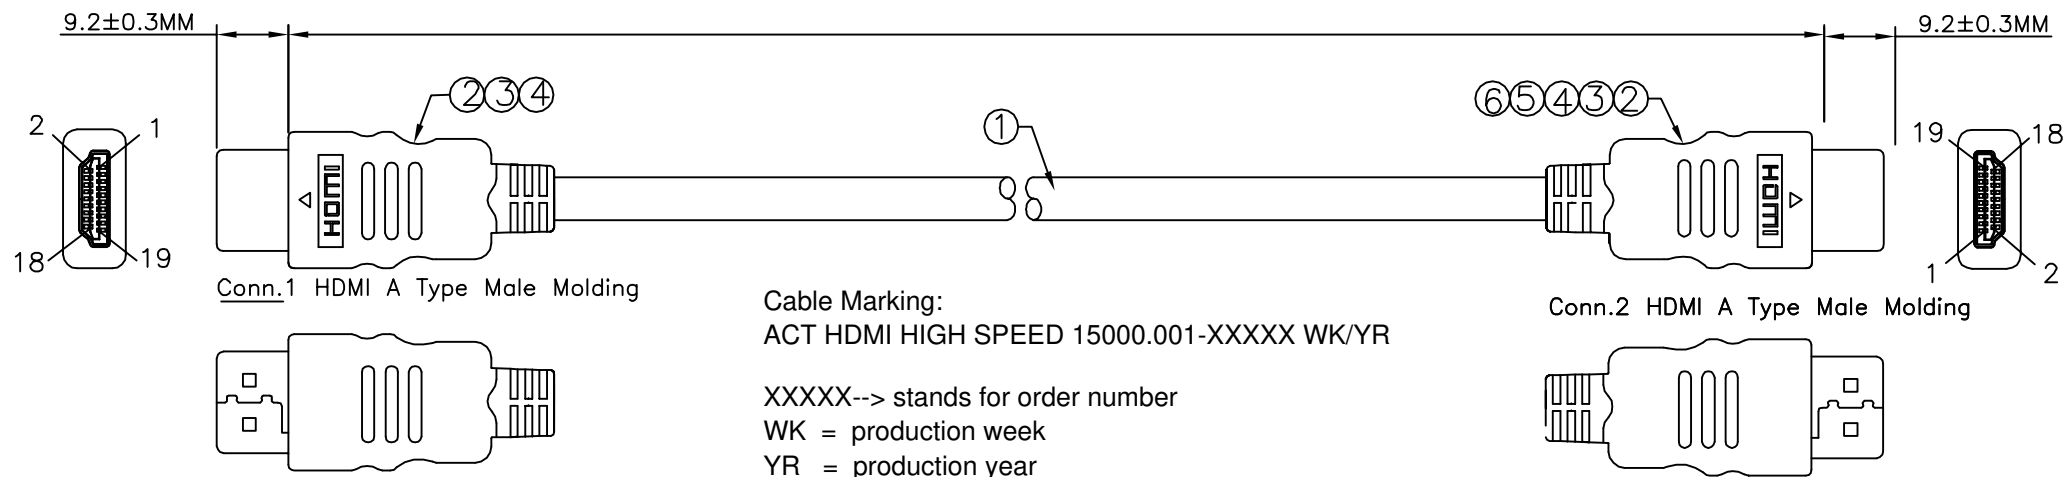

Electrical Test:


1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi -pot:300V DC/10ms
5. Electrical voltage: 100v AC/Minute, 1mA
6. RoHS compliant

AK3790	1 m
AK3791	1.5 m
AK3792	2 m
AK3793	3 m

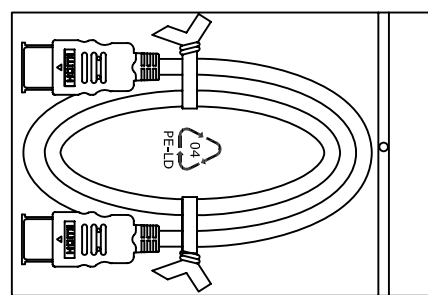

Package: 1pcs / per PE bag

Pin Assignment

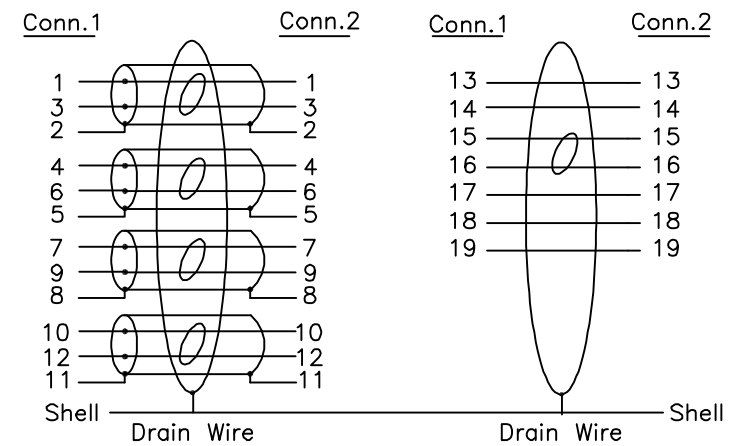

RoHS Compliant

④	Outside Molding: 45P PVC PMS: Black	20	g
③	Inside Molding: PE	6	g
②	HDMI 19P Male, Shell Gold Plated, Insulation: Black	2	Set
①	HIGH SPEED HDMI CABLE (1/0.25BC*1P+D:1/0.25BC (Insulation layer) + AL)*4P +1/0.25BC*1P+1/0.25BC*5C+ADB64/0.12AM OD:6.0MM+/-0.2MM	L	M
NO.	DESCRIPTION	Q'TY	UNIT

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE	AC
X. ±0.50 .X ±0.25 .XX ±0.15 .XXX ±0.05	X. ±2.0° .X ±1.0° .XX ±0.5°	Henry	22/10/12	
MATL	SEE BOM	CHECKED	DATE	PART NUMBER.
FINISH	SEE NOTES	APPROVED	DATE	DRAWING NO.
SCALE	N/A	SHEET	1 of 1	SIZE A4 REV. A