



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2017/10/27	

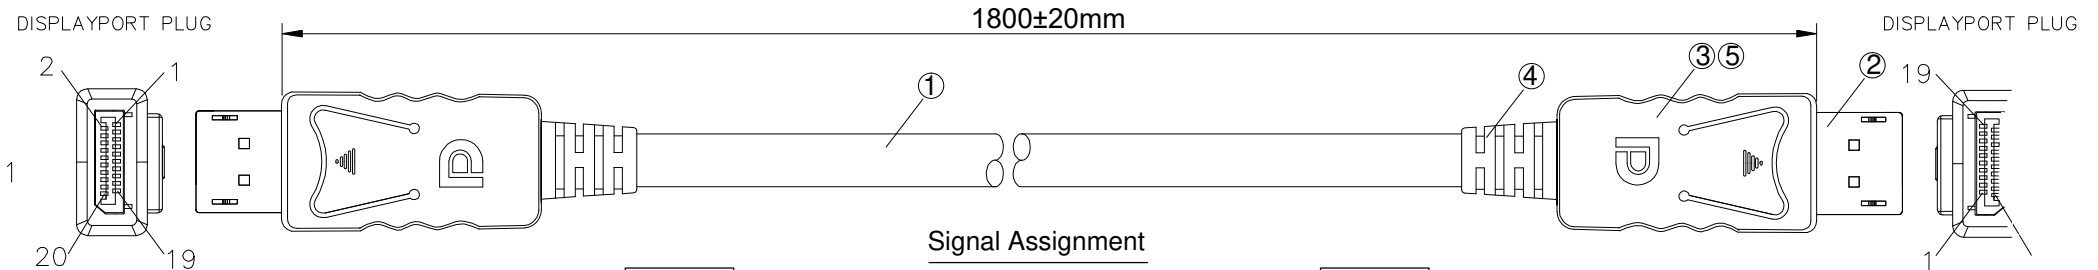

Signal Assignment

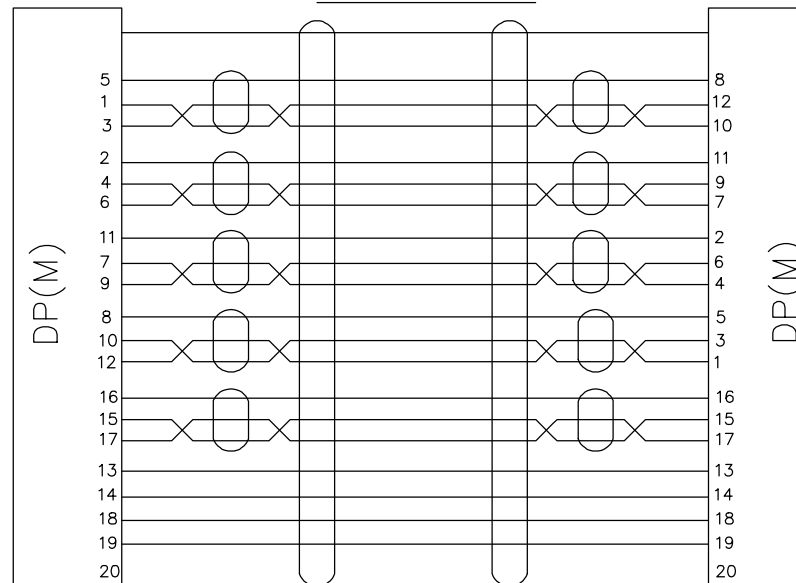

Remark:

1. 100% Open/Short Test
2. Conductive Resistance:5ohms MAX
3. Insulation Resistance:10M ohm MIN.
4. HI-POT:DC 300V/10MS.
5. The product is RoHS compliant.
6. 0.5m to 3.0m support 4K*2K@60Hz;
5.0m support 1080P@60Hz

Item NO.	Length(m)
AK3975	0.5m
AK3976	1.0m
AK3983	2.0m
AK3984	3.0m
AK3986	5.0m

⑤	Shell	ABS, DP(M) Shell	2Sets	
④	SR	60P PVC, Black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	DP PLUG PIN, Gold-Plated	2PCS	
①	Cable	(1Px30AWG +D+AL)x5p+5Cx30AWG+ML+AL+D+B; OD7.2mm PVC,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED	
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

AC

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
Dp to Dp Cable, L=1.8m		DATE	2017/10/27
APPROVAL		CHECKED	
		DRAWN	