


LTR	REV.	DESCRIPTION	DATE	APP'D

RoHS-COMPLIANT

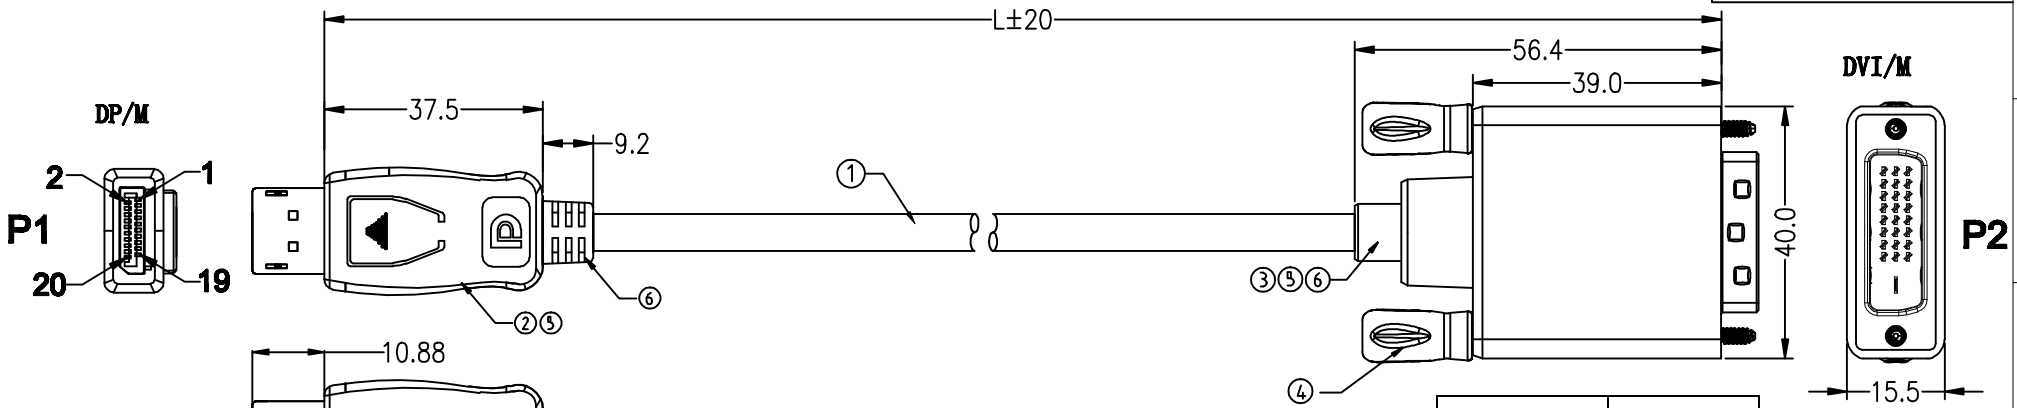

Item	L(M)
AK3989	0.5
AK3993	1.0
AK3995	1.8

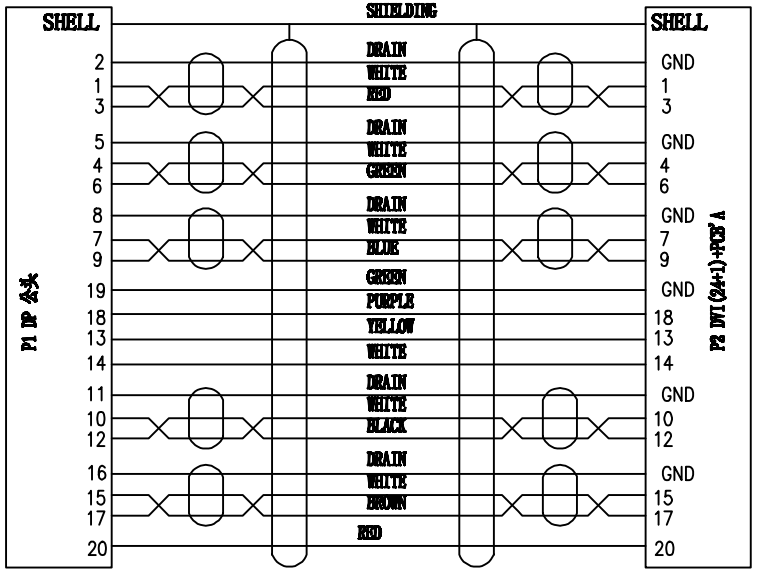

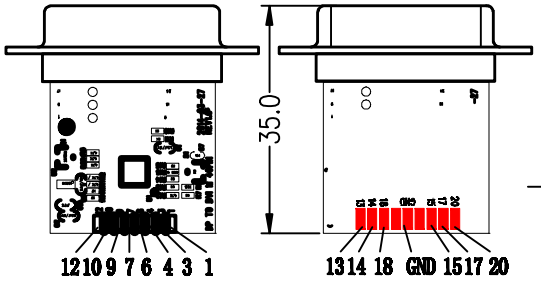

ELECTRICAL TEST:

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE:3 OHM MAX
3. INSULATION RESISTANCE:10M OHM MIN
4. HI-POT TEST:DC 300V/10ms
5. Displayport version: 1.1v
6. Max Resolution: 1920*1080P

NO.	NAME	SPEC	Q'TY	REMARK
6	MOLD	BLACK 45P PVC	A/R	
5	MOLD	LDPE, NATURAL COLOR	A/R	
4	SCREW	SCREW LENGTH4*60mm (DVI)NICKEL PLATED STEEL BLACK PVC MOLDING	2	
3	PLUG	DVI-D (24+1) /M, PIN G/F, BLACK PVC CORE, SHELL G/F,PCB'A(PS8121E)	1	
2	PLUG	DP/M, PIN G/F, BLACK PVC CORE, SHELL G/F,BLACK PVC SHELL	1	
1	CABLE	UL20276 #32*5P+#32*5C+AEB JACKET:BLACK PVC OD:5.0 L=500/1000/1500/2000mm	1	

ITEM: DP M TO DVI M BLACK CABLE

C.T | C.T ITEM

Tol.	Inch	mm	UNIT	mm	DRAWING:	HUANG
X.	.02	0.5	ANGLE	±	CHECK 1:	
X.X	.12	0.3	SCALE	NONE	CHECK 2:	
X.XX	.008	0.2	FONT	NONE	CHECK 3:	
X.XXX	.006	0.15	The third perspective		DATE	2015-09-23
X.XXX	.006	0.15			VER. A	PAGE 1/1