
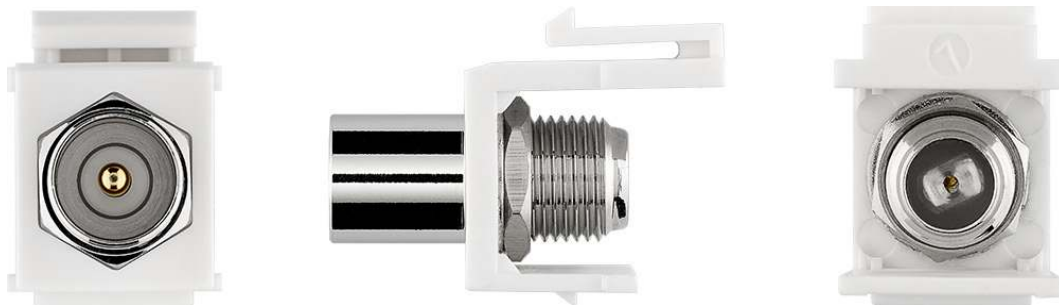

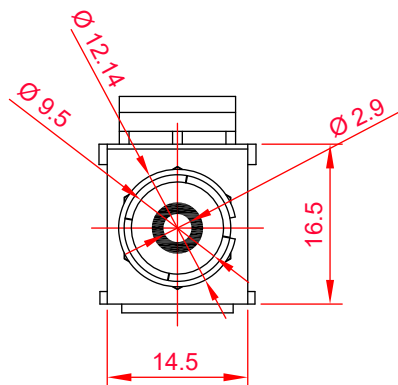




## Keystone Modul SAT/Antenne

- 16,2 mm Breite, Koax-Stecker > F-Buchse
- SAT-Anschluss zum Einbau in Keystone Patchpanel, Dosen und Gehäusen usw.

|                                  |                                  |
|----------------------------------|----------------------------------|
| Anschlüsse:                      | Koax-Stecker > F-Buchse          |
| Material Gehäuse:                | ABS                              |
| Material Kontakte:               | Kupfer                           |
| Widerstand:                      | 75 Ω                             |
| Vibration:                       | 100 m/s <sup>2</sup> (10~500 Hz) |
| Frequenzbereich:                 | DC ~ 1 GHz                       |
| Spannungsfestigkeit:             | 500 V RMS                        |
| Nennspannung:                    | 170 V max.                       |
| Kontaktwiderstand                |                                  |
| - Innenkontakt:                  | ≤ 10 MΩ                          |
| - Außenkontakt:                  | ≤ 5 MΩ                           |
| Isolationswiderstand:            | ≥ 1000 MΩ                        |
| Stehwellenverhältnis             |                                  |
| - Gerade:                        | ≤ 1.2                            |
| - Rechter Winkel:                | ≤ 1.3                            |
| Dauerhaftigkeit Steckverbindung: | 500x min.                        |
| Lagertemperatur:                 | -40°C bis +85°C                  |
| Betriebstemperatur:              | 0°C bis 70°C                     |

## Keystone Module SAT/antenna

- 16.2 mm width, Coaxial male > F female
- aerial connector for installation in Keystone patch panels, Ethernet sockets and housings

|                                    |                                  |
|------------------------------------|----------------------------------|
| Connectors:                        | Coaxial male > F female          |
| Material housing:                  | ASB                              |
| Material contacts:                 | copper                           |
| Impedance:                         | 75 Ω                             |
| Vibration:                         | 100 m/s <sup>2</sup> (10~500 Hz) |
| Frequency range:                   | DC ~ 1 GHz                       |
| Withstand voltage:                 | 500 V RMS                        |
| Working voltage:                   | 170 V max.                       |
| Contact resistance                 |                                  |
| - Center contact:                  | ≤ 10 MΩ                          |
| - Outer contact:                   | ≤ 5 MΩ                           |
| Insulation resistance:             | ≥ 1000 MΩ                        |
| Voltage Standing Wave Ratio (VSWR) |                                  |
| - Straight:                        | ≤ 1.2                            |
| - Right angle:                     | ≤ 1.3                            |
| Durability plug connection:        | 500x min.                        |
| Storage temperature:               | -40°C ~ +85°C                    |
| Operating temperature:             | 0°C ~ 70°C                       |

## Änderungen

| Datum | Name | gez.:                                      | Datum      | Name |
|-------|------|--------------------------------------------|------------|------|
|       |      | gez.:                                      | 29.06.2022 | ir   |
|       |      | gepr.:                                     | 29.06.2022 | aw   |
|       |      | Norm:                                      |            |      |
|       |      | Änderungen vorbehalten / Subject to change |            |      |

Bezeichnung

NET Keystone Coax IEC  
male to F female

Zeichnungs-Nr.:

79955

goobay®

Blatt

1/1

von