LCD DISPLAY

VA220-H


Key **Features**



- SuperClear® VA panel
- Full HD 1080p resolution
- 100Hz Variable refresh rate delivers fluid visuals
- 1ms (MPRT) response time for precision
- HDMI and VGA inputs for flexible connectivity

Product **Description**

The ViewSonic VA220-H is a 22” Full HD monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering are delivered through variable refresh rate, and various ViewMode presets. Experience truly seamless on just one screen with a VESA-compatible mount at a low power consumption.

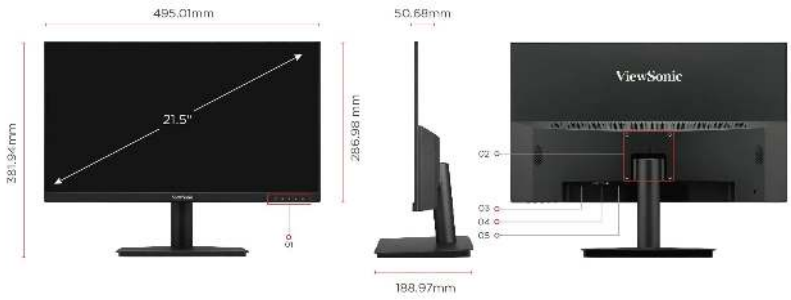

1. Menu Control Panel
2. VESA Compatible(Wall Mount 75x75mm)
3. HDMI
4. VGA
5. Power In

Visit Us www.viewsonic.com

DISPLAY	
Display Size (in.):	22
Viewable Area (in.):	21.5
Panel Type:	VA Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	4,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178º horizontal, 178º vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	100
Variable Refresh Rate Technology:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.249 mm (H) x 0.241 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY	
PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR	
VGA:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

POWER	
Eco Mode (Conserve):	16W
Eco Mode (optimized):	18W
Consumption (typical):	20W
Consumption (max):	22W
Voltage:	AC 100-240V
Stand-by:	0.3W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE	
Kensington Lock Slot:	1

CONTROLS	
Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS	
Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT	
VESA Compatible:	75 x 75 mm

INPUT SIGNAL	
Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 30 ~ 120KHz
Frequency Vertical:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 100Hz

VIDEO INPUT	
Digital Sync:	TMDS - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS	
Tilt (Forward/Back):	-3º / 15º

WEIGHT (IMPERIAL)	
Net (lbs):	5.5
Net Without Stand (lbs):	4.6
Gross (lbs):	7.3

WEIGHT (METRIC)	
Net (kg):	2.5
Net Without Stand (kg):	2.1
Gross (kg):	3.3

DIMENSIONS (IMPERIAL) (WXHXD)	
Packaging (in.):	21.7 x 15 x 4.2
Physical (in.):	19.49 x 15.04 x 7.44
Physical Without Stand (in.):	19.49 x 11.3 x 2

DIMENSIONS (METRIC) (WXHXD)	
Packaging (mm):	550 x 382 x 106
Physical (mm):	495.01 x 381.94 x 188.97
Physical Without Stand (mm):	495.01 x 286.98 x 50.68

GENERAL	
Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	VA220-H x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country) for VSE
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.