

DS-KAD706Y Two Wire Distributor



- 2-wire IP distributor
- 6-port 2-wire cascade interfaces without device power supply
- 2 cascade interfaces for DS-KAD704Y, DS-KAD706Y & DS-KAD706Y-S series
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24 VDC input power supply




▪ Specification

General	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Power supply	24 VDC
Power consumption	CH1 to CH5 < 6 W, CH6 < 16 W

▪ Available Model

DS-KAD706Y

▪ Dimension

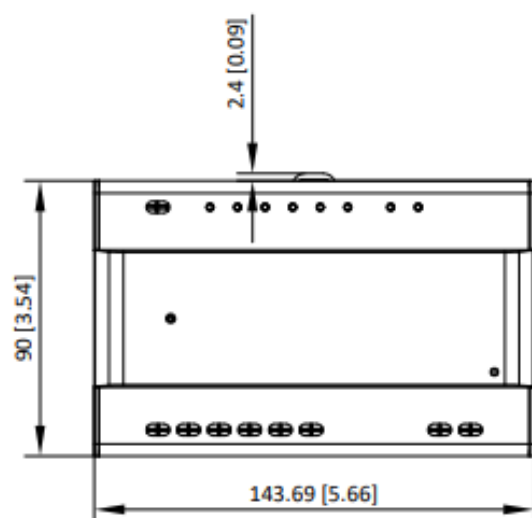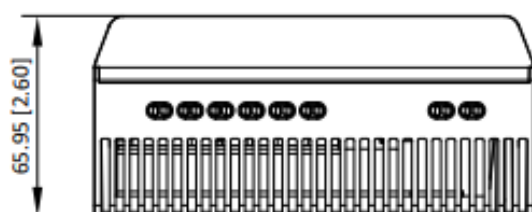

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**

DS-KAW60-2N Power Supply unit	DS-KAD706Y Two Wire Distributor	DS-KAD706Y-P Two Wire Distributor	DS-KAD706Y-S Two Wire Distributor	DS-KAD706Y-SP Two Wire Distributor
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq