




DESIGNED TO FILL GAPS WITH PRECISION AND QUALITY

# DRIFTIce™

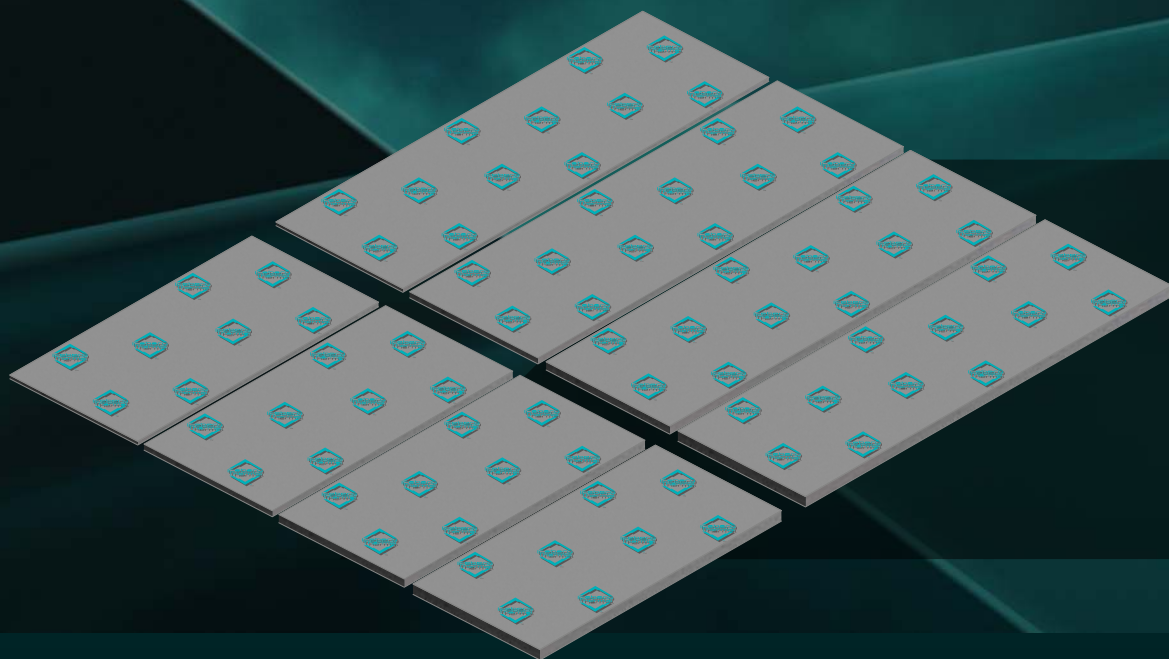

- Guaranteed Not to Harden or Corrode
- Made of Non-Toxic Material
- Precise and Even Contact, Filling Air Gaps

## DRIFTIce™

Thermal Conductivity, 13 W/mK  
Available in 2 Sizes and 4 Thicknesses

|      |                           |
|------|---------------------------|
| Size | 40 x 80 mm<br>40 x 120 mm |
|------|---------------------------|

|           |                                      |
|-----------|--------------------------------------|
| Thickness | 0.5 mm<br>1.0 mm<br>1.5 mm<br>2.0 mm |
|-----------|--------------------------------------|

|                  |                          |
|------------------|--------------------------|
| Specific Gravity | 3.14 g / cm <sup>3</sup> |
|------------------|--------------------------|

|          |             |
|----------|-------------|
| Hardness | 45 Shore 00 |
|----------|-------------|

|                      |         |
|----------------------|---------|
| Thermal Conductivity | 13 W/mK |
|----------------------|---------|

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -40°C to 200°C |
|-----------------------|----------------|

