

THE GERMAN
WORKSPACE
BRAND 



ICY BOX® IB-HUB1743-CPD

9-in-1 USB-C/A hub with Power Delivery


Key features

- 2x USB 3.2 Gen 2 Type-C® with a transfer rate of up to 10 Gbit/s and BC 1.2/ 7.5 watts
- 1x USB 3.2 Gen 2 Type-A with a transfer rate of up to 10 Gbit/s
- 3x USB 3.2 Gen 1 Type-A with a transfer rate of up to 5 Gbit/s
- 1x USB 3.2 Gen 1 Type-C® with a transfer rate of up to 5 Gbit/s
- 1x USB Type-C® Power Delivery up to 20 watts
- Supports Power Delivery up to 100 watts upstream to host
- Integrated USB Type-C®/A host cable (up to 10 Gbit/s), 60 cm



Packing content

IB-HUB1743-CPD
12 V/4 A power adapter, 120 cm
Manual

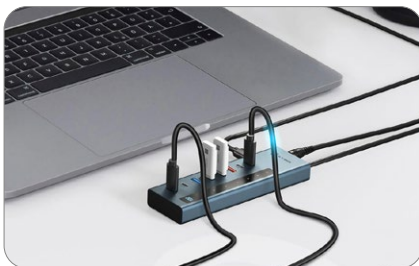

Multi-connectivity

The IB-HUB1743-CPD provides 9 ports, including two USB Type-C® and one USB Type-A that offer data transfer speeds of up to 10 Gbit/s. It also has three additional USB Type-A ports and one USB Type-C® with transfer speeds of up to 5 Gbit/s. You can easily connect multiple devices for stable and reliable performance across your setup.



Solid and durable

Crafted with a solid aluminum body, this hub offers both strength and effective heat control. Its clean, modern look fits well in any setup, while the metal construction supports consistent performance during heavy use. Built to last, it handles both style and cooling in one compact design.



Data transfer with PD

This hub offers fast data transfer with its USB 3.2 Gen 2 Type-C® and USB Type-A ports, supporting speeds up to 10 Gbit/s. It also features a Power Delivery upstream port providing up to 100 W to power your notebook, along with a dedicated PD charging port delivering 20 W for efficient charging of other devices.

Offers and deliveries are only done under our General Terms and Conditions. Errors and omissions excepted.

THE GERMAN
WORKSPACE
BRAND 



ICY BOX® IB-HUB1743-CPD

9-in-1 USB-C/A hub with Power Delivery

General data

Model	IB-HUB1743-CPD
Article no.	61158
EAN code	4250078174929
Colour	Blue
Material	Aluminum
Interface to host computer	USB 3.2 Gen 2 Type-C®
Length of cable	60 cm
Transfer rate	Up to 10 Gbit/s
UASP support	Yes
Plug & Play	Yes
LED	Power and access
ON/OFF button	Yes
Chipset	GL3590+AW3410*3+RM 1211+FL7102
Required space	-

Interfaces

USB 3.2 Gen 2 Type-A	1
USB 3.2 Gen 1 Type-A	3
USB 2.0 Type-A	-
USB4 Type-C®	-
USB 3.2 Gen 2 Type-C®	2
USB 3.2 Gen 1 Type-C®	1
USB Type-A Power Delivery	-
USB Type-C® Power Delivery	1
HotSwap	Yes

Additional features

Additional interfaces	-
Display	LED display for Power Delivery charging status
Kensington Lock	-
Degree of protection	-
Cooling	Passive
Mounting	-

Power

Power supply	12V / 4A power adapter
Plug dimension	Ø5.5 x Ø2.5 x L10 mm

Host system

Operating system	Windows®, macOS®, Linux®
System requirements	One free USB Type-C® or Type-A port on your host computer

Logistical data

Packing unit	16 pcs. / carton
Total weight	10.37 kg
Gross weight (with packing)	0.600 kg
Net weight	0.170 kg
Dimension / carton	428x308x238 mm
Dimension (with packing)	202x103x71 mm
Dimension of article	147x47x17 mm
Country of origin	China

Offers and deliveries are only done under our General Terms and Conditions. Errors and omissions excepted.