

DIGITUS Multiple socket outlet with aluminum profile and overvoltage protection, integrated mains filter, 9-way socket outlet with earthing contact, 2 m supply cable with earthing co

DIN 93438  
EAN 4016032501657



Aluminium PDU, Rackmountable, frequency filter, 2m 16A, 3600W,230VAC 50/60Hz,7x safety,2x outlet

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted vertically in the cabinet. An integrated mains filter and overvoltage protection protects the connected consumers from interference from the mains. Depending on the cabinet type, it is possible to mount the socket strip with the taps pointing to the right or left.

Secure and professional power supply in the network / server rack area

- Integrated mains filter

- Integrated overvoltage protection : Nominal discharge current (In) - 10 kA
- Vertical rack installation
- Rotation of the cans: 45°
- Housing: Aluminum
- Plastic components made of ABS UL-94V-0
- Input: safety plug CEE 7/7, 230 Vac / 16 A
- Output: appliance sockets 9 x socket outlet with earthing contact DIN 49440, max. 16 A per output
- Supply cable: H05VV-F 3G 1.5 mm², length: 2 m
- Dimensions: 620 x 45 x 45 mm (HxWxD)


Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 10           | 12.15       | 26.50      | 76.50      | 31.00       | 62,844.80 |
| Packaging Unit Inside        | 1            | 1.22        | 5.80       | 12.00      | 75.00       | 5,220.00  |
| Packaging Unit Single        | 1            | 1.22        | 5.80       | 12.00      | 75.00       | 5,220.00  |
| Net single without Packaging | 1            | 0.90        | 4.50       | 4.50       | 62.00       | 0.00      |

More images:



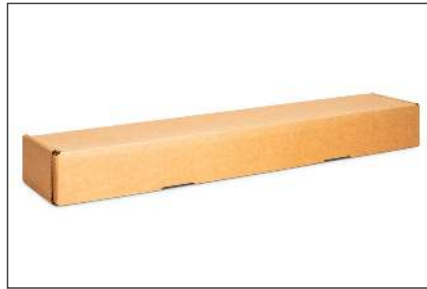

#### Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

#### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)