


**S PLUS 6010 X**Cod. **02060602** EAN **8422248093453**

- Mechanical Control Panel
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): 637m³/h - 361m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): 69dB(A), maximum: 74dB(A)
- Motor M3R. Extra silent. Maximum energy consumption 270W
- High efficiency compact Strip Led lighting
- Easy-to-install system
- Dishwasher-washable filters
- Finished in Stainless steel
- Max. Pressure 430 Pa
- 150/125 mm Outlet diameter
- Energy Class: C

Accessories (not included)

- Active charcoal filter Cod. 02859391 / EAN 8422248001595
- Check valve Cod. 02832001 / EAN 8422248044677
- Top tube Cod. 02861301 / EAN 8422248031073

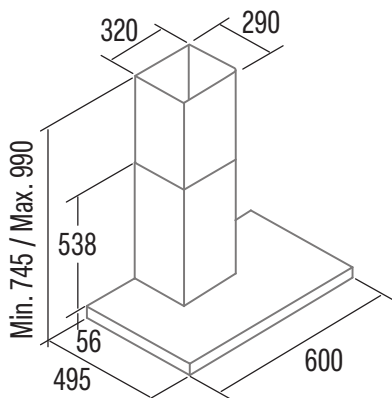

Code	02060602
EAN	8422248093453
Model	S PLUS 6010 X
Type	Box
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	98,7
EEL class (Energy Efficiency Class)	C
FDE (Fluid Dynamic Efficiency)	16,3
FDE class (Fluid Dynamic Efficiency Class)	D
LE (Lighting Efficiency) (lux/W)	30,3
LE class (Lighting Efficiency Class)	A
GFE (Grease Filtering Efficiency)	88,5
GFE Class (Grease Filtering Efficiency class)	B
Air flow at minimum speed (m³/h)	361
Air flow at maximum speed (m³/h)	637
Air flow at intensive speed (TURBO) (m³/h)	-
Sound Power Level at minimum speed (dB)	69
Sound Power Level at maximum speed (dB)	74
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	-
Integration directive EU 66/2014	
f (Time Increase Factor)	1,4
EEL (Energy Efficiency Index)	81,7
QBEP (Flow Rate at Best Efficiency Point) (m³/h)	375,3
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	295
WBEP (Electric Power Input at Best Efficiency Point) (W)	188,8
WL (Nominal Power Consumption of Lighting system) (W)	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	91
External Dimensions	
Width (mm)	600
Depth (mm)	500
Total max height (mm)	1045
Total min height (mm)	745
Outlet Diameter (mm)	150/125
Characteristics	
Motor	M3R
Extraction Levels	3
Motor Maximum Power Consumption	270
Maximum Pressure	430
Intensive Speed (TURBO) Pressure	-
Control Type	Mechanic
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metallic
Anti-grease Filter Number	2
Inner Shield	-
Lighting	
Light Type	CSLED
Adjustable Intensity Lighting	-
Nº of Lamps	1
Installation	
Minimum height distance to a electric worktop hob (mm)	650
Minimum height distance to a gas worktop hob (mm)	650
Instalation with Outlet tube to the exterior / Recirculating	BOTH
Easy Instalation System	√
Electric Connection	
Total Rush Power (W)	277
Rated Voltage (V)	220-240
Network Frequency (Hz)	50
Electrical Insulation Class	CLASS II
Plug	-
Accessories	
Upper Decorative tube Extension	02861301
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	02832001
MAX PRO Metal Filter	
Metal Filter	02800930
DUAL Filter (metal + active charcoal)	02800922
Active Charcoal Filter	02859391
Noiseless Flexible Duct	02893002