

Smart Switch Module

Dry/Wet Contact Mode



Tapo S110E



Energy Monitoring



Zero-crossing



Smart Actions



Matter Certified



Voice Control



Remote Control



Set Schedules



Auto-Off Timer




// Highlights

Versatile Integration Through Dry/Wet Contact Mode

Tapo S110E supports dual modes, ideal for handling a wide range of applications.


Dry Contact Mode

In dry contact mode, it is perfect for managing garage doors, boilers, irrigation and sprinkler systems, access control systems, and more.

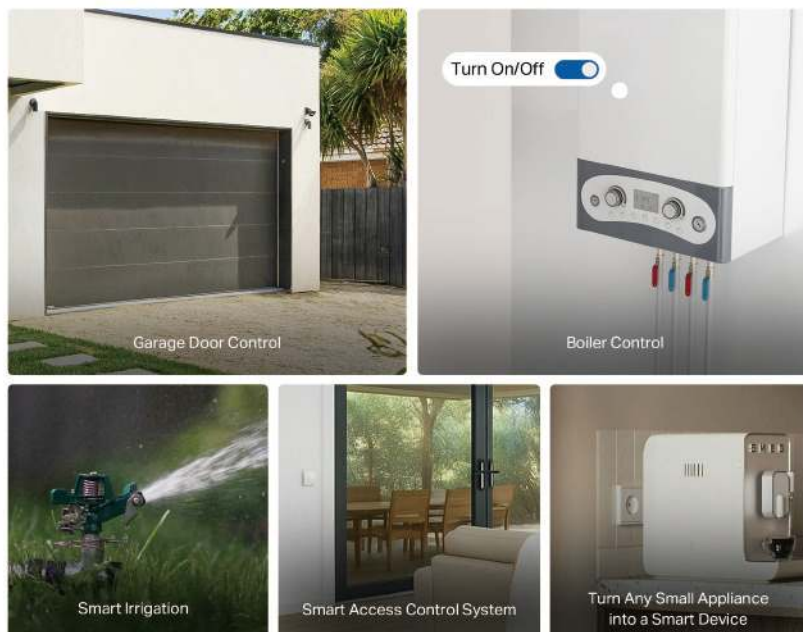

Wet Contact Mode

In wet contact mode, effortlessly control smart lights, outlets, and electric floor heating without replacing your existing equipment.

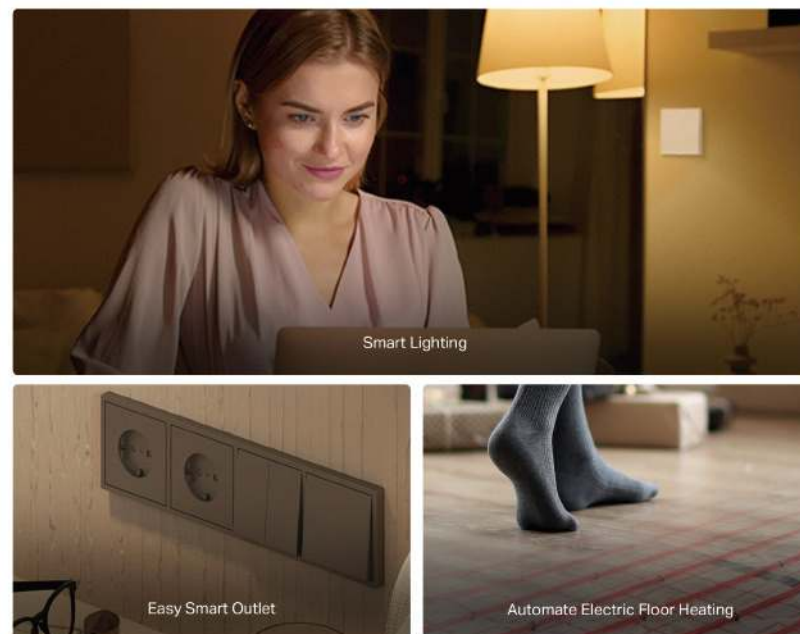

// Highlights

Bidirectional Energy Monitoring*

Unlike other products that require app settings for energy usage/generation modes, Tapo S110E features advanced hardware that automatically detects the current direction, offering a true plug-and-play experience without the need for manual setup. This makes it suitable for both balcony power stations and household appliances.



*Energy Monitoring is only available in wet contact mode with AC input.

// Highlights


Insightful Energy Tracking

Track your energy generation/use with clear and easy-to-understand stats and intuitive charts.



Take Control of Your Energy Bill

Better manage costs with flexible billing options and smart scheduling. Schedule power-hungry devices for off-peak hours to automatically save money.

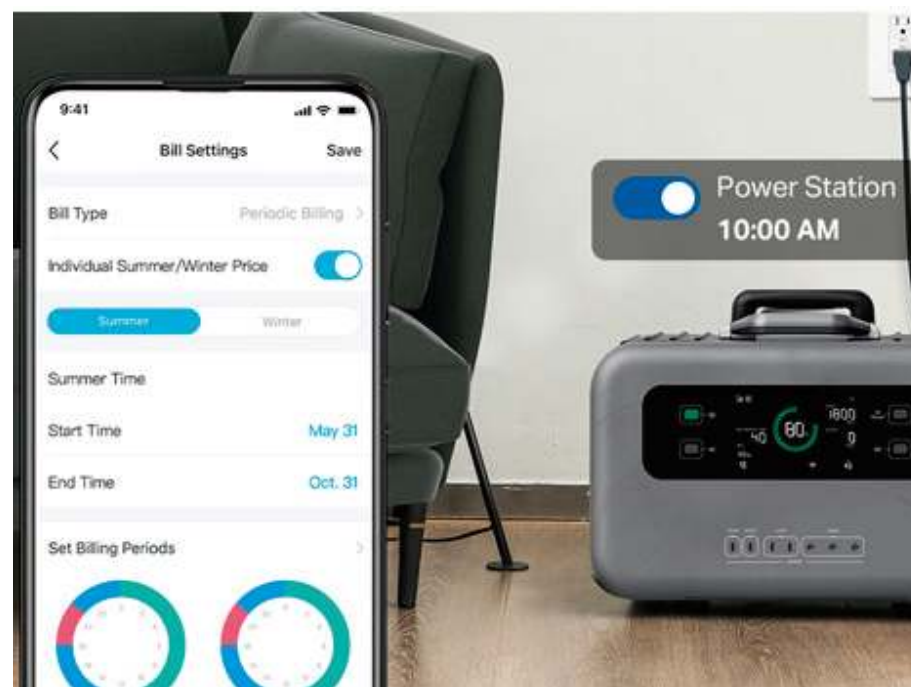

// Features

Schedule & Timer

Optimize heating schedules to control your boiler according to your daily routine, saving both energy and money on your bills.

Voice Control

Use simple voice commands for hands-free control of connected devices via Siri, Alexa, Google Assistant, or Samsung SmartThings.

Zero-Crossing Detection

Tapo introduces industrial-grade zero-crossing protection technology in a smart switch module made for consumers, preventing relay contact welding and extending the lifespan of smart switch modules by over 10 times.

*Based on Tapo laboratory results, actual performance may vary with usage conditions. Primarily suited for capacitive load devices like lights.

Matter Certified

Integrate Matter-certified Tapo devices with other Matter end products into your preferred ecosystem.

Set Scenes

Control multiple devices all at once for a customizable scene.

Remote Control

Control connected devices from anywhere at any time using the Tapo app. No longer worry about forgetting to turn off the light when leaving home.

// Specifications

Technical Specifications


- Rating:

Wet Contact Mode	Dry Contact Mode
AC Input: 100-250V ~, 50/60Hz	Input: 100-250V ~, 50/60Hz;
AC Output: 100-250V ~, 10A	24-60V $\equiv$
Resistive, 1.5A Motor, 150W LED	Output: 100-250V ~, 10A Resistive,
DC Input: 24-60V $\equiv$	1.5A Motor, 150W LED;
DC Output: 24-30V $\equiv$ 10A;	5-30V $\equiv$ 10A;
30-48V $\equiv$ 1.5A;	30-48V $\equiv$ 1.5A;
48-60V $\equiv$ 1A	48-60V $\equiv$ 1A
- Protocol: IEEE 802.11b/g/n, 2.4 GHz Wi-Fi, Bluetooth
- Dimensions: 44.7 × 33.9 × 16.1 mm

General

- Package Contents:

Tapo S110E × 1	Jumper Wire × 3
Wire Labels	Quick Start Guide
- Certifications: CE, RoHS
- Operating Temperature: -15 °C– 35 °C
- Operating Humidity: 10%– 90%RH, Non-condensing

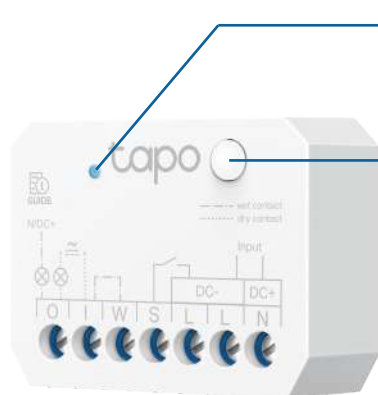

LED Indicator

Button

- Press and hold for **5s** to reset the Wi-Fi while keeping the previous settings.
- Press and hold for **10s** until the LED blinks red, then release it to restore factory settings.

Please do not use in damp environments or outdoors.
 For more information, please visit <https://www.tapo.com/>
 Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2025