

A

B

C


D

A




B

C

D

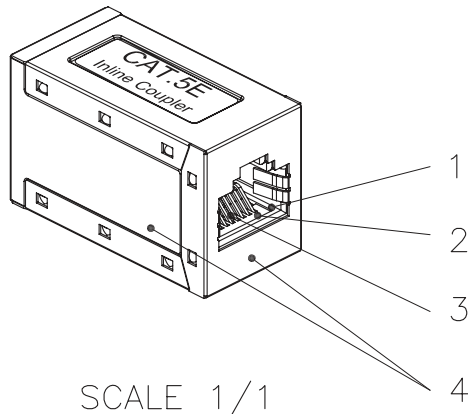

SCALE 1/1

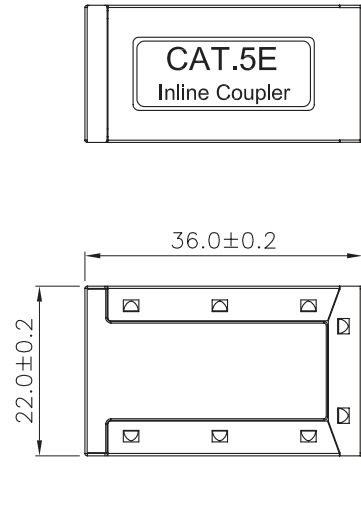


Specification :

Material :

- 1. Plastic Housing : ABS + PC, UL 94V-0.
- 2. Jack Bracket Set : Polycarbonate, UL 94-HB, Transparent color.
- 3. RJ45 Jack Contact material & finished :
 - 3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 3-2. Contact area : Min. 3 mm 50 micro-inch Gold plated.
- 4. Shield : Bronze with Nickel Plated.

Performance :

- a. Insertion Force : 900 gms for 8 contacts.
- b. Retention Strength : 7.7 kgs between Jack and Plug.
- c. Operation Temperature : -40°C to 80°C.
- d. Durability Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
- e. The Cat.5e performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		11.JAN.2007		Michelle								
	CHECK		12.JAN.2007		Jaimy								
	APPROVAL		12.JAN.2007		Jaimy								
			DATE		NAME		ITEM NO.:						
	SCALE		1/1 (A4)		UNIT		mm		DES.:				
			DRAWING NO.										
			DRAWING CLASSIFICATION			S	SHEET		1 OF 1				