


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A															A
B															B
C															C
D															D
E															E
F															F
G															G
H															H
I															I
J															J



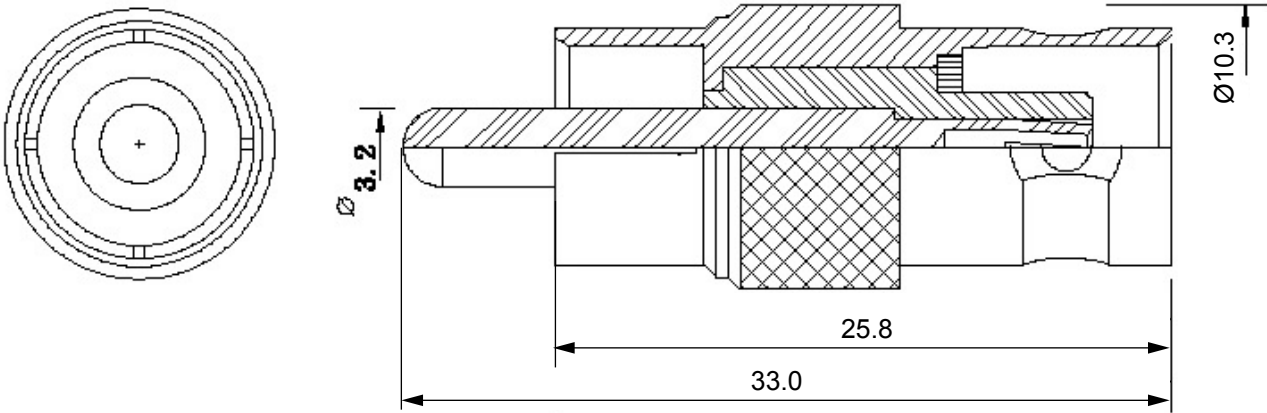

HF Adapter

Mechanik
Anschlüsse: BNC-Kupplung > Cinch-Stecker
Gewicht: 7 g

Elektrik
Testspannung: 2000 V~ 1 Min.
Isolationswiderstand: 1000 MΩ/Min. @ 500 V
Kontaktwiderstand: 15 MΩ max.
Impedanz: 50 Ω

Material
Kontakt: Messing; vergoldet
Gehäuse: Messing; vernickelt
Dielektrikum: Teflon; weiß

RoHS-konform

HF Adapter

Mechanical
Connectors: BNC jack > RCA plug
Weight: 7 g

Electrical
Test voltage: 2000 V~ 1 Min.
Insulation resistance: 1000 MΩ/Min. @ 500 V
Contact resistance: 15 MΩ max.
Impedance: 50 Ω

Material
Contact: Brass; gold-plated
Housing: Brass; nickel-plated
Dielectric: Teflon; white

RoHS compliant

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	24.02.2015	tf	NC 1524 RCA M - BNC F 	
		gepr.:	24.02.2015	tf		
		Norm:				von
			Änderungen vorbehalten / Subject to change		Zeichnungs-Nr.: 11355	