

NETWORK-/SERVER CABINET
UNIQUE SERIES – CONFIGURATIONS




B

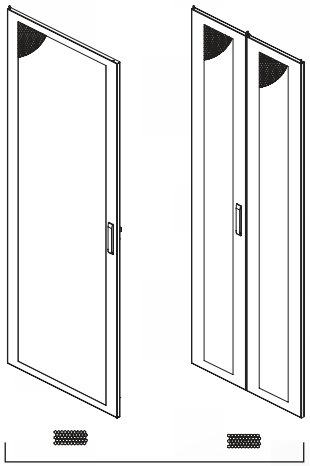


C

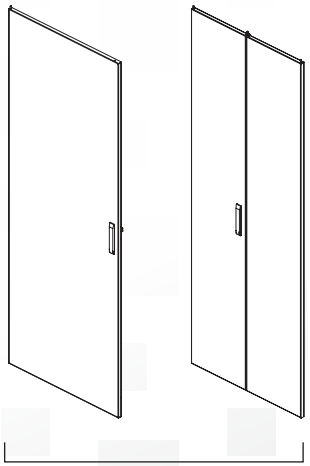

D

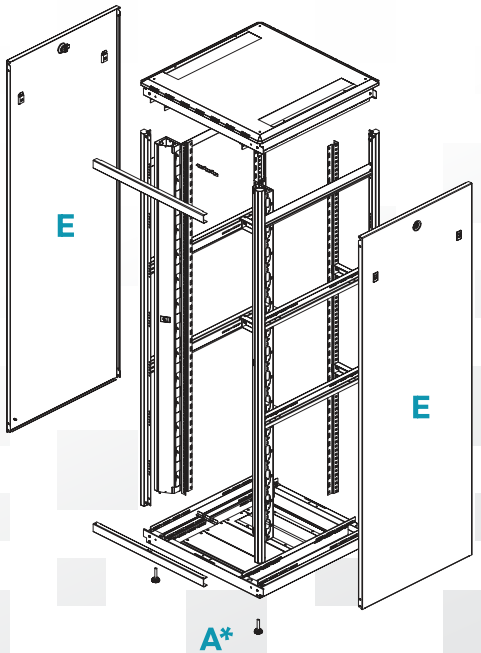

A*

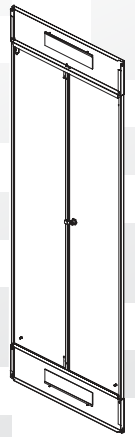

F

HU	Width x Depth in mm	A Base chassis* incl. roof & base	B Glass door		C Perforated steel door		D Closed steel door		E Side panel, single piece	F Steel rear door with cable entries**
			Single opening	Split opening	Single opening	Split opening	Single opening	Split opening		
26	600 x 600	■ □	■ □	✗	■ □	✗	✗	✗	Both sides, one side or without	■ □
	600 x 800	■ □	■ □	✗	■ □	✗	✗	✗	Both sides, one side or without	■ □
	600 x 1000	■ □	■ □	✗	■ □	✗	✗	✗	Both sides, one side or without	■ □
	800 x 800	□	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
	800 x 1000	■ □	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
32	600 x 600	■ □	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
	600 x 800	■ □	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
	800 x 800	■ □	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
36	600 x 600	■ □	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
	600 x 800	□	■ □	✗	✗	✗	✗	✗	Both sides, one side or without	■ □
	800 x 800	□	□	✗	✗	✗	✗	✗	Both sides, one side or without	□
42	600 x 600	■ □	■ □	✗	■	✗	□	✗	Both sides, one side or without	■ □
	600 x 800	■ □	■ □	✗	■	✗	□	✗	Both sides, one side or without	■ □
	600 x 1000	■ □	■ □	✗	■	✗	□	✗	Both sides, one side or without	■ □
	800 x 800	■ □	■ □	□	■ □	■ □	□	□	Both sides, one side or without	■ □
	800 x 1000	■ □	■ □	□	■ □	■ □	□	□	Both sides, one side or without	■ □
	800 x 1200	■ □	■ □	□	■ □	■ □	□	□	Both sides, one side or without	■ □
47	800 x 800	□	□	✗	✗	✗	✗	✗	Both sides, one side or without	□
	800 x 1000	□	□	✗	✗	✗	✗	✗	Both sides, one side or without	□

*: without doors/side panels
**: Steel rear door with cable entries for 600 mm width cabinets single opening; for 800 mm cabinets split opening

Note: Only the cabinet width is relevant for selecting doors.
Note: All standard doors (without cable entries) including swing handle with profile half-cylinder lock, can be used on front or rear side of the cabinet.