


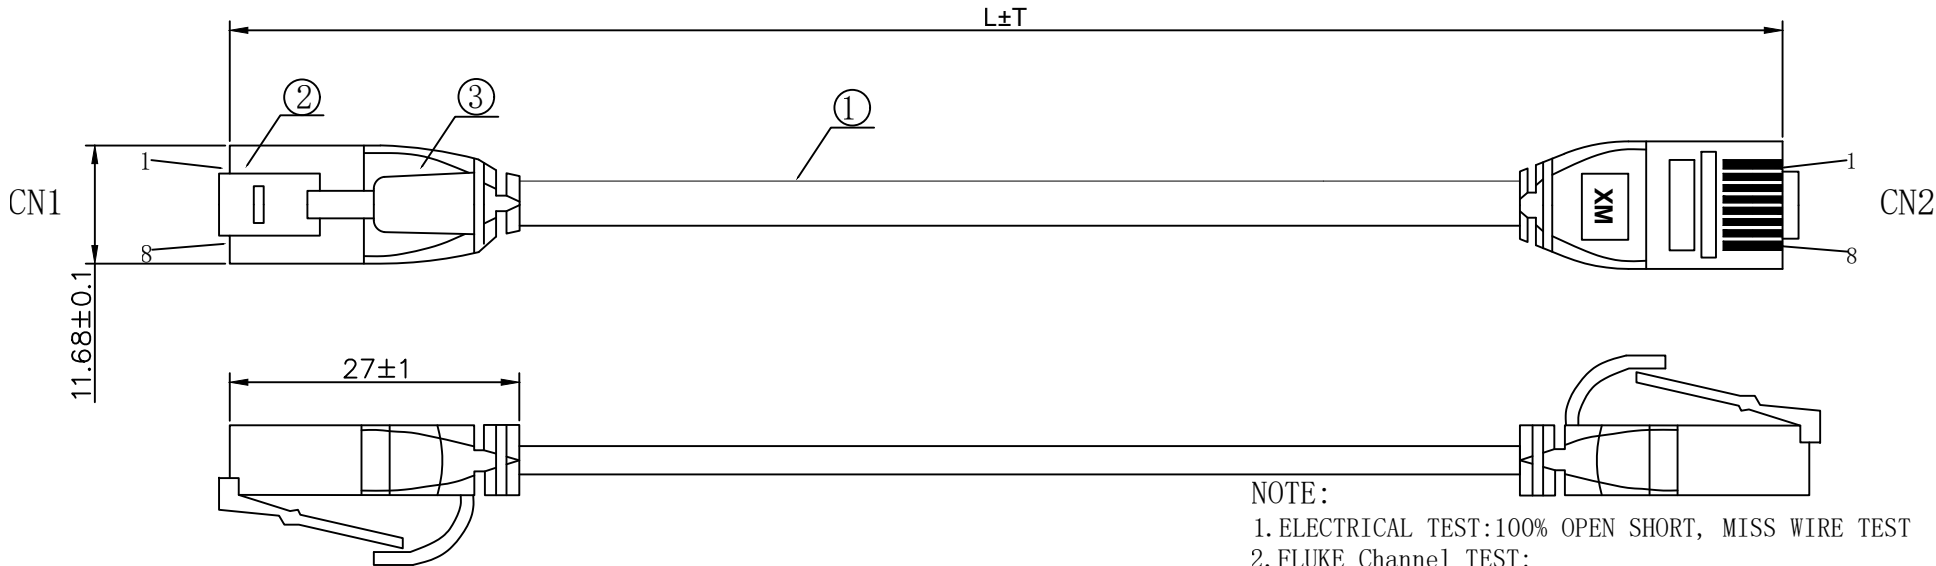


PIN OUT

CN1 (568B)

CN2 (568B)

WHITE-ORANGE	1	1	WHITE-ORANGE
ORANGE	2	2	ORANGE
WHITE-GREEN	3	3	WHITE-GREEN
GREEN	6	6	GREEN
BLUE	4	4	BLUE
WHITE-BLUE	5	5	WHITE-BLUE
WHITE-BROWN	7	7	WHITE-BROWN
BROWN	8	8	BROWN



NOTE:

- 1.ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
- 2.FLUKE Channel TEST:
TEST LIMIT:ISO11801 Channel Class Ea
- 3.Working temperature:-20℃~+75℃
Storage temperature:-20℃~+80℃
- 4.RoHS AND REACH compliant
- 5.PRINT WORD:CAT6A U/UTP 4x2x32AWG/7 RECYCLED PVC
ISO11801 & EN50173 & ANSI/TIA568. 2-D
- 6.Minimum of the bending radius is 4*OD (Suitable for all meters)

MATERIAL LIST:

③	OVER MOLD	RECYCLED PVC WHITE RAL9003	2	
②	PLUG	RJ45 8P8C UNSHIELDED PLUG, PIN GOLD PLATED 3U", COLOUR:TRANSPARENT GREEN	2	
①	CABLE	CAT. 6A U/UTP CABLE (32AWG BC*1P)*4P JACKET:RECYCLED PVC WHITE RAL9003 OD:3.4±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-11-30	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

21.45.3467	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 5m	5000±100	57.3%
21.45.3466	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 3m	3000±50	57.2%
21.45.3465	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 2m	2000±30	57.1%
21.45.3464	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 1.5m	1500±30	57.0%
21.45.3463	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 1m	1000±20	56.0%
21.45.3462	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 0.5m	500±20	55.5%
21.45.3461	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 0.3m	300±10	54.0%
21.45.3460	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl.EA, SLIM, white, 0.15m	150±10	53.0%
ITEM NO.	DESC.	LENGTH (mm)	The proportion of RECYCLED certification materials

SECOMP