


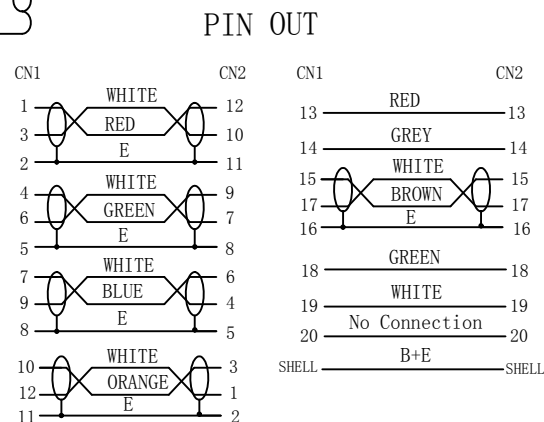

4.Display Port 1.2 Version

④	PLASTIC HOOD	COLOR/BLACK	2
③	OUTER MOLD	PVC 88A COLOR:BLACK	2
②	CABLE	DP 1. 2V 30AWG (1/0. 254BC*2C+E+AL+HM)*5+1/0. 254BC*4C+AEB E=1/0. 254BC B=0. 12mm/5*16 AL-MG JACKER:PVC/BLACK OD:6. 0±0. 2mm	1
①	CONNECTOR	Display Port 20P/M Pin Gold-Plated Fu"; Shell Ni-Plated; Connector with 3 layer shielding; Metal housing with 360° shield clamp and coppber foil	2
NO.	MAT. NAME	SPECIFICATION STANDARD	QT' Y

Length	ITEM NO.
0.5M	K5560SW.0.5
1.0M	K5560SW.1
1.8M	K5560SW.1.8
2.0M	K5560SW.2
3.0M	K5560SW.3

CUSTOMER'S ITEM	K5560SW. X		CUSTOMER		EFB		
DRAWING			TITLE	Display Port DP/M-DP/M			
UNIT	mm	SCALE		REV	A/0		
DRAWN BY		CHECK BY		APPRO BY		DATE	
Zhouqinghua						2019/12/02	