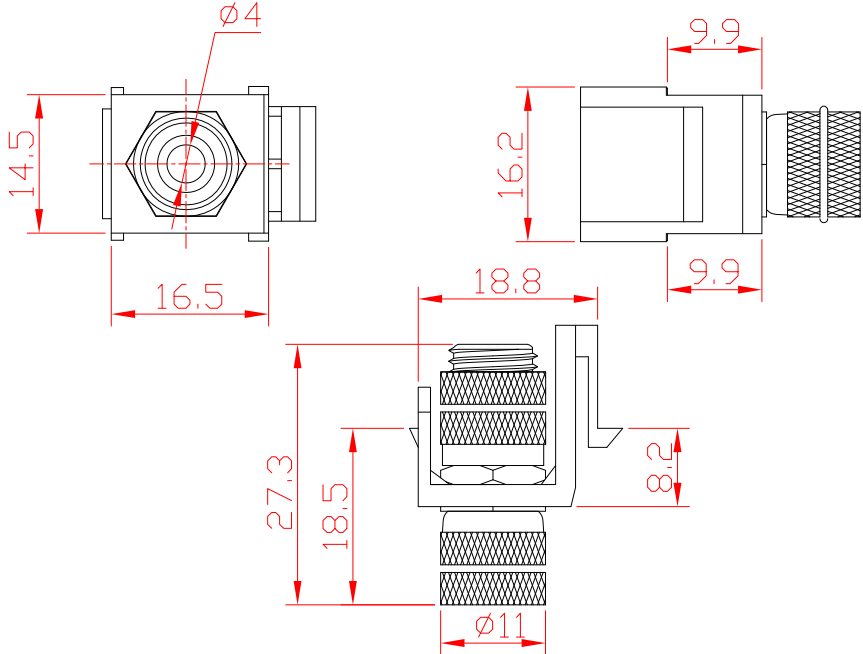


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A															A
B															B
C															C
D															D
E	Art.-Nr. Item No.		Farbe Colour												E
	79476		schwarz black												
	79484		rot red												
F	Keystone Modul Lautsprecher - zum Einbau in Keystone Patchpanel, Dosen und Gehäusen usw. - Kunststoffgehäuse - Anschlüsse: Bananen-Buchse - Material Gehäuse: ABS - Material Kontakte: Kupfer (vergoldet) - Impedanz: 75 Ω - Betriebsspannung: 170 V max. - Kontaktwiderstand: 10 MΩ max. - Spannungsfestigkeit: 500 V RMS - Dauerhaftigkeit Steckverbindung: 500x min. - Vibrationswert: 100 m/s² (10 ~ 500 Hz) - Frequenzbereich: Gleichstrom ~ 1 GHz - Kontaktwiderstand Innenkontakt: ≤ 10 MΩ - Kontaktwiderstand Außenkontakt: ≤ 5 MΩ - Stehwellenverhältnis: gerade: ≤ 1,20; rechter Winkel: ≤ 1,30 - Konformität: REACH, RoHS						Keystone module speaker - for installation in the KeyStone patch panels, sockets, housing and so on - pastic housing - Connectors: Banana female - Material housing: ABS - Material contacts: copper (gold-plated) - Imdepance: 75 Ω - Operation voltage: 170 V max. - Contact resistance: 10 MΩ max. - Withstand voltage: 500 V RMS - Mating durability: 500x min. - Vibration: 100 m/s² (10 ~ 500 Hz) - Frequency range: DC ~ 1 GHz - Contact resistance inner contact: ≤ 10 MΩ - Contact resistance outer contact: ≤ 5 MΩ - Voltage standing wave ratio: straight: ≤ 1.20; right angle: ≤ 1.30 - Conformity: REACH, RoHS								F
G															G
H															H
I															Änderungen
	Datum		Name		gez.:	10.02.2021	ir		NET Keystone terminal, threaded socket, xxx				1/1		
					gepr.:	10.02.2021	aw								
					Norm:					Zeichnungs-Nr.:		von			
J					Änderungen vorbehalten / Subject to change				79476, 79484						J
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	