




P

Paulmann



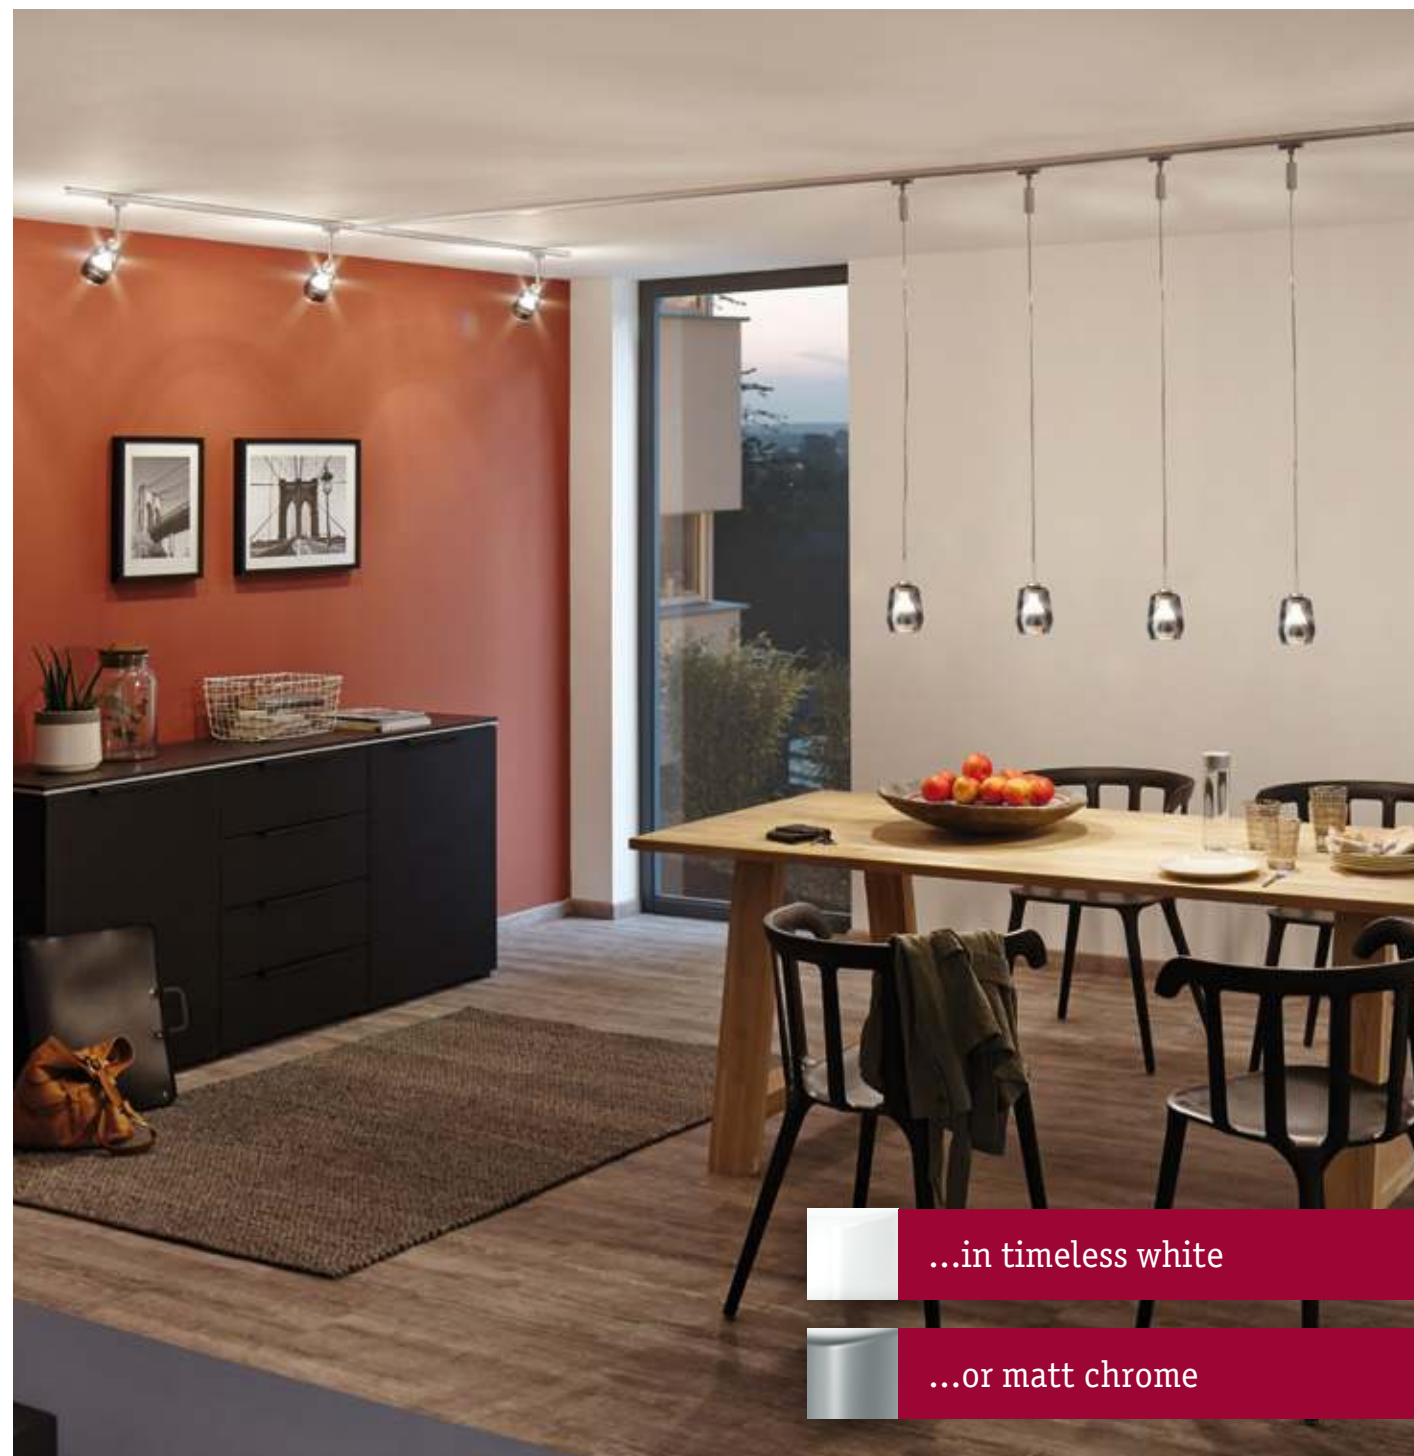

...in timeless white

...or matt chrome

Rail light for the entire home

URail – install spotlights and pendants throughout your home with a light rail

Lighting is more than just physics. Well planned and cleverly used, it can brighten your entire home. It not only improves the feeling of wellbeing in your own home, it also makes everyday life that little bit easier. Take the URail system by Paulmann for example. Whether it be pendant luminaires for your dining table, spots for pictures and shelves or floodlights for entire rooms: The flexible rail system offers a selection of over 100 different high-quality spotlights, floodlights and pendants in a range of designs, materials and colours. You are guaranteed to find the right luminaire for your living space.



Pendant lamps for your living space

...for you to combine!

Low-glare planar light with LED panels



URail spotlights

Dimmable, energy-saving LED included



Spot Dipper A**–A
incl. 2×8 W
2×652 lm, 2.700 K
∠ 83°
230 V
⌀170 ⇄375 ⇄26 mm

CM 954.69



Spot Sabik A**–A
incl. 1×9 / 1×4 W
800 + 390 lm, 2.700 K
230 V
⌀225 ⌀117 ⇄62 mm

CM 949.79

Spot Arena A**–A
incl. 1×15 W
1.180 lm, 2.700 K
∠ 84°
230 V
⌀191 ⇄123 ⇄78 mm

CM 954.46

W 954.47

Spot Aldan A**–A
incl. 1×9 W
820 lm, 2.700 K
∠ 65°
230 V
⌀170 ⌀98 mm

CM 955.19

Spot Cube A**–A
incl. 1×8 W
770 lm, 2.700 K
∠ 65°
230 V
⌀165 ⇄77 ⇄47 mm

CM 955.10

W 955.11



Spot Capsule II A**–A
incl. 1×6 W
420 lm, 2.700 K
∠ 30°
230 V
⌀210 ⇄80 ⇄80 mm

CM 954.55

W 954.56

Spot Double Pellet A**–A
incl. 2×6,7 W
2×294 lm, 2.700 K
∠ 40°
230 V
⌀180 ⇄190 ⇄40 mm

CM 954.71

Spot Pellet A**–A
incl. 1×6,7 W
294 lm, 2.700 K
∠ 40°
230 V
⌀180 ⇄80 ⇄40 mm

CM 954.73

W 954.74

Spot Discus A**–A
incl. 1×5 W
440 lm, 2.700 K
∠ 45°
230 V
⌀215 ⇄29 ⇄95 mm

CM 968.91

Spot Knop A**–A
incl. 1×5 W
440 lm, 2.700 K
∠ 45°
230 V
⌀164 ⇄51 ⇄75 mm

CM 968.92

Wall reading lights

The ideal reading light - individually adjustable thanks to a flexible arm



Wall Spot Discus A**–A

incl. 1×5,5 W
440 lm, 2.700 K
∠ 45°
230 V
⌀95 ⇄410 mm

954.54

URail spotlights

Not dimmable, energy-saving LED included



Spot Wankel A**–A
incl. 1×5,4 W
450 lm, 2.700 K
∠ 35°
230 V
⌀173 ⌀55 ⇄78 mm

CM 952.04

Spot Shine A**–A
incl. 1×5 W
225 lm, 2.700 K
∠ 75°
230 V
⌀180 ⇄59 ⇄90 mm

CM 952.73

W 952.83

Spot Circle A**–A
incl. 1×5 W
308 lm, 2.700 K
∠ 90°
230 V
⌀147 ⇄98 ⇄50 mm

CM 952.71

W 952.72

Spot Pedal A**–A
incl. 1×5 W
395 lm, 2.700 K
∠ 100°
230 V
⌀175 ⇄50 ⇄48 mm

CM 952.69

W 952.70

Spot Hemi A**–A
incl. 1×5 W
530 lm, 3.000 K
230 V
⌀170 ⇄100 ⇄56 mm

CM 955.08

W 955.09

Spot Tubo A**–A
incl. 1×5 W
415 lm, 3.000 K
230 V
⌀196 ⇄42 ⇄105 mm

CM 955.06

W 955.07

LED Inline lighting strip (not dimmable)

Make your rail shine!

The URail LED Inline inserts illuminate rail sections between the spotlights. Choose from three different sizes.



Inline 20 A**–A
incl. 1×2 W
108 lm, 2700 K
230 V
⌀16 ⇄200 ⇄8,5 mm
952.91

Inline 40 A**–A
incl. 1×3,3 W
222 lm, 2700 K
230 V
⌀16 ⇄400 ⇄8,5 mm
952.92

Inline 90 A**–A
incl. 1×5,2 W
501 lm, 2700 K
230 V
⌀16 ⇄900 ⇄8,5 mm
952.93

URail spotlights


Replaceable lamp included



Spot Tube A**–E
incl. 1×6,5 W, GU10, 
425 lm, 2.700 K
230 V
⌀112 ⌀65 mm
CM 952.85
W 952.86



Spot Barelli A**–E
incl. 1×6,5 W, GU10, 
425 lm, 2.700 K
230 V
⌀165 ⌀51 ⇄100 ⇄51 mm
CM 951.54
W 951.55



URail spotlights

Choose the lamp yourself!



Spot Cone A**–E
max. 10 W, GU10
230 V
⌀180 ⌀85 ⇄90 mm
CM 976.13
W 953.62



Spot Pipe A**–E
max. 10 W, GU10
230 V
⌀150 ⌀65 ⇄100 mm
CM 976.12
W 953.63



Spot Pure I A**–E
max. 10 W, GU10
230 V
⌀110 ⇄58 ⇄66 mm
CM 953.29
W 953.30




Spot Barelli A**–E
max. 10 W, GU10
230 V
⌀138 ⇄68 ⇄35 mm
CM 954.61



Spot Cover A**–E
max. 10 W, GU10
230 V
⌀140 ⇄58 ⇄90 mm
CM 953.35
W 953.36



Spot Pure II A**–E
max. 10 W, GU10
230 V
⌀110 ⇄58 ⇄66 mm
CM 953.31
W 953.33





Spot Blossom A**–E
max. 10 W, G9
230 V
⌀128 ⇄74 ⇄115 mm
CM 953.37
W 953.42



Spot Blossom A**–E
max. 10 W, G9
230 V
⌀128 ⇄74 ⇄115 mm
CM 953.38
W 953.43



Spot Blossom A**–E
max. 10 W, G9
230 V
⌀128 ⇄74 ⇄115 mm
CM 953.39
W 953.44



LED Maxiflood
3,5 W GU10 
250 lm, 2.700 K
⌀52 ⌀51 mm
285.36





LED
2 W G9 
200 lm, 2.700 K
⌀48 ⌀14 mm
285.33



LED
7 W GU10 
500 lm, 2.700 K
⋈ 36°-36°, 660 cd
⌀56 ⌀50 mm
285.76



LED
3 W G9 
300 lm, 2.700 K
⌀50 ⌀16 mm
284.46



LED
5,7 W GU10 
350 lm, 2.700 K
⋈ 36°, 650 cd
⌀53 ⌀51 mm
284.34



LED
6,5 W GU10 
445 lm, 2.700 K
⋈ 36°-36°, 700 cd
⌀55 ⌀51 mm
285.62

Starter sets including 3 spots

Unpack and get started!



Starter Set Barelli A**–E
max. 3×10 W, GU10
230 V
⇄1,2 m
CM 954.59



Starter Set Cover A**–E
max. 3×10 W, GU10
230 V
⇄1,2 m
CM 954.62



Starter Set Pure II A**–E
max. 3×10 W, GU10
230 V
⇄1,2 m
CM 954.63

LED floodlight

For wide-coverage, indirect lighting





Bluetooth®
BLE LED Fluter Chronos A**–A
incl. 1×12 W
1.500 lm, 2.700 - 6.500 K
230 V
⌀122 ⇄266 ⇄114 mm
CM 955.05



Spot Blade A**–A
incl. 1×14,4 W
1.240 lm, 2.700 K
230 V
⌀256 ⇄400 ⇄55 mm
CM 954.34

LED panel

Planar light – right where you need it!

The innovative URail LED panels provide low-glare planar light, which is all the rage right now. They can be installed both on the wall and on the ceiling and they provide the same sort of light as you would expect from a small window.



Panel Loop A++-A
incl. 1x7 W
812 lm, 2.700 K
230 V
⌀35 ⇄380 ⌀110 mm

CM 953.19
W 953.20



Panel Ring A++-A
incl. 1x7 W
812 lm, 2.700 K
230 V
ø220 ⌀30 mm

CM 953.15
W 953.16



Panel Double A++-A
incl. 1x8 W
695 lm, 2.700 K
230 V
⌀30 ⇄288 ⌀127 mm

CM 953.09



Ceiling luminaires

Choose the lamp yourself!




Ceiling Globe Small A++-E
max. 10 W, E14
230 V
⌀320 ø200 mm

CM 976.02

Ceiling Socket A++-E
max. 20 W, E27
230 V
⌀96 ø55 mm

CM 952.00



LED included



Safira A++-A
incl. 1x5,2 W
400 lm, 2.700 K
230 V
⌀136 ø80 ⇄80 mm


CM 955.01

Topa A++-A
incl. 1x5,2 W
400 lm, 2.700 K
230 V
⌀73 ø80 ⇄80 mm

CM 955.02

LED complete pendant

Includes LED – the perfect light over the couch table or a grand dinner table



Pendulum Aldan A++-A
incl. 1x8,5 / 1x4,5 W
880 + 480 lm, 2.700 K
230 V
⌀85 mm ⌀20-150 cm
ø98 mm

CM 955.20



LED Pendulum Barrel A++-A
incl. 1x6 W
370 lm, 2.700 K
★ 106°, 139 cd
230 V
⌀135 cm ø85 mm

CM 951.77


Pendulum Capsule II A++-A
incl. 1x6 W
420 lm, 2.700 K
230 V
⌀130 cm ø87 mm

CM 954.57

W 954.58

Pendant luminaires

Choose the lamp yourself!



Arido II A++-E
incl. 1x5 W, GU10, <A>
560 lm, 2.700 K
230 V
⌀200 mm ⌀158 cm
ø110 mm

CM 949.98

☞ Chrome matt/Clear/
Satin ☒ Glass/Metal

Remo II A++-E
max. 25 W, GU10
230 V
⌀200 mm ⌀158 cm
ø125 mm

CM 949.99

☞ Chrome matt/Satin
☒ Glass/Metal

Pendulum Sarrasani A++-E
max. 10 W, GU10
230 V
⌀135 cm ø140 mm

CM 954.51

☞ Chrome matt/
Dichroic ☒ Metal/
Glass

Pendulum Sarrasani A++-E
max. 20 W, GZ10 / GU10
230 V
⌀135 cm ø140 mm

CM 954.50

W 954.90

☞ Chrome matt/Opal
☒ Metal/Glass


2Easy pendant

Create your own combination
Basic pendant, lamp and shade!



2Easy Basic Pendulum A++-E
max. 20 W, E27
230 V
⌀150 cm

CM 954.36
W 954.37



Vento
⌀280 ⌀170 mm
953.51

Clear Glass



Vento
⌀280 ⌀170 mm
953.54

Opal Glass



Drio
⌀280 ⌀152 mm
953.52

Smoke glass Glass



Vico
⌀280 ⌀150 mm
953.53

Satin Glass



Tessa
max. 50 W
⌀260 ⌀454 mm
953.66

White Fabric



Tessa
max. 50 W
⌀260 ⌀454 mm
954.65

Light grey Fabric



Tessa
max. 50 W
⌀260 ⌀454 mm
954.66

Cream Fabric



Tessa
max. 50 W
⌀260 ⌀454 mm
954.67

Caramel Fabric



Tessa
max. 50 W
⌀260 ⌀454 mm
954.68

Dark brown Fabric



Shade Pom
max. 20 W
⌀240 ⌀350 mm
954.38

Matt white Metal



Shade Pirm
max. 20 W
⌀230 ⌀280 mm
954.40

Grey matt Metal



Shade Pien
max. 20 W
⌀230 ⌀250 mm
954.43

Pink matt Metal



Shade Pien
max. 20 W
⌀230 ⌀250 mm
954.42

Beige matt Metal



2Easy Diffusor
max. 20 W
⌀454 mm
954.92

Satin Plastic



2Easy Alari
max. 20 W
⌀300 mm
954.44

Opal Glass



2Easy Alari
max. 20 W
⌀300 mm
954.45

Satin/Clear Glass



LED Deco Pipe
6 W E27 A+
520 lm, 2.700 K
⌀142 ⌀38 mm
284.36



LED AGL
7,5 W E27 A+
806 lm, 2.700 K
⌀104 ⌀60 mm
285.75




LED Rustika (ST64)
7,5 W E27 A
385 lm, 2.200 K
⌀142 ⌀64 mm
286.07



LED Rustika (ST64)
7,5 W E27 A
806 lm, 2.700 K
⌀140 ⌀64 mm
284.25

DecoSystems
LED spots/pendants

Create your own combination
Basic spot or pendant and shade!



Basic-Spot A++-E		Basic-Pendulum A++-E	
incl. 1x3,5 W, GZ10		incl. 1x3,5 W, GZ10	
250 lm, 2.700 K		250 lm, 2.700 K	
230 V		230 V	
125 ø51 50 mm		135 cm	
951.82	951.86	951.83	951.85



Wolbi	Vento	Twice	Vento	Wolbi	Quad
max. 50 W	max. 50 W	max. 50 W	max. 50 W	max. 50 W	max. 50 W
80 ø90 mm	95 ø80 mm	70 ø100 mm	95 ø80 mm	70 ø90 mm	80 ø75 mm
600.11	953.59	701.74	953.58	600.55	600.15
Dichroic Glass	Smoke glass Glass	Clear/Opaque Glass	Satin Glass	Opal Glass	White Glass



Kegi	Wolbi	Turno	Zyli	Rado
max. 50 W	max. 50 W	max. 50 W	max. 50 W	max. 50 W
80 ø110 mm	80 ø90 mm	90 ø80 mm	80 ø70 mm	95 ø70 mm
600.12	600.07	953.56	600.04	953.55
White Glass	White Glass	Satin Glass	White Glass	Clear Glass



Tessa	Tessa	Tessa	Tessa	Tessa	Tessa
max. 50 W	max. 50 W	max. 50 W	max. 50 W	max. 50 W	max. 50 W
152 ø255 mm	152 ø255 mm	152 ø255 mm	152 ø255 mm	152 ø255 mm	152 ø255 mm
603.24	603.25	603.26	603.27	603.52	603.51
Blue Fabric	Yellow Fabric	White Fabric	Apricot Fabric	Light grey Fabric	Cream Fabric



Tessa	Tessa	DecoSystems Diffusor
max. 50 W	max. 50 W	max. 20 W
152 ø255 mm	152 ø255 mm	1,5 ø255 mm
603.50	603.49	954.93
Caramel Fabric	Dark brown Fabric	Satin Plastic



Pendant accessories

Pendant adapter, can be shortened
 135 ø26 mm
 974.74

Universal Pendant Adapter
230 V
 106 ø62 mm
 954.94
 954.95

The URail pendant can be shortened without the use of tools
max. 1 m ø6 mm

Simply connect pendants without a URail connector to the rail.
ø7 mm
max. 3 kg

Starter sets

Matches all pendants and spots



URail Basicsystem A++-E
max. 1.000 W
230 V
 3,1 m
 950.16



URail Planning Aid

The easy way to your personal rail system

Feeling inspired? Then use this planning aid. You can add your chosen URail products to the easy-to-use shopping list on page 18. On page 19 you will find a grid where you can plan your individual rail sections.

Step 1: Choose rails



1  **Track**
max. 1000W, 230V
Ø18 Ø18 mm

	Ø0,1 m	Ø0,5 m	Ø1 m	Ø2 m
CM	950.86	968.54	968.33	968.34
W	954.98	976.82	976.83	976.84

2  **Universal Endcap**
Ø18 Ø13 Ø21 mm
CM 954.96
W 954.97

3  **Safety Cover strip**
Ø10 mm Ø0,68 m
951.26

4  **Suspension**
Ø105 Ø23 mm
CM 975.99

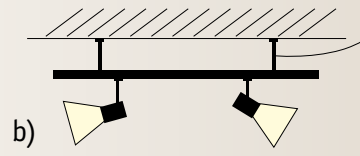a)  b) 

Step 2: Choose a centre, end or cable power infeed

5  **Middle/terminal feed**
max. 1.000W
230V
Ø27 Ø205 Ø45 mm
CM 968.85
W 968.86

6  **Middle/terminal feed**
max. 1.000W
230V
Ø30 mm Ø75 mm
Ø165 mm Ø0,5 m
CM 968.31


7  **Terminal feed**
max. 1.000W
230V
Ø18 Ø161 Ø18 mm
CM 976.55


8  **Middle-Feed**
max. 1.000/1.000W
230V
Ø18 Ø304 Ø18 mm
CM 977.65
W 977.66


URail centre power infeed
3-/4-/5-wire, individually switchable.
In an unobtrusive rail format.

9  **Motion Sensor**
max. 500W
230V
Ø34 Ø235 Ø56 mm
CM 953.17


- Input with motion sensor for URail rail for installing at the ceiling or wall outlet
- Dusk sensor with infinitely adjustable brightness and on-time of 1-30 minutes
- Detects even the smallest of movements and keeps the light on permanently


 **Dusk sensor** – the light switches on when it gets dark outside.

 **Energy-saving** – if no one is in the room, the light stays off.


 **The light remains on**, even when there is very little movement.

... Choose a connector


10  **Flex Connector II**
max. 1000W
Ø18 Ø127 Ø18 mm
CM 953.25
W 953.26

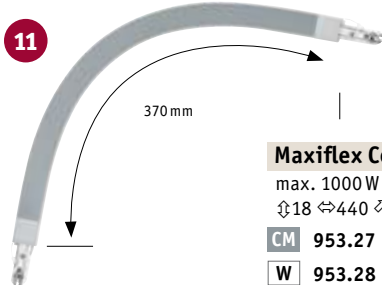
11  **Maxiflex Connector**
max. 1000W
Ø18 Ø440 Ø18 mm
CM 953.27
W 953.28

12  **Line Connector**
Ø15 Ø70 Ø11 mm
951.36

13  **L-Connector**
Ø18 Ø62 Ø62 mm
CM 976.48
W 976.49

14  **T-Connector**
Ø18 Ø104 Ø62 mm
CM 976.56
W 976.86

15  **X-Connector**
Ø18 Ø104 Ø104 mm
CM 976.57
W 976.87

16  **Power isolating link**
Ø18 Ø70 Ø18 mm
951.40

LED connector luminaires

Dimmable

 **LED End Cap** A**–A
incl. 1x5,8W
501lm, 2.700 K
Ø 80°
230V
Ø27 Ø141 Ø57 mm
CM 954.79
W 954.80

 **LED Line Connector** A**–A
incl. 1x5,8W
501lm, 2.700 K
Ø 80°
230V
Ø27 Ø189 Ø57 mm
CM 954.77
W 954.78

 **LED L-Connector** A**–A
incl. 1x5,8W
501lm, 2.700 K
Ø 80°
230V
Ø27 Ø141 Ø141 mm
CM 954.85
W 954.86

 **LED T-Connector** A**–A
incl. 1x5,8W
501lm, 2.700 K
Ø 80°
230V
Ø27 Ø224 Ø141 mm
CM 954.83

 **LED Y-Connector** A**–A
incl. 1x5,8W
501lm, 2.700 K
Ø 80°
230V
Ø27 Ø223 Ø195 mm
CM 954.81

Smart control



17 zigbee



URail Dimm/Switch Adapter Zigbee

max. 400 W
230 V
Ø35 Ø155 Ø56 mm

CM 500.50
W 500.51

For the switching and dimming of downstream rail sections in Smart Home systems



ZB Spot Adapter

max. 50 W
230 V
Ø50 Ø166 Ø20 mm

CM 968.93

For the switching and dimming of individual spots or groups of spots



Gent Remote Control

230 V
Ø18 Ø55 Ø138 mm
500.67

Directly controls all luminaires downstream of the Zigbee dimmer switch, without Gateway or app



Ready for

- Amazon Alexa Echo Plus
- Philips Hue Bridge 2 (except: Hue Entertainment)
- Smart Friends
- Osram Lightify
- AIO Mediola Gateway V5 Plus
- Ubisys Gateway G1



Infos:

www.paulmann.com/zb



IR Rail-Switch

max. 500 W
230 V
Ø18 Ø240 Ø18 mm

CM 976.53
W 976.54



- Minimum load 3 W - suitable for LEDs and halogen
- Switches and dims the downstream sections



IR Remote Control

Ø7 Ø40 Ø85 mm
950.73

- Remote control for the convenient switching or dimming of URail systems
- The connector-integrated receiver controls all downstream system sections
- The four function buttons on the remote control can be used to control two separate circuits or two dimming processes



Wireless Adapter

max. 50 W
230 V
Ø50 Ø166 Ø19 mm

CM 952.94

- Allows the control of single heads and group switching functions to create various lighting scenarios (just like in a two-phase rail system)



Remote for Wireless Adapter

952.96

- All groups can be switched by remote control
- Max. 50 W per adapter, also suitable for halogen lamps



Step 3: Choose spotlights, floodlights and pendants

Now all you need is the spotlights, floodlights or pendants of your choice, which can be found on the previous pages.



Your personal shopping list

1 Track 0,1m

CM

950.86

x

W

954.98

x

Track 0,5 m

CM

968.54

x

W

976.82

x

Track 1,0 m

CM

968.33

x

W

976.83

x

Track 2,0 m

CM

968.34

x

W

976.84

x

2 Universal Endcap

CM

954.96

x

W

954.97

x

3 Safety Cover strip

951.26

x

4 Suspension

CM

975.99

x

W

976.88

x

5 Middle/terminal feed

CM

968.85

x

W

968.86

x

6 Middle/terminal feed

CM

968.31

x

W

976.79

x

7 Terminal feed

CM

976.55

x

W

976.85

x

8 Middle-Feed

CM

977.65

x

W

977.66

x

9 Motion Sensor

CM

953.17

x

W

953.18

x

10 Flex Connector II

CM

953.25

x

W

953.26

x

11 Maxiflex Connector

CM

953.27

x

W

953.28

x

12 Line Connector

CM

951.36

x

13 L-Connector

CM

976.48

x

W

976.49

x

14 T-Connector

CM

976.56

x

W

976.86

x

15 X-Connector

CM

976.57

x

W

976.87

x

16 Power isolating link

CM

951.40

x

17 Adapter Zigbee

CM

500.50

x

W

500.51

x

18 ZB Spot Adapter

CM

968.93

x

19 Gent Remote Control

500.67

x

20 IR Rail-Switch

CM

976.53

x

W

976.54

x

21 IR Rail switch remote control

950.73

x

22 Wireless Adapter

CM

952.94

x

W



952.95

x

23 Remote for Wireless Adapter

952.96

x

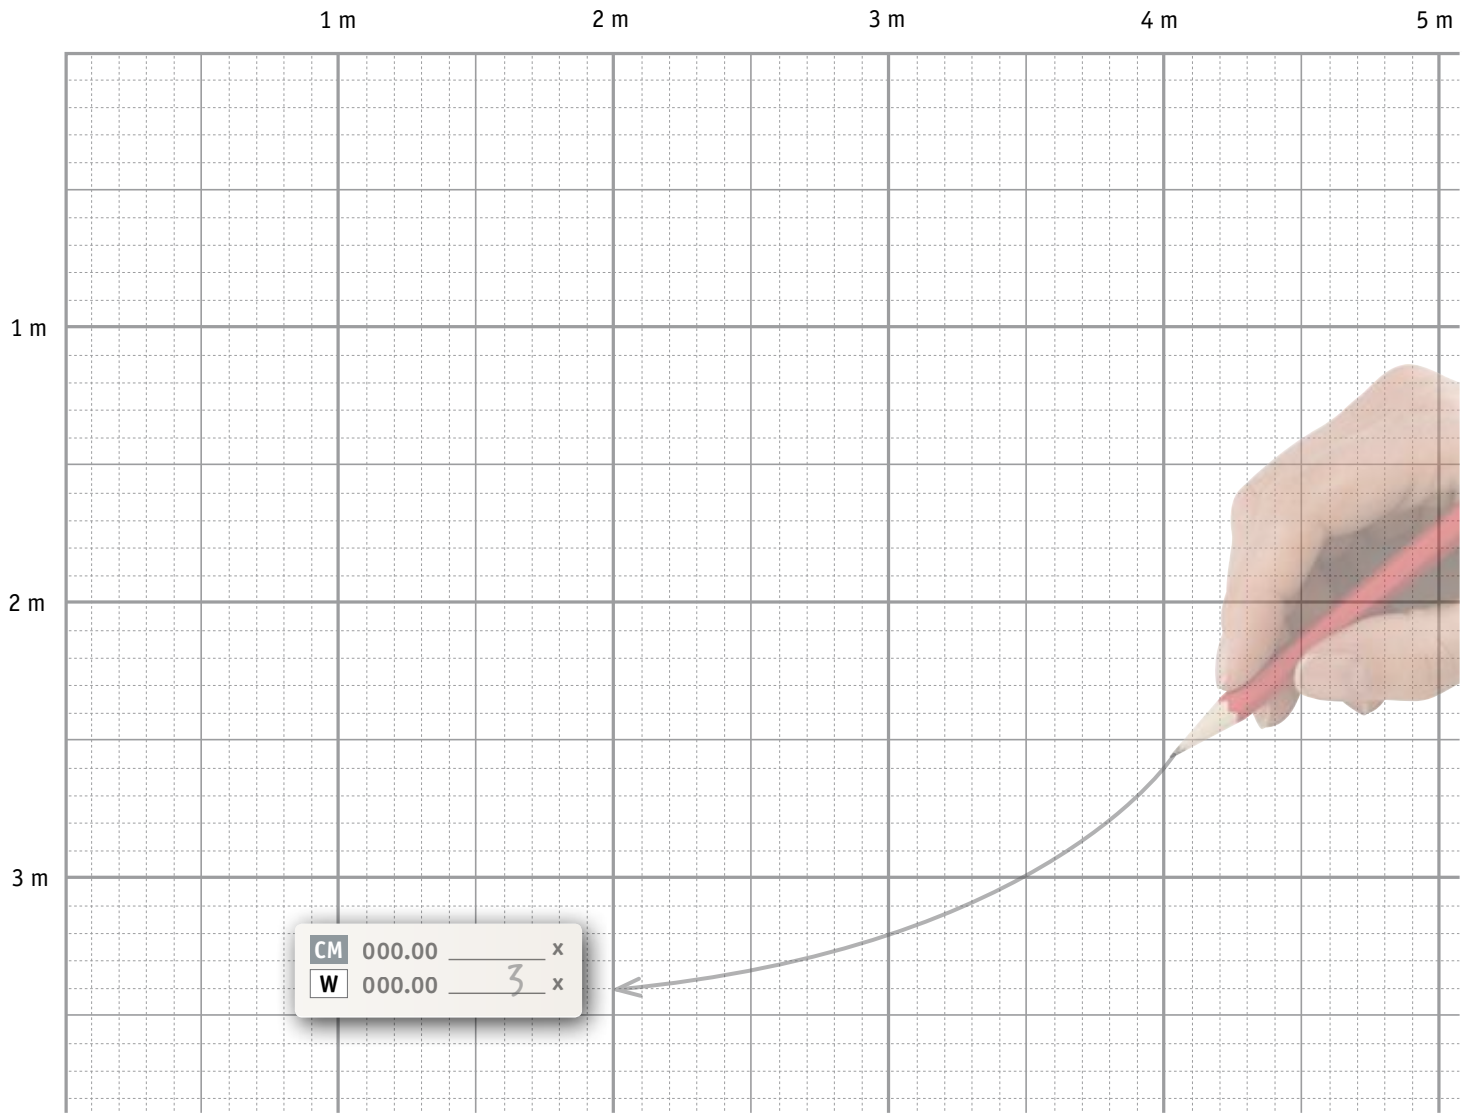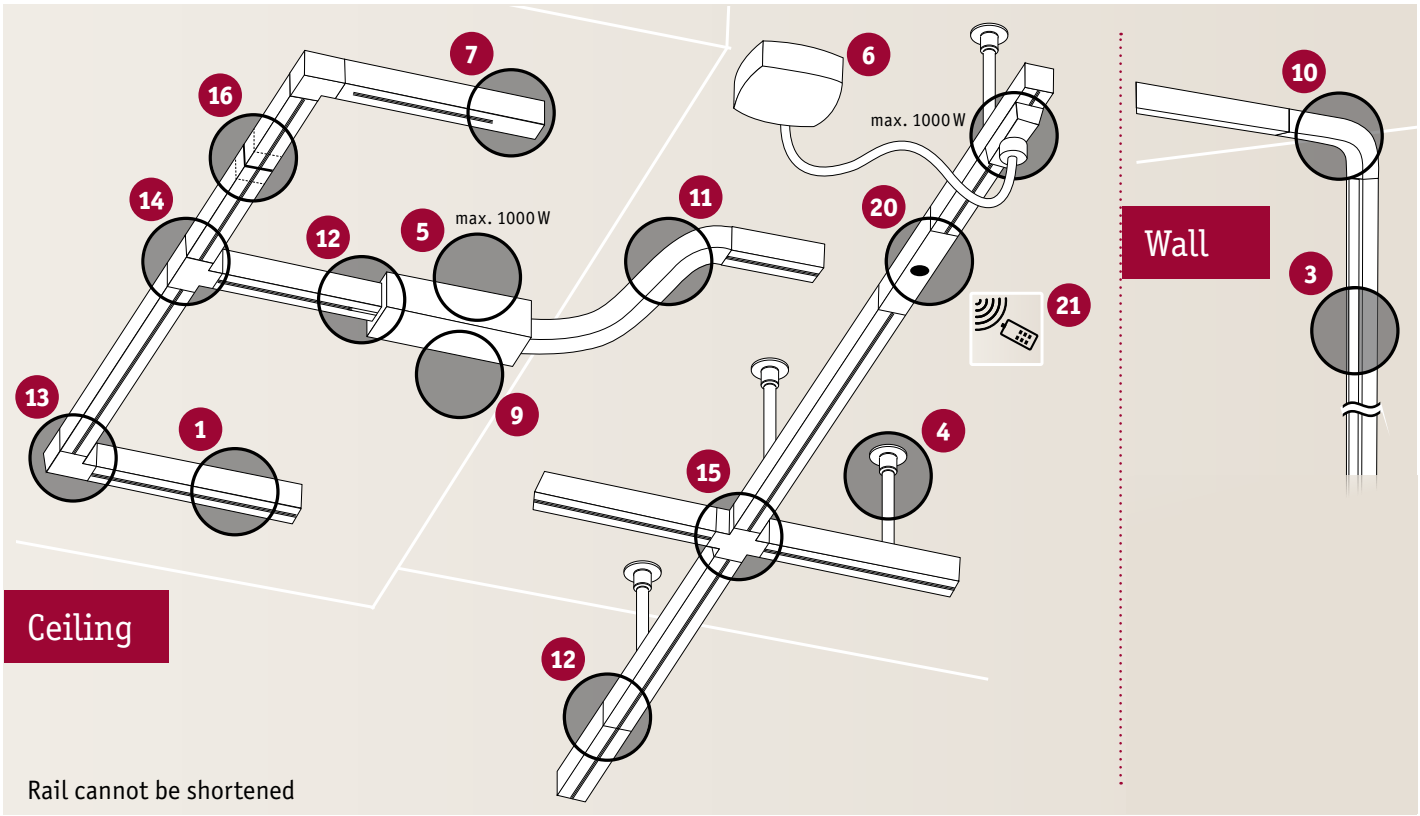

URail

Install LED spotlights and pendants throughout your home

Introduce various forms of lighting to your home using just a single power supply. Provide the different areas of a room with their own unique atmosphere whilst maintaining a harmonious overall impression. You can connect up to ten rail elements to the power supply at a capacity of up to 1000 watts. URail is a high-voltage system (230 V) and therefore does not require a transformer as it is connected directly to the mains. Spotlights and pendants are easy to move on the rails – perfect for staging big dinner parties.

Depending on the height of your ceiling, you can choose between two types of installation: the rails can be mounted on spacers or directly on the ceiling.



5 Jahre Year Ans
Jaar Años Annos
Garantie



WORLD OF LIGHT with Anita & Jens



Visit us at YouTube!

In Paulmann's World of Light, we use short videos to show you how to light up your home.

www.youtube.com/PaulmannLicht



Light planning
with URail




URail assembly

www.paulmann.com

Paulmann Licht GmbH | Quezinger Feld 2 | 31832 Springe / Germany


The energy efficiency class label appears as follows:



① This luminaire is suitable for lamps with energy classes A++–E.

Example


Arctus A++–E
max. 60 W, E27
230 V
Ø80 Ø275 mm
EAN 4000870 703458
703.45



① This luminaire is suitable for lamps with energy classes A++–E.
② This luminaire comes with a class A lamp.

Example

Futura A++–E
incl. 2x3,5 W, GU10, <A
230 V
Ø150 Ø275 Ø80 mm
EAN 4000870 601792
601.79



① This luminaire contains built-in LED lamps.
② The lamps in the luminaire cannot be replaced.

Example

Orbit A++–A
incl. 1x18,5 W
1100 lm, 3000 K
230 V Ø360 Ø57 mm
EAN 4000870 703908
703.90



③ Lamp energy efficiency class: A

Example

LED
2,2 W G9 <A
Ø15 Ø50 mm
200 lm
2700 K
284.38