
elements MIDI(MD040)

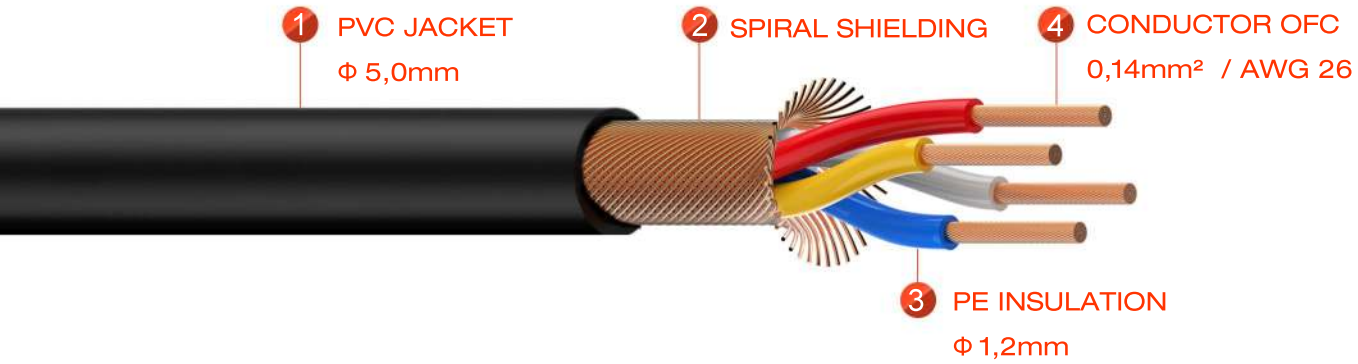

TECHNICAL DATA:

Jacket,diameter	PVC Φ 5,0mm
AWG	26
No. of inner conductors	4×0.14mm²
Copper strand per conductor	18×0,10mm
Condutor insulation	PE Φ 1,20mm
Shielding	copper spiral shielding with 64×0,10mm
Shielding factor	95%
Temperature range	min. -20℃
Temperature range	max. +70℃

ELECTRICAL DATA:

Cond. resistance per 1 km	122 Ω
Capac. cond./cond.per 1 m	37 pF
Capac. cond./shield.per 1 m	69 pF