
elements MIC 2(AC010)

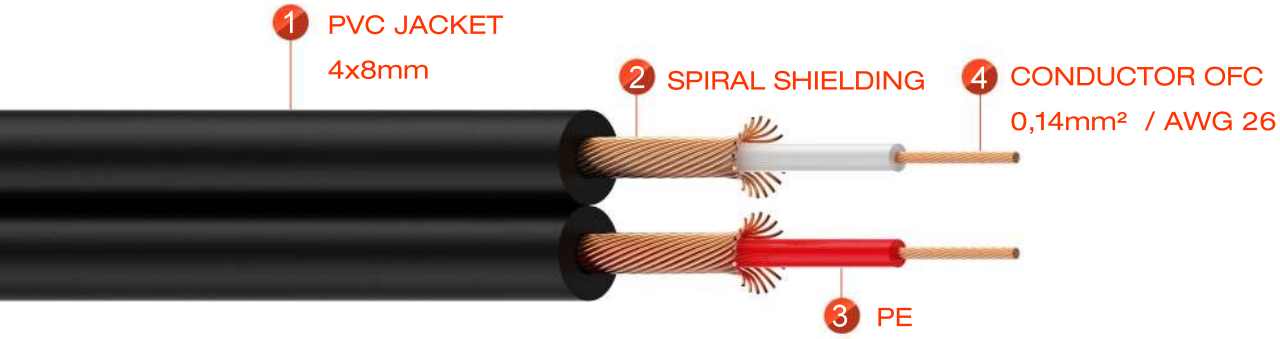

TECHNICAL DATA:

Jacket,diameter	PVC 4x8mm
AWG	26
No. of inner conductors	2×1x0,14mm²
Copper strand per conductor	18×0,10mm
Condutor insulation	PE
Shielding	copper spiral shielding
Shielding factor	90%
Temperature range	min. -20℃
Temperature range	max. +70℃

ELECTRICAL DATA:

Capac. cond./cond.per 1 m	250 pF
Cond. resistance per 1 km	125 Ω
Insulation resist.per 1 km	>1 GΩ