

DATASHEET

FTTH Module for FTTH-BGT, 12 Port LC with OM3 ceramic adapter



General data

Suitable for 1U and 3U subrack FTTH-BGT-xHE

Pre-equipped with 6 LC-Duplex adapter in single mode, multimode OM4 or multimode OM3 with ceramic ferrule

Inclined outlet left/right for the 1HE version, top/bottom outlet for the 3HE version

Cable entry via MTP®/MPO adapter

Splice cassette (Shrink -and Crimp protection) holder included in cassette for MTP®/ MPO free installation

Delivery without Pigtail and MTP®/MPO adapter

On request, the modules can also be equipped with E2000 adapters and pigtails.

Technical properties

Number of height units	0.5 U
With Pigtail	False

This datasheet was created automatically on 16-04-2026 . Technical changes reserved.


DATASHEET

FTTH Module for FTTH-BGT, 12 Port LC with OM3 ceramic adapter

Available variants

ArtNr.	Bezeichnung	APC version	Adapter Colour	Modules	Adapter	Quantity adapter
FTTH-MODUL-LCAPC	FTTH Module for FTTH-BGT, 12 Port LC/APC with OS2 ceramic adapter	True	green	Singlemode	LC duplex	6
FTTH-MODUL-LCOS2	FTTH Module for FTTH-BGT, 12 Port LC with OS2 ceramic adapter	False	blue	Singlemode	LC duplex	6
FTTH-MODUL-LCOM4	FTTH Module for FTTH-BGT, 12 Port LC with OM4 ceramic adapter	False	erica-violet	Multimode OM4	LC duplex	6
FTTH-MODUL-LCOM3	FTTH Module for FTTH-BGT, 12 Port LC with OM3 ceramic adapter	False	aqua	Multimode OM3	LC duplex	6

Drawings

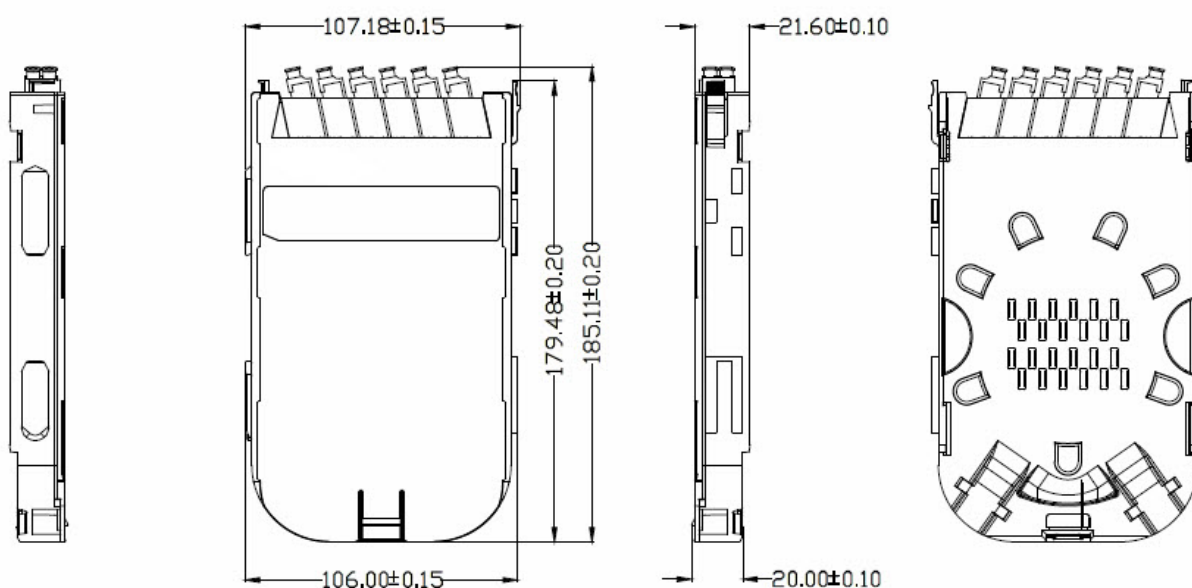

This datasheet was created automatically on 16-04-2026 . Technical changes reserved.