
SILVYN® KLICK-S

SILVYN® KLICK-S - protective conduit holder for SILVYN® RILL

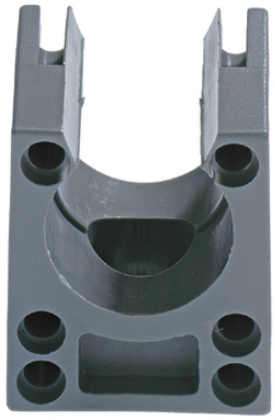

Benefits
Fast assembly
Easy to disassemble
Tear-resistant connection
No sag in the conduit

Application range
In combination with protective cable conduit
SILVYN® RILL PA 6
SILVYN® RILL PA 12
Fastening of conduits on machine walls for all applications

Product features
Impact-resistant polyamide

Design
Multi-part conduit holder with M5 borehole for fixation

Technical Data

Classification:	ETIM 5.0 Class-ID: EC001171 ETIM 5.0 Class-Description: Holder for protective conduits
Colour delivered:	Grey RAL 7001 Black RAL 9005, UV-resistant
Material:	PA6
Temperature range:	-30 °C to +70 °C

Note
Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

©2017 Lapp Group - Technical changes reserved

LAPP GROUP

PRODUCT INFORMATION

SILVYN® KLICK-S

Article number	Nominal size	For conduit with outer Ø (mm)
SILVYN® KLICK-S grey		
61811110	10	10
61811120	13	13
61811130	16	15.8
61811190	18	18.5
61811140	21	21.2
61811150	28	28.5
61811160	34	34.5
61811170	42	42.5
61811180	54	54.5
SILVYN® KLICK-S black		
61811115	10/13	10
61811125	13	13
61811135	16	15.8
61811195	18	18.5
61811145	21	21.2
61811155	28	28.5
61811165	34	34.5
61811175	42	42.5
61811185	54	54.5

Last Update (06.06.2017)
©2017 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16