



REVISION			
REV	DATE	DESCRIPTION	APPRO.BY



BLACK	
EFB NO:	Length
K5248SW.0.5V2	500±10mm
K5248SW.1V2	1000±20mm
K5248SW.1.5V2	1500±30mm
K5248SW.1.8V2	1800±30mm
K5248SW.3V2	3000±50mm
K5248SW.5V2	5000±100mm

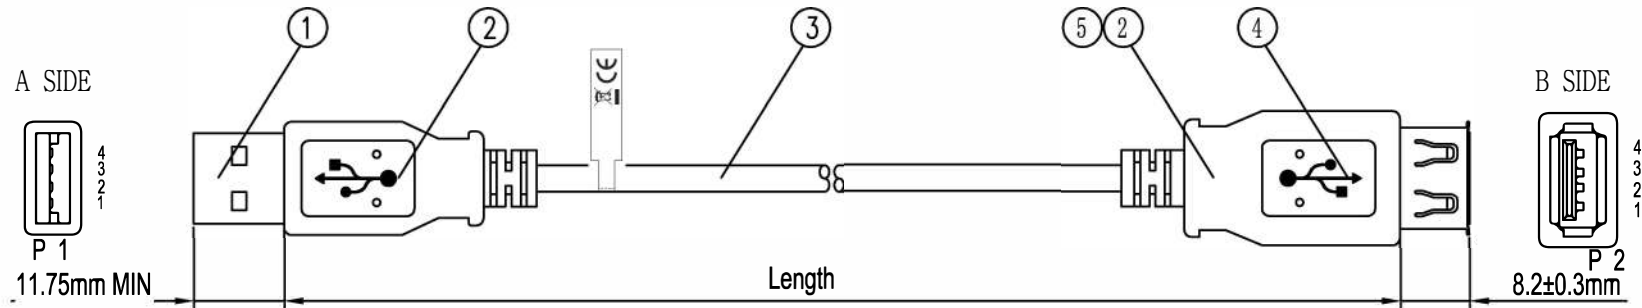

LABEL:

NOTE:

1.Electrical test:

- (1).100% open short & miss wire test;
- (2).Insulation resistance: DC 200V 10MΩ MIN;
- (3).dielectric strength: 500VAC/60s
- (4).mating cycles: 1500 max.
- (5).Contact resistance: 30mOhm;
- (6).Temperature range: -20° C to +60° C;

2.RoHS COMPLIANT

3.PRINTING: USB2.0 HIGH SPEED CABLE 28AWG×1P 24AWG×2C
www.efb-elektronik.de CE

⑤	INNERMOLD	LD-PE	1
④	CONNECTOR	USB A/F TYPE, 1u" GOLD PLATED PIN,WHITE INSULATOR,NICKEL PLATED SHELL	1
③	CABLE	28AWG TXR*1P+24AWG TXR*2C+AL+B(0.12mm/4*16 AL-MG)+DRAIN USB2.0 HIGH SPEED CABLE JACKET PVC BLACK OD=4.5±0.2mm	1
②	OVERMOLD	PVC COLOR:BLACK	2
①	CONNECTOR	USB A/M TYPE,1u" GOLD PLATED PIN,WHITE INSULATOR ,NICKEL PLATED SHELL	1
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K5248SW.xV2	CUSTOMER		EFB
DRAWING			TITLE		USB CABLE
UNIT	mm	SCALE	1:1	REV	A/0
DRAWN BY		CHECK BY	APPRO BY		DATE
Zhouqinghua					2021-05-18

