



## Quick Installation Guide


Elo Pay Z30 'Tap to Pay'

Revision A  
P/N E073200

[www.elotouch.com](http://www.elotouch.com)

# Elo Pay Z30 'Tap to Pay'

## Box Contents

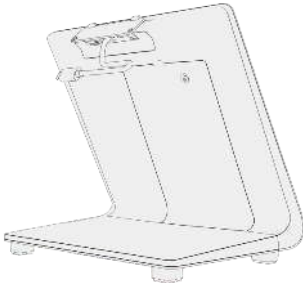

Elo Pay Z30 'Tap to Pay'



M4x8, Flat-HEAD, SCREW  
Qty. 1




M4x6, Flat-HEAD, SCREW  
Qty. 2



Power Cord EU  
Qty.1




Power Cable US  
Qty.1



150W DC Power Adapter  
Qty.1



Mounting Bracket  
Qty.1  
(with pre-attached VHB Qty.2)




Tie-wrap Qty.2

## Installation to a Display


### Step 1:

Elo Pay Z30 'Tap to Pay' supports the Android I-Series 5 Slate display (sold separately). Remove the screw and cable lock bracket from the rear of the display. Retain the screw and bracket for reinstallation in Step 5.

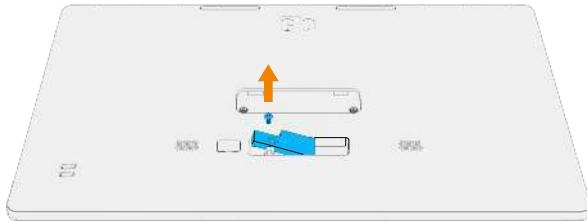

### Step 2:

Insert the two tabs of the hinge into the two slots in the mounting area of the Z-hinge pocket.

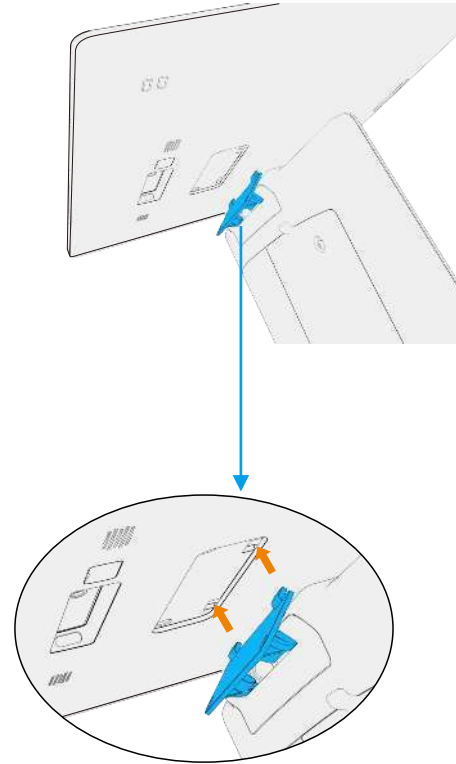


### Step 3:

Fasten the display using included M4x6mm flat-head screws.




### Step 4:

Connect the USB-C cable located in the hinge of the stand to the Slate display.

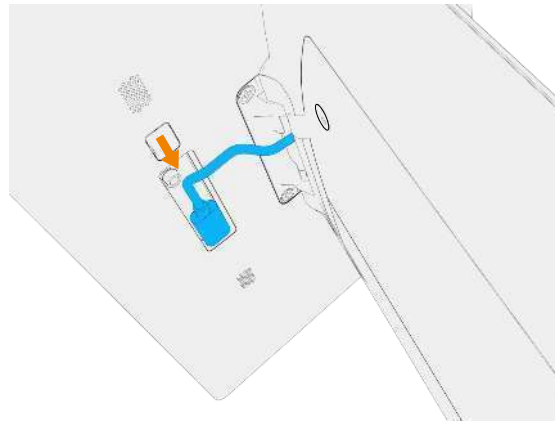


### Step 5:

Re-install the cable lock bracket and screw from Step 1.

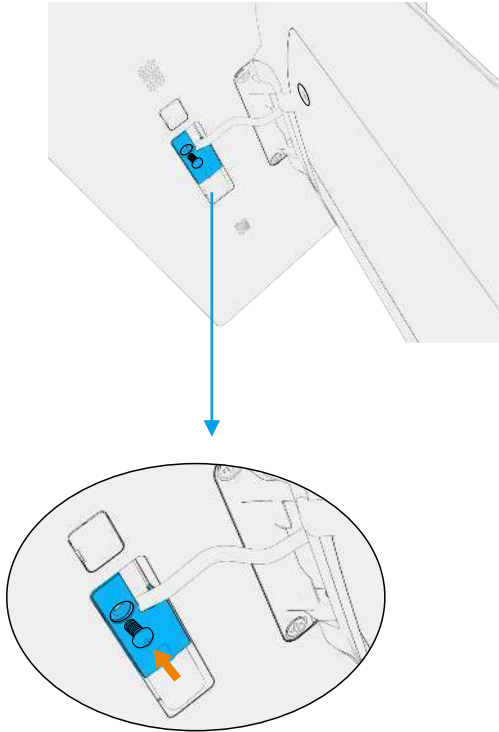

### Step 6:


Complete the assembly and rotate the display as shown.

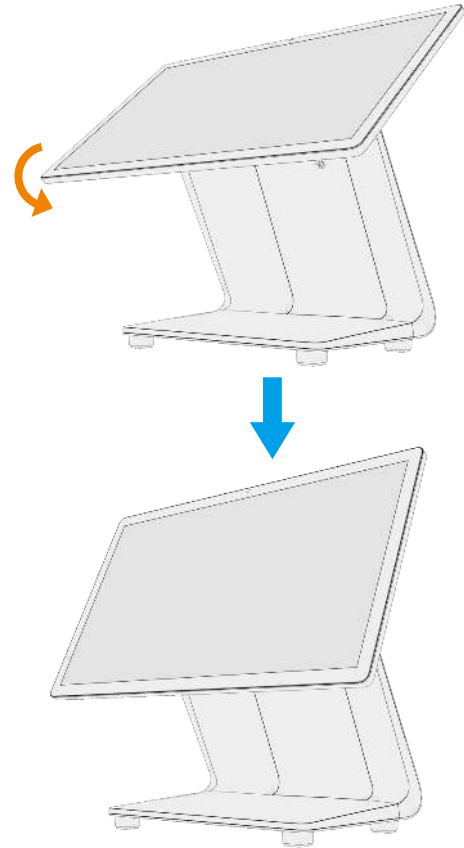

## Cable Management


### Step 1:

Loosen the screw and remove the cable cover door on the base to access the I/O connections.

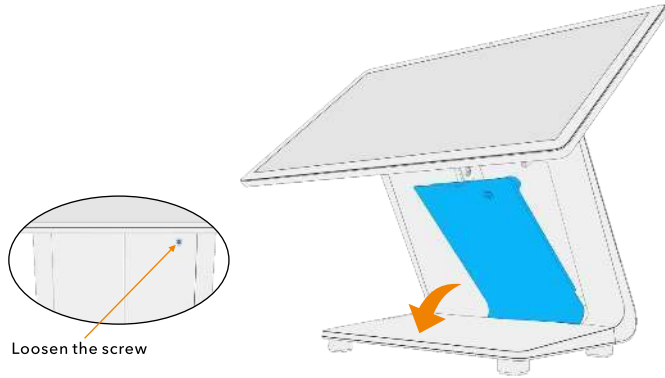


### Step 2:

Connect the power, LAN and external device to the base, and pass the cables through the hole at the bottom of the stand.

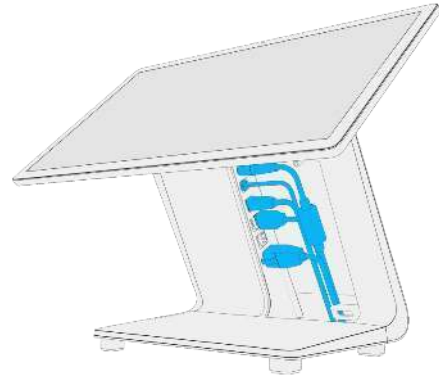


### Step 3:

Make sure all cables route through the plastic clip at the bottom. At this stage, secure the cables to the plastic clip with a tie-wrap.

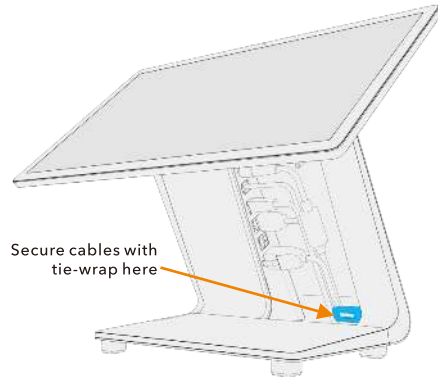

### Step 4:


Re-install the cable cover door of the base and secure the screw to complete the installation.

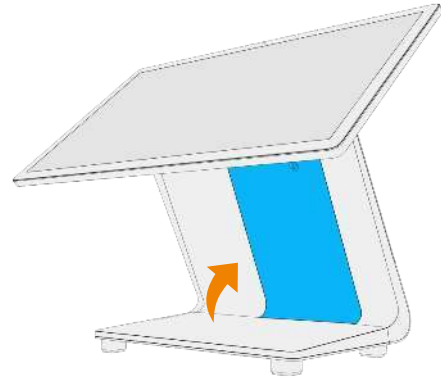


## Attaching the Stand to a Countertop(Optional)

### Step 1:

There are two methods to secure the mounting bracket to the countertop.

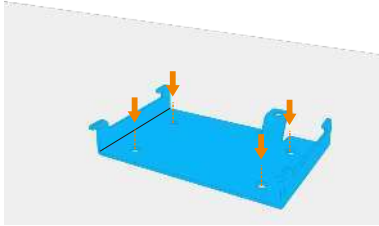


Option1: Secure with screws of the appropriate type and length. Elo suggests M4 or #10 screw diameter.

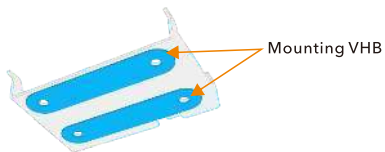

Option2: Use the included mounting VHB.


### Step 2:

Lower the base onto the bracket and slide it back ensuring the bracket hooks engage the openings on the bottom side.

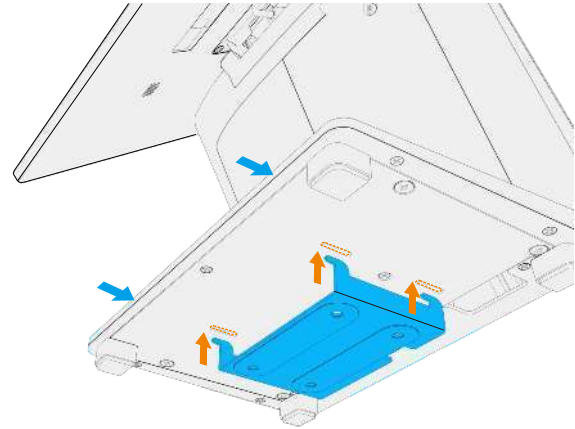


### Step 3:

Loosen the screw and remove the cable cover door. Then secure the base to the bracket using the M4x8mm screw included in the accessory box.

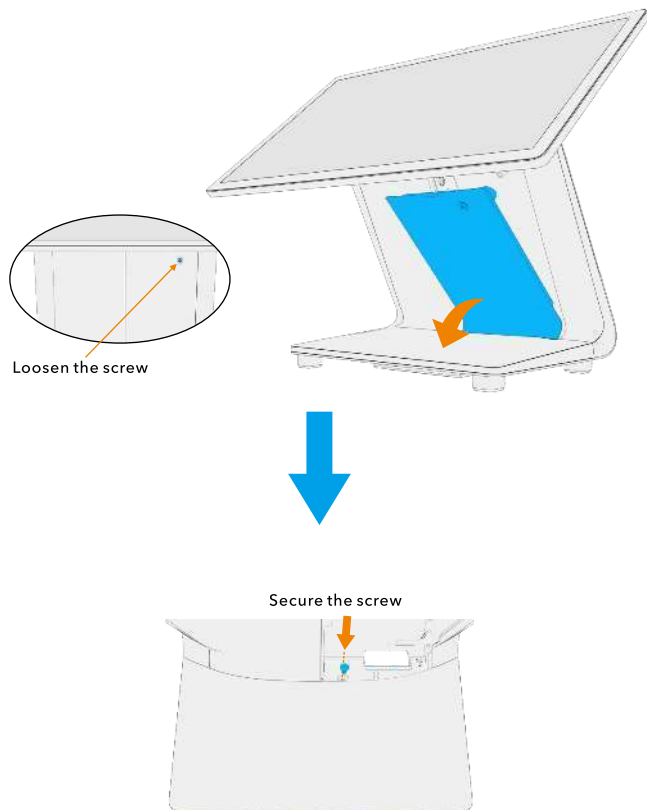

### Step 4:

Re-install the cable cover door of the base and secure the screw. The base mesa is fixed and the installation is completed.

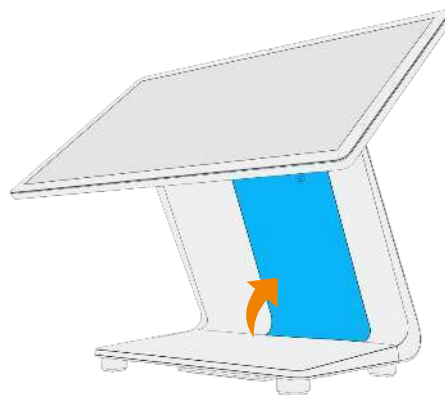

Learn more about Elo at [EloTouch.com](https://www.elotouch.com)

### America

Tel +1 408 597 8000

EloSales.NA@elotouch.com

### Asia-Pacific

Tel +86 (21) 3329 1385

EloAsia@elotouch.com

### Europe(EMEA)

Tel +32 (0)16 930 136

EMEA.Sales@elotouch.com

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively “Elo”) makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo and the Elo logo are either trademarks or registered trademarks of Elo Touch Solutions, Inc.

