support.eu@equip-info.net
support.asia@equip-info.net


Quick Installation Guide

245526 2-Port 20W USB-C PD Charger

245536 2-Port 20W USB-C PD Charger, 25pcs/pack




EN Simple Plug and Play installation
FR Simple installation Plug and Play
DE Einfache Plug-and-Play-Installation
IT Semplice installazione Plug and Play
PT Instalação simples por Plug and Play
ES Sencilla instalación Plug and Play

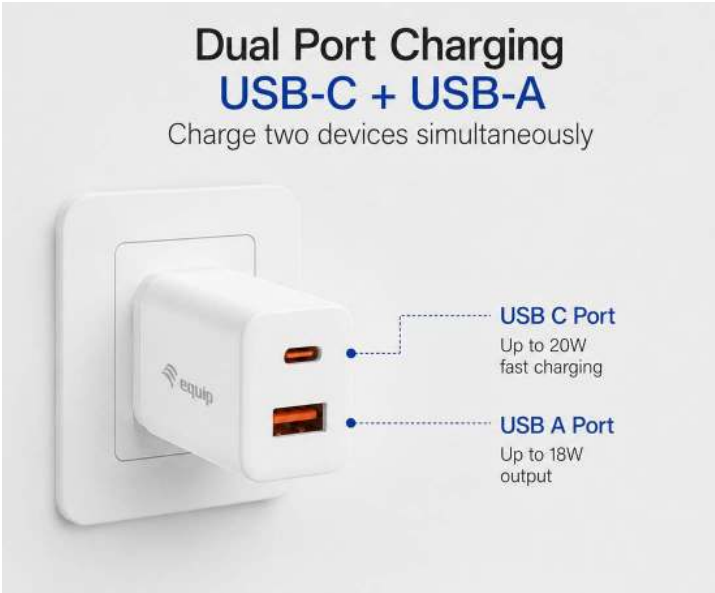

Equip® is a registered trademark of Digital Data Communications GmbH
© Copyright Digital Data Communications GmbH. All Rights Reserved.

PACKAGE CONTENTS

Lieferumfang | Contenido del paquete | Contenu de l'emballage | Csomag tartalma
Contenuto della confezione | Zawartość opakowania | Conteúdo da embalagem






SPECIFICATION

Spezifikation | Especificaciones | Spécifications | Specifiche | Műszaki adatok
Specyfikacja | Especificações

Model	245526/ 245536 (White)
AC Input	100.0 ~ 240.0V 50/60Hz, 0.6A max
DC Output	Input Voltage: 100-240V AC,50/60Hz, 0.6A USB-C Output: DC 5V⎓3A, 9V⎓2.22A, 12V⎓1.67A (Max. 20W) PPS: 3.3-11V⎓1.8A USB-A Output: 5V⎓3A, 9V⎓2A, 12V⎓1.5A (Max.18W) USB A+C Output: 5V⎓3A Shared (Max. 15W)
Total Output	20.0W Max
Average Efficiency (230VAC, 50Hz)	83.65% for PD 1: 5.0V/3.0A 85.65% for PD 1: 12.0V/1.67A
Efficiency at load 10% (230VAC, 50Hz)	78.97% for PD 1: 5.0V/3.0A 74.18% for PD 1: 12.0V/1.67A
No Load Power Consumption	≤0.5W
Protection	Short Circuit Protection Over Current Protection Over Voltage Protection
Operating temperature / humidity	0℃ ~ 35℃ / 20% ~ 80% RH
Storage temperature / humidity	-20℃ ~ 80℃ / 10% ~ 90% RH
Dimensions (W x D x H)	32 x 32 x 70mm
Weight	36g

INSTALLATION

Installation|Instalación|Installation|Installazione|Telepítés|Instalacjanstalação



Leistungsausgang|Salida de energía|Puissance de sortie|Potenza in uscita
Teljesítmény kime net |Moc wyjściowa|Saída de energia

2-PORT CHARGING

