
Autodesk


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/29	

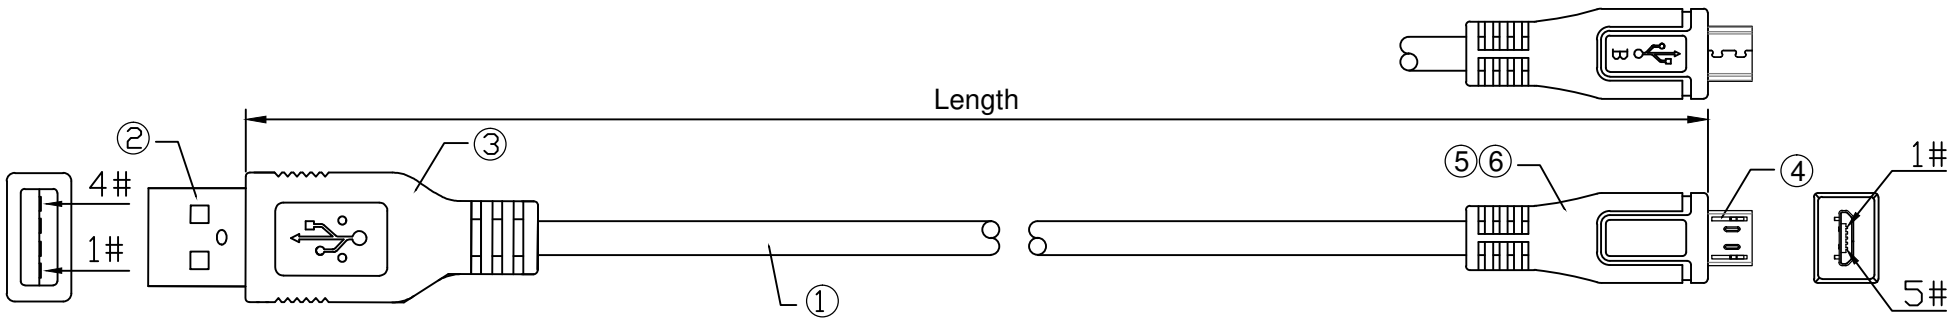


Cable Printing: USB 2.0 CABLE SHIELDED HIGH SPEED MADE IN CHINA

USB Micro B

CONNECTION

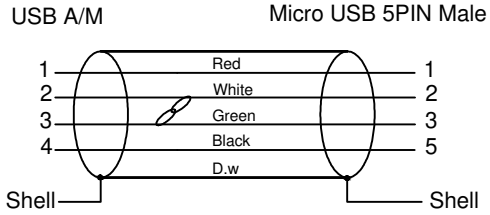



A)Conductor 7/0.12BC
B)Insulation HDPE 0.72mm(White/Green)
C)Conductor 17/0.15BC
D)Insulation PVC 1.2mm(Red/Black)
E)Al Foil
F)Drain wire 7/0.12CCS
G)Braiding: 64/0.12AL
J)Jacket OD:4.5±0.15mm Black

22+28AWG USB Cable Spec.

Remark:
1.100% Open/Short Test
2.Conductive Resistance:2ohms MAX
3.Insulation Resistance:5M ohm MIN.
4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB0005	0.5m
SB0006	1.0m
SB2498	2.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK
⑥	External Mold	Outer Mould 45P PVC, Black	1PC	
⑤	Innernal Mold	Inner Mould PE	1PC	
④	Connector	Micro USB Male, Nickle-Plated	1PC	
③	External Mold	Outer Mould 45P PVC, Black	1PC	
②	Connector	USB A Male, Nickle-Plated	1PC	
①	Cable	22+28 USB Cable OD:4.5mm 22+28 [7/.012BC(28AWG)+HDPE]*1P +[17/0.15BC (22AWG)+PVC]*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Black		

TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1

ERP NO.:				SAMPLE DWG NO:	
DOC No.:				REVISION	A0
CUSTOMER:				UNIT	mm
CUSTOMER P/N:				SCALE	NO
DESCRIPTION	22+28 USB A Male TO Micro B 5Pin			PAGE NO	1/1
				DATE	2019/11/29
APPROVAL		CHECKED		DRAWN	

Autodesk
Autodesk
Autodesk