




Alecto FR300OE English

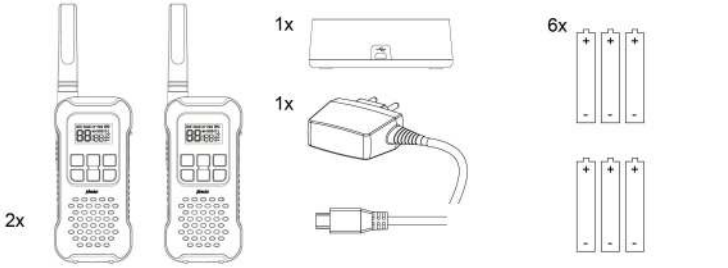


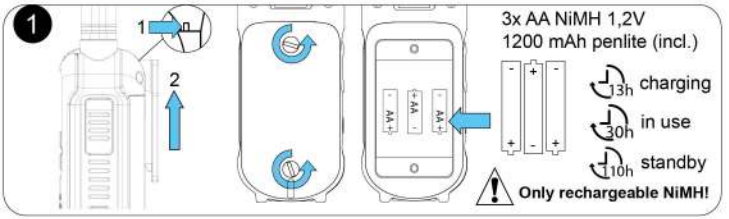


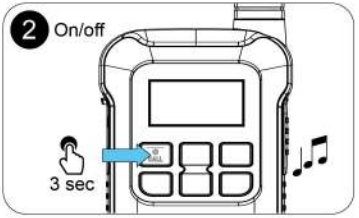


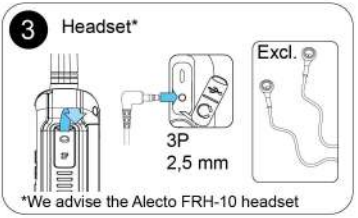

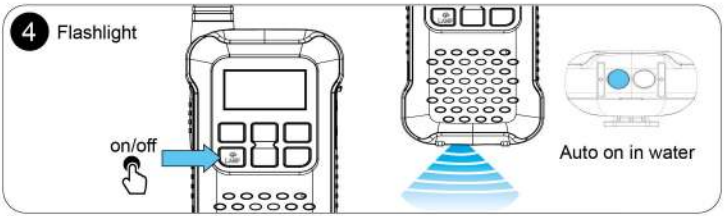


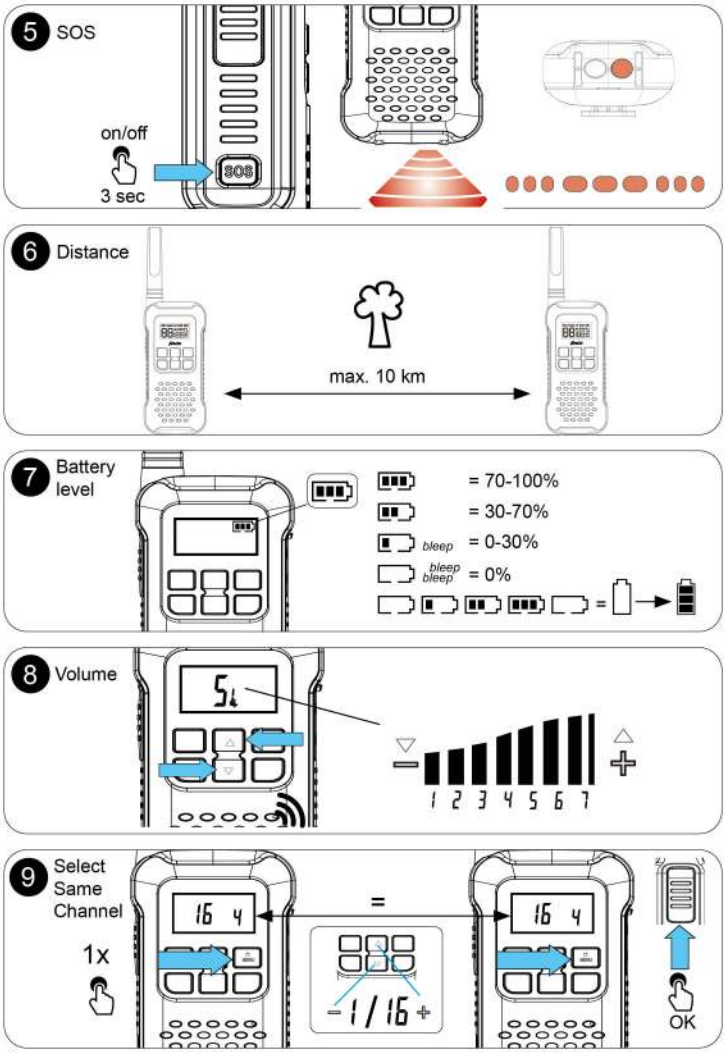
5 SOS
on/off
3 sec
SOS
6 Distance
max. 10 km
7 Battery level
= 70-100%
= 30-70%
bleep = 0-30%
bleep bleep = 0%
8 Volume
1 2 3 4 5 6 7
9 Select Same Channel
1x
OK

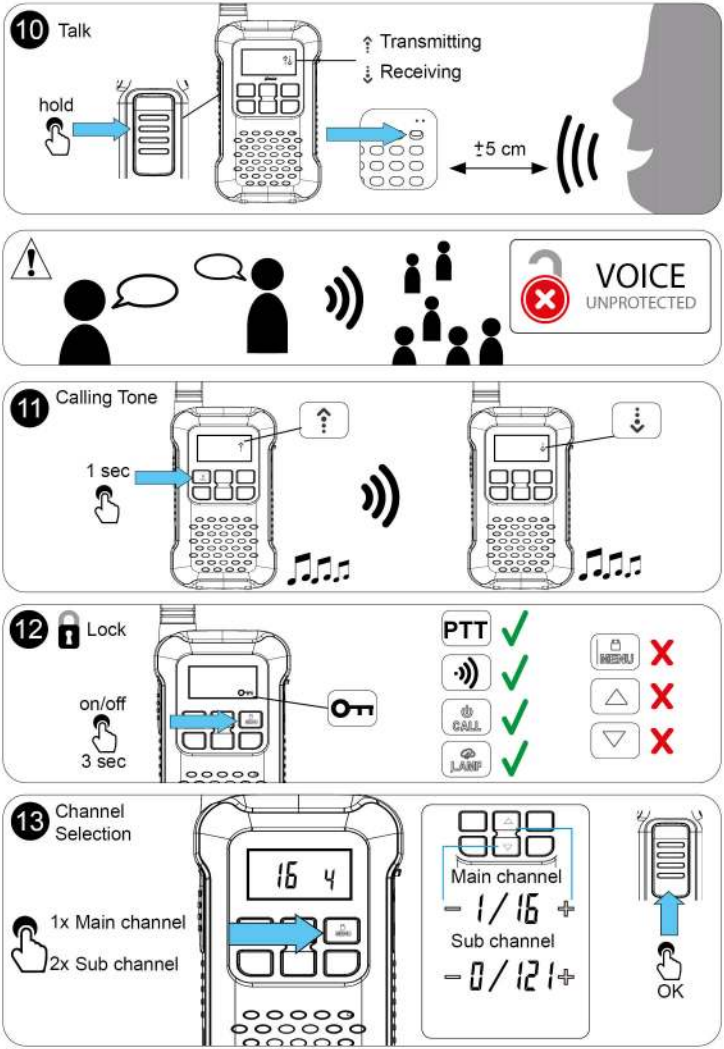
10 Talk
hold
Transmitting
Receiving
±5 cm
VOICE
UNPROTECTED
11 Calling Tone
1 sec
12 Lock
on/off
3 sec
PTT
MENU
CALL
LAMP
13 Channel Selection
1x Main channel
2x Sub channel
Main channel
Sub channel
OK

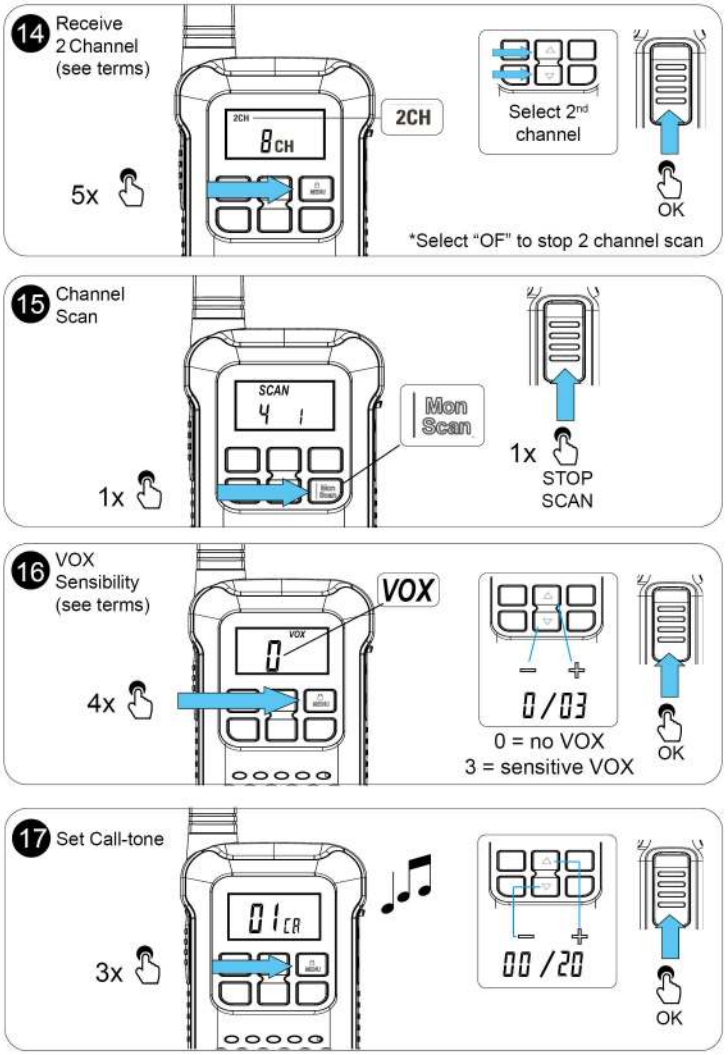
14 Receive 2 Channel (see terms)
5x
2CH
8CH
Select 2nd channel
OK
*Select "OFF" to stop 2 channel scan
15 Channel Scan
1x
SCAN
4 1
Mon Scan
1x
STOP SCAN
16 VOX Sensibility (see terms)
4x
VOX
0
0/03
0 = no VOX
3 = sensitive VOX
OK
17 Set Call-tone
3x
01CR
00/20
OK


18 Roger Beep On / Off*

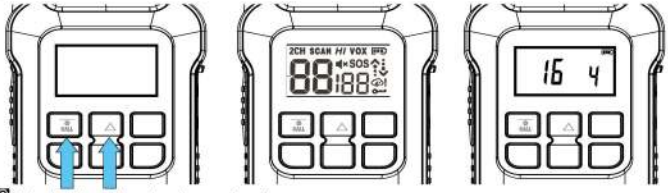

Hold both during start up

* Can only be changed during startup of FR300OE


19 Key-tone On / Off*

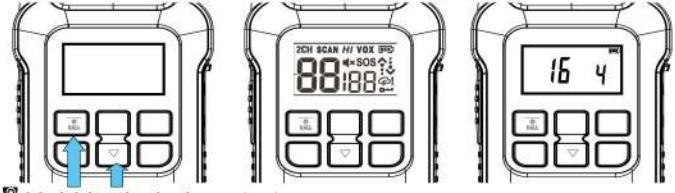


Hold both during start up


* Can only be changed during startup of FR300OE


20 Power by chargerpod

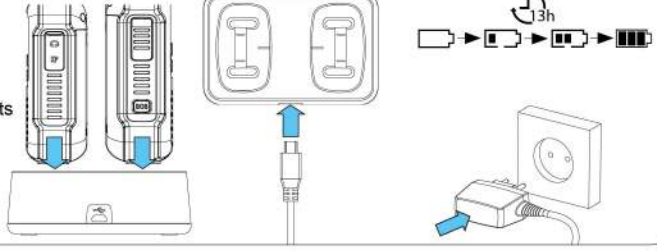

21 Power by cable







Information Power Adapter:
Manufacturers name and address : Shenzhen Tianyin Electronics Co., LTD, 2-6FL, Bldg9, Sanzhuli Industrial Park, Shuitian community Shiyan subdistrict, Bao'an District Shenzhen, Guangdong 518108, China
Model Identifier : TPA-97H050055VW01
Input voltage : 100-240VAC
Input AC frequency : 50/60 Hz
Output voltage : 5.0V DC
Output current : 0.55 A
Output Power : 2.75 W
Average active efficiency : 72.2 %
Efficiency at low 10% load : -
No load Power consumption : 0.07 W

!DO NOT USE NON RECHARGEABLE OR ALKALINE BATTERIES!
!ONLY USE RECHARGEABLE NIMH BATTERIES!

DECLARATION OF CONFORMITY
HEREBY, HESDO DECLARES THAT THE RADIO EQUIPMENT TYPE ALECTO FR300OE IS IN COMPLIANCE WITH DIRECTIVE 2014/53/EU. THE FULL TEXT OF THE EU DECLARATION OF CONFORMITY IS AVAILABLE AT THE FOLLOWING INTERNET ADDRESS:
http://DOC.hesdo.com/FR300OE-DOC.pdf

Use only supplied adapter



Input: 100-240V~
50/60Hz 100mA
Output: 5V ⎓ 550mA
Model: TPA-97H050055VW01



Frequency Range : 446.00625 - 446.19375 MHz
Maximum Power : < 6,5 dBm

Hesdo bv.
Aziëlaan 12, 5232 BA
's-Hertogenbosch
The Netherlands

www.alecto.com

IPX7 CE v2.1